

HOBART

BAXTER

Traulsen

WEIGHING

WRAPPING

REFRIGERATION

FOOD PREP

COOKING

BAKING

WAREWASHING

WASTE



**INSPIRED BY
GREAT FOOD
AND GREAT
PEOPLE**



2019
FOOD RETAIL
FULL LINE CATALOG

INSPIRED BY GREAT FOOD AND GREAT PEOPLE

WHAT INSPIRES US TO BE OUR VERY BEST? YOU!

We believe great food brings people together, and the relationships we share feed our inspiration to be the best we can be for one another. Likewise, we've been dedicated for more than a century to supporting those who are not only passionate about creating great food but are inspired by the people they serve and come to know on a daily basis.

Our Promise: Quality, Integrity & Customer Service

Since the beginning, it has been our goal to be the equipment and service partner foodservice and food retail professionals trust and desire most in delivering the very best in quality, integrity and customer service.

- **Quality** in our commitment to delivering the latest in technology innovation coupled with the most dependable, highest performing equipment on the market, designed specifically with our customers' needs in mind.
- **Integrity** in our commitment to supporting our customers with the most highly-trained people who genuinely care about helping them achieve their operational goals.
- **Customer Service** that is second to none when it comes to equipment selection, installation, ongoing maintenance and support.



Our promise is achieved through our continued commitment to our **Pillars of Differentiation:**

Quality & Performance—

We take pride in providing customers with most dependable equipment and service they can trust to outperform the competition in both quality and performance in the toughest, most demanding kitchen environments.

Lowest Total Cost of

Ownership—We are dedicated to providing our customers with the greatest energy and labor efficiencies combined with ongoing maintenance and support to prolong the life of equipment, saving time and money while delivering the highest lifecycle value.

Safety—In addition to ergonomic design for safe, easy operation, our equipment is designed with food safety in mind. Our equipment is easy to clean and routinely outperforms competitors and industry standards (NSF) in the most extreme kitchen environments.

Sustainability—Reducing our carbon footprint and greenhouse gas emissions as well as water and energy consumption is a critical factor in the design and manufacturing of our equipment. We are continuously investing in research and development and introducing technology advancements to meet or exceed industry standards.

GENERAL INFORMATION

Baxter Return Goods Policy & Warranty Statement	73
Hobart Return Goods Policy & Warranty Statement	89
Hobart Service Programs	90
Traulsen Warranty Statement	51

SCALES

Weighing Systems –	
Access – Stand Alone System	7
HTi, HTs & HTx Hand Wrap System	7
HTi Self-Service Scale	5
HTi, HTs & HTx Service Scales	4-5
Mechanical Scales	6
Price Computing and Portion Control Scale	6
Wrapping Systems –	
NGW	8
Semi-Automatic – CLAS System	9
Wrap Stations	10
Wrapping Systems Components –	
Roller Table	11
Rotary Bin	11
Sealer Belt	11
Straight Roller Conveyor	11

TRAULSEN REFRIGERATION

General Information –	
Options & Accessories	48-49
Quality & Value You Can See	12-15
Traulsen Innovations	47
Tray Slide & Shelf Versatility Chart	50
G-Series –	
Accessory Kits	22-24
Pass-Thru Solid Door & Glass Door Models	20-21
Reach-In Solid Door Models	16
Reach-In Glass Door Models	17
Reach-In Full Height Glass Door with LED Lights	18
Reach-In & Pass Thru Heated Cabinets	19
Understanding Traulsen Model Numbers – G Series	25
R & A Series –	
Pass-Thru Models	28
Reach-In Solid Door Models	26
Reach-In Glass Door Models	27
Roll-In & Roll-Thru Models	29
Understanding Traulsen Model Numbers –	
R & A Series Upright Models Only	30
RMC Series – Milk Coolers	34
Special Applications –	
Air Curtain Refrigerators	41
Convertible, One & Two Section	43
Correctional Facilities Applications –	
Refrigerators, Freezers & Hot Food Cabinets	45
Blast Chillers	46
Fish/Poultry File	40
Reach-In, -15° F Freezers	42
Reach-In, Even Thaw Refrigerators	41
Reach-In, Extra Wide Application	
Refrigerators, Freezers & Dual Temp	44
Reach-In, Sliding Glass Door	40
Wine Refrigerator	42
TB Series Glycol – Full Size Prep Table Models	38
TBC Series –	
Undercounter Quick Chiller Models	39
Undercounters, Reach-In & Roll-In/Roll-Thru	
Blast Chiller Models	39
TE Series – Equipment Stand Models	36

TS Series – Full Size Prep Table Models	37
TU Series – Full Size Undercounter Models	35
UHG Series – Glass Door Compact Undercounter Models	32
UHT & ULT Series – Compact Undercounter Models	31
UST & UPT Series – Compact Prep Table Models	33

FOOD PREPARATION

Cutter Mixer	55
Fat Percentage Measuring Kit	66
Food Cutters	63
Food Processors	60-61
Grinder	65
Meat Choppers	64
Meat Saws	65
Meat Tenderizer	63
Mixers –	
Attachments/Accessories	57-59
Planetary	56-57
Spiral	55
Mixer-Grinder	66
Prime Mixer-Grinder	66
Salad Dryers	54
Slicers	52-54
Vegetable Peelers	62

BAXTER COOKING & BAKING

Deck Ovens	70
Mini Proofing Cabinet	72
Proofing Cabinets & Retarding Proofing Cabinets	71
Rack Ovens –	
Single & Double Rack	67
Mini Rotating Rack	68
Specialty –	
Ingredient Bins	72
Water Meters	72
VersaOven™	69

COOKING

Ovens –	
Convection, Electric & Gas – Full Size	76
Convection, Electric & Gas – Half Size	75
Steamers	74-75

WAREWASHING & WASTE

Disposers	87
Accessories	88
Control Groups	88
Selection Factors and Ordering Data	86
Warewashers –	
Automatic Rack Conveyor	82
Blower-Dryer	83
Direct Drive Unloader	83
Electric Booster Heater	83
Side Loading Option	83
Door-Style	80-81
Low Temperature	79
Prep Washer	84
TurboWash II	85
Undercounter	77-78

Listed by UL, Certified by NSF, NTEP



HTi-7LH / HTs-7LS / HTx-7LS



HTi-7LS / HTs-7LS / HTx-7LS
Customer Display

HTi & HTx STANDARD FEATURES

- Video capability allowing independent videos to play on operator and customer displays simultaneously
- Intuitive and customizable graphical user interface
- Built-in wireless and wired Ethernet standard
- Best seller keys by scale/department
- Search database by description, key word or PLU number
- Swipe between three screens for operator ease of use
- Flashkeys can be laid out by categories or groups
- Product shelf life by days or hours
- Operator, product, and/or recipe notes
- Onscreen operator manual and tutorial videos
- COOL (country of origin labeling) can be created and modified on the scale
- Ability to require operator login
- Label graphics visible in supervisor mode
- Extensive scale backup in supervisor mode
- System can estimate number of additional records that may be added to the scale
- Default values for the four types of products; Fixed Weight, By Count, Random Weight, and Fluid Ounces
- UPC, EAN 13, EAN 128 Barcodes and GS1 DataBar
- Onscreen alphanumeric keyboard and keypad
- Cassette label loading system provides fast and efficient change of label stock
- Meets federal labeling requirements
- Track operator changes
- Remotely access the scale using Hobart specific software

HTs STANDARD FEATURES

- Video playback on operator display
- Intuitive and customizable graphical user interface
- Best seller keys by scale/department
- Search database by description, key word or PLU number
- Swipe between screens for operator ease of use
- Flashkeys can be laid out by categories or groups
- Product shelf life by days or hours
- Operator, product, and/or recipe notes
- Onscreen operator manual and tutorial videos
- COOL (country of origin labeling) can be created and modified on the scale
- Ability to require operator login
- Label graphics visible in supervisor mode
- Extensive scale backup in supervisor mode
- System can estimate number of additional records that may be added to the scale
- Default values for the four types of products; Fixed Weight, By Count, Random Weight, and Fluid Ounces
- UPC, EAN 13, EAN 128 Barcodes and GS1 DataBar
- Onscreen alphanumeric keyboard and keypad
- Cassette label loading system provides fast and efficient change of label stock
- Meets federal labeling requirements
- Track operator changes
- Remotely access the scale from your help desk

MODEL NO.	HTi	HTx (Windows)	HTs
Processor	IMX6 Dual	Intel®ATOM™ N2600 QUAD 1.2GHZ	IMX6 Solo
Operating System	Embedded Linux	WES7P	Embedded Linux
RAM (Standard) Minimum	1 GB DDR3 RAM	2 GB DDR3 RAM	1 GB DDR3 RAM
Program/Data Storage	16 GB	32 GB SATA DOM	8 GB
Program/Data Storage	32 GB	160 GB	32 GB
Operator Display Size(s)	10" wide TFT LCD, (1024x600) LED backlight, 5 wire touch		
Customer Display Size(s)	7" wide TFT LCD standard, Elevated 10" wide TFT LCD optional	7" wide TFT LCD, (Elevated optional), LED backlight	7" wide TFT LCD standard, Elevated 10" wide TFT LCD optional
Label Loading	Cassette Style		
Printer	2.25" wide label stock, 8 dot/mm printhead, 86mm/sec print speed	2.25" wide label stock, 8 dot/mm printhead, 125 mm/sec print speed	2.25" wide label stock, 8 dot/mm printhead, 86mm/sec print speed
USB Ports	(1) Int, (2) Ext, USB 2.0		
External Printer Options	Yes, multiple external printer support options	Yes, enhanced network printer support	No
Scanner	Image Scanner	Future release optical self-serve scanner (optional)	N/A
Appearance	Updated contemporary housing, same footprint as Quantum and HLX	Same footprint as HLX, Quantum New housing look and platter	Updated contemporary housing, same footprint as Quantum and HLX
Internet Browser	Standard		Optional
Video	Yes, HD, simultaneous operator and customer videos		Yes, HD resolution on operator side only
Audio	Dual stereo speakers (Internal), Headphone mini jack		Headphone mini jack
Scale Alerts	Yes, message alerts, network connectivity, printer, and planograms updates.		
Graphical User Interface (GUI)	Intelligent, industry leading GUI with swipe control		
# of Swipable Screens (GUI)	3	5	2
Flexible Screen Layouts	Yes, standard screen layouts with customization		
Wireless & Bluetooth	Wired and wireless 802.11 a/b/g/n (standard) Bluetooth 2.1 (optional)	802.11 a/b/g/n (standard) Bluetooth 2.1 (standard)	Ethernet wired (standard), wireless 802.11 a/b/g/n (optional)
Hands Free Login	Optional		N.A.
PDF Viewer	Optional	Standard	Optional

SERVICE SCALE (PC BASED)
HTi (SELF SERVICE SCALE)

Listed by UL, Certified by NTEP

STANDARD FEATURES

- Large elevated 14" touch screen display
- Intuitive and customizable graphical user interface
- Built-in wireless and wired Ethernet standard
- Best seller keys
- Search by image, description or PLU number
- COOL (country of origin labeling)
- UPC, EAN 13, EAN 128 Barcodes and GS1 DataBar
- Onscreen keypad
- Cassette label loading system provides fast and efficient change of label stock
- Meets federal labeling requirements
- Remotely access the scale using Hobart specific software
- Goes back to home page when not used for 30 seconds
- Onscreen prompts for ease of use
- Optional barcode scanner



Certified by NSF

**PS40****STANDARD FEATURES**

- Simple touch key operation
- Bright operator and customer backlit displays
- Audible beep response
- 6V 4-amp rechargeable battery comes standard
- Power cord comes standard
- Up to 50 programmable speed keys
- 30 lb. x .01 weighing
- Weight/price/total price displayed to 6 digits
- Small footprint – 13.9"W x 13"L x 4.9"H
- NSF Certified and legal for trade

Certified by NSF

**PR30****PR309****STANDARD FEATURES**

- Full temperature compensating mechanism for stability in environment changes
- Double face dials for readability from both sides of scale
- Two automatic dampeners reducing indicator oscillations for quick reading
- Easy to clean chrome finished housing
- Durable stainless steel pan for easy unloading and cleaning
- **PR30** meets or exceeds weights and measures H-44, Class III requirements
- **PR309** meets weights and measures H-44, Class IV requirements

SERVICE SCALE ACCESS – STAND ALONE SYSTEM

Listed by UL



STANDARD FEATURES

- Large color touch screen display (10.4")
- Flashkeys can be set up by categories or classes
- Go to keys allows user to jump immediately to a location instead of going through a menu tree
- Onscreen help questions and answers
- USB port can support external keyboard
- Functions as a web browser: simply plug into your hard-wired or wireless connection to access the internet or your own custom web site
- PC based architecture
- 1½", 2¼" and 3" wide labels up to 4" length for auto-apply
- Accepts up to 8" long labels for hand application
- Access EPP Printer: 120/60/1, 1.25 Amps, 150 Watts, 26.05 lbs. shipping weight
- Access EPCP Control Panel: 120/60/1, .50 Amps, 65 Watts, 15.9 lbs. shipping weight
- Weigher Capacity: 30 lb. x .01 lb. (30.09 maximum) or 50 lb. x .01 lb. (50.09 maximum)

SERVICE SCALE HTI, HTS & HTX HAND WRAP SYSTEM

Listed by UL



STANDARD FEATURES

- Linux operating system (HTs & HTi)
- Windows Embedded Standard 7 operating system (HTx)
- Ethernet and Wireless are standard (no additional components are necessary)
- 10.1" color touch operator display
- Flash keys and best sellers are easy to add, change and use reducing transaction times
- Intuitive operator display provides smooth, easy and informational navigation

Listed by UL

**STANDARD FEATURES**

- Small footprint to increase useable floor space
- Fully automatic – operator places package into the NGW; weighing, wrapping and labeling is all done automatically
- Integrated scale and label applier to reduce floor space requirements
- Auto off/on timer for heated sealer belt
- Hose-downable just like the meat saw or mixer grinder
- System automatically shuts down when not in use
- Swivel wand allows for label placement on all four corners of the meat package
- System allows for 2 way communication remote diagnostics/monitoring to maximize uptime
- Intuitive operator diagnostics to reduce service calls
- Package range up to 10" L X 16" W X 6" H

MODEL	NGW
WEIGHING	
Capacity	30 lbs. (Manual) 15 lbs. (Automatic mode)
Weighing increments – dual range capable	12 lb. x .005 and 30 lb. x .01 lb
Minimum weight to print	.20 lb
LABELING	
Label Width	1.5", 2.25" and 3.0"
Label Length	1.5" up to 4.0" in .5" inch increments
WRAPPING	
Package Size Width	4.5" minimum, 16" maximum
Length	4.5" minimum, 10.1" maximum
Height	.4" minimum, 6.0" maximum
Wrapping Speed	Maximum of 30 packages per minute
Number of Film Rolls	Up to 2 rolls
Type of Film Used	PVC
Film Thickness	60 gauge minimum, 100 gauge maximum
Film Core Size	3" I.D.
Film Maximum Diameter	9.5" O.D.
Film Widths	15" minimum, 20" maximum
ELECTRICAL	220 (4 wire-2 hot lines, neutral & ground) 60 cycle, 1 phase, 20 amps
SHIPPING WEIGHT	Approximately 1,300 lbs.

Listed by UL



STANDARD FEATURES

- **Compact Size** – Requires less floor space, smaller than conventional semi-automatic systems
 - **Package Size Range** – Small 1S tray (5" x 5") up to 12" x 16"
 - **Increases Productivity** – Typical operator can average 14 packages per minute and a second wrap station can be added
 - **Film Savings** – Wrap station can hold up to three sizes of film, film brake on wrap station assists in stretching of film
 - **Conveyor Scale** – Scale can be used for manual weighing of prepackaged product, weighs up to 30 lb. x .01 increments
 - **4 Position Swivel Wand** – Label can be rotated in all four directions for merchandising packages in the meat case, manually controlled at the EPP printer
 - **Positive Label Application** – Label is held in position during the transfer from the printer to the package
 - **Left to Right or Right to Left Configurations** – Operator has ease of access in either configuration
 - **Open Design** – Operator has full view of the meat packages
- Dimensions:** System: 8'11" x 2'6". CLA: 22" long x 24³/₈" wide x 65¹/₄" high
- Electrical:** CLA: 120/208-240 (3 wire)/60/1 14.5/8.0 amps
- Shipping Weight:** CLA – approximately 300 lbs

Listed by UL



W32
For use with wrapper



W32C
Free-Standing
Shown with optional 55A shelves



HWS-4
Requires a scale for free-standing unit

MODEL NO.	W32	W32C	HWS-4-C
Usage	Semi-Automatic	Free-Standing	Free-Standing
Frame	Aluminum	Aluminum	Stainless Steel
Wrapping Surface	Stainless Steel	Stainless Steel	Stainless Steel
Sealing Element	6" x 15" Optional Hotplate	8" x 15" Hotplate	6" x 15" Hotplate
Cutting Element	Low Temp. Heated Calrod	Low Temp. Heated Calrod	Low Temp. Stainless Steel Heated Rod
Dimensions			
Width x Length	25" x 12½" Without Shelves	22½" x 26" Without Shelves	52¼" Wide x 28" Deep Includes Shelves 27" Wide Without Shelves
Height	37" to 39½"	37" to 39½"	36¼"
Capacity	3 Rolls 8" to 18" – 3" Core Plug, Maximum OD 9½"		2 Rolls, Maximum OD 3" Core Plug, 8" to 20" Wide
Electrical	120/60/1	120/60/1	120/60/1
	1 Amp	8.5 Amp	8.5 Amp
Shipping Weight	50 lbs.	60 lbs.	90 lbs.

OPTIONAL EQUIPMENT FOR W32 AND W32C ONLY:

55A Platter Shelf – 22" long, 14" wide. Stainless steel shelf, aluminum mounting brackets. Shipping weight 10 lbs.

ROTARY BIN



RBG

MODEL NO.	RBG
Finish-Bin	Aluminum
Spindle	Stainless Steel
Dimensions	27" Diameter x 9" Deep
Height	28 ⁷ / ₈ " to 37 ¹ / ₂ "
Electrical	N/A
Motor	N/A
Shipping Weight	65 lbs.

Equipped with hard rubber casters on self lubricating bearings.

SEALER BELT

Listed by UL



SP-5

MODEL NO.	SP-5
Overall Dimension	42" L x 16 ⁵ / ₈ " W x 3 ¹ / ₈ " D (9" Deep at Motor)
Height: Intake	35 ¹ / ₂ " to 38"
Discharge	—
Sealer Belt	12" Wide; 330" Per Minute; Motor Driven
Electrical	208-240/60/3; 3 Wire; 6.5 Amp
Shipping Weight	75 lbs.

ROLLER DISCHARGE TABLE

Listed by UL



HRT

STANDARD FEATURES

- 3 foot work table with 2 foot adjustable input conveyor
- Sixty inches of total package accumulation on conveyor
- 14 gauge 304 stainless steel finish
- Meat tray storage underneath
- Available left-to-right or right-to-left configuration

STRAIGHT ROLLER CONVEYORS



CONV-EXT

STANDARD FEATURES

- Durable ³/₄" diameter aluminum rollers
- Attaches to CB-1108 or CLA
- Construction – Heavy gauge steel frame and legs with baked epoxy finish

The “Traulsen Difference” is much more than just a catchy advertising slogan. Rather it aptly sums up our overall philosophy of providing both high-quality and high ownership value in everything we do.

Let’s face it, there are less expensive refrigerators and freezers on the market. However, only the refrigeration equipment works 24/7 in your kitchen, and has the ability to lose \$100’s or \$1,000’s of product in a single day. Then of course there is the inconvenience. If your refrigeration fails it upsets your entire operation, so this is no place for compromises.

Traulsen recognizes this, so we design and build our equipment to really deliver for you in all the vital areas of importance to your business. Durability and reliable operation are just the beginning. They also offer you the benefit of energy efficiency, large storage capacity, ease of use, long equipment life, and a host of value-added features.



But most of all they are designed for performance. After all, temperature maintenance and recovery are absolutely critical to both food safety and controlling food costs, which is what refrigeration is all about. In this we excel, that’s why Traulsen has been the industry leader for seven decades and counting.

Refrigeration System

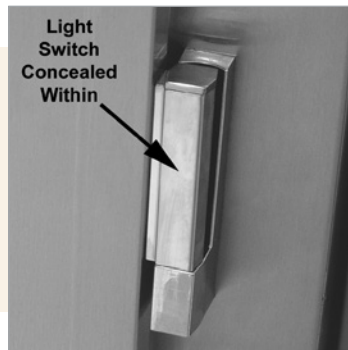


By combining carefully balanced, high quality components with precise microprocessor controls and careful construction, our systems cycle less often, and offers the energy efficiency you’re looking for while still providing the outstanding reliability and performance your operation needs.

Easy to Use Controls


Traulsen uses “plug & play” microprocessor controls which have no moving parts, are much more precise than typical electromechanical controls, and replaces several of the most common failing parts (such as the time clock and temp control), providing far greater reliability.

Concealed Light Switches




Traulsen solid door models include the light switch concealed inside every door hinge (even on half-height door models). This operates the interior lights automatically whenever the door is opened, while also protecting the switch from damage during loading/unloading.

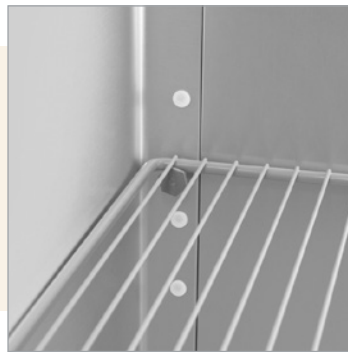Interior Arrangements



Each shelf has a rated capacity of 225 lbs. They span the entire inside width of the cabinet, are mounted on a pin system which does not require tools to remove, and don't ever need "junior" shelves between them. For convenience they are installed at the factory.

Condenser Cleaning



Cleaning the condenser coil is the single most important thing you can do to keep your refrigeration equipment operating efficiently. Traulsen locates this right behind the lift-up louver panel, facing front, making it so easy to clean this can be done in as little as a minute.

Metering Device



Use of a TXV allows for better temp recovery than possible with capillary tube designs. This is especially important during busy lunch and dinner periods where the doors are opened frequently. Your Traulsen will recover temperature quickly, keeping your food safe and minimizing shrink.

Heating System



By using large, low watt-density heating elements combined with low velocity fans, Traulsen's hot food holding cabinets offer outstanding performance with limited temperature stratification, most are ENERGY STAR® certified for efficiency, start-up quickly and greatly reduce lifetime service costs.

Warranty Terms



As the first in the industry to offer the 3 year parts and labor warranty, we are dedicated to providing the utmost security and confidence to our customers. Traulsen stands behind the performance and durability of its equipment, ensuring reliability in demanding kitchen environments.

Raised Metal Door Liner

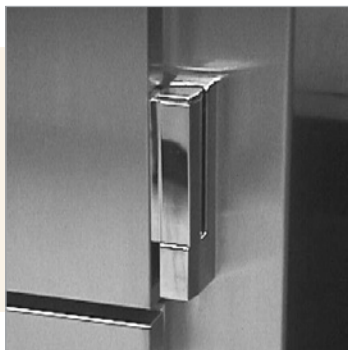


Much more durable than those made of plastic, they are unlikely to ever crack or break. Their raised design protects the gaskets from damage during loading and unloading. As a result the gaskets will likely have to be replaced less often than those of some other brands.


Metal Construction




The doors are metal. The handles are metal. The breaker caps are metal. There is no plastic seam surrounding the doors or cabinet front perimeter. There is nothing but high quality metal used throughout.

**Cam-Lift
Hinge Design**

Traulsen uses cam-lift type door hinges. These self-close at up to 90°, have a stay-open feature past 120°, and can be opened past 180° without damage. They are heavy duty and include a lifetime warranty.

Insulation

Traulsen insulates the entire cabinet, including the doors, with at least 2" foamed in place insulation. Not only does this provide superior insulating characteristics, but it also adds significant strength to our already rugged design.

**Air-Flow
Pattern**

Traulsen's clockwise air-flow pattern keeps cold air in and warm air out much better than back to front designs, which tend to spill cold air out on to the floor whenever opened. A key element is our rear biased return air-duct that protects the system from ingesting warm kitchen air whenever the door is opened.

Door Locks

Traulsen solid door units use only a sturdy cylinder type lock. The door lock catches upon a solid metal lock keeper mounted alongside, providing for a secure door closure. When any Traulsen door is locked closed, it stays closed!

STANDARD FEATURES

- Stainless steel exterior front finish
- Stainless steel exterior door finish
- Anodized aluminum sides (including returns) and interior
- Microprocessor control with LED display
- 115/60/1 voltage, self-contained, with cord and plug attached (208-230/115V 3-section freezers) (remote options available)
- Automatically activated LED light with concealed switch
- -10°F freezer capability (freezers only)
- Self-closing doors with stay open feature and locks
- Magnetic snap-in EZ-Clean door gaskets
- Three epoxy coated shelves per section
- Four 6" high casters with brakes
- Automatic, non-electric condensate evaporator
- Lifetime warranty on door hinges & handles
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**



G20010



ONE SECTION REACH-IN MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING	REFRIGERATORS	FREEZERS
29 $\frac{7}{8}$ " x 35" x 83 $\frac{3}{4}$ "	Full	Right	G10010	G12010
	Full	Left	G10011	G12011
	Half	Right	G10000	G12000
	Half	Left	G10001	G12001

TWO SECTION REACH-IN MODELS


WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING	REFRIGERATORS	FREEZERS
52 $\frac{1}{2}$ " x 35" x 83 $\frac{3}{4}$ "	Full	Left/Right	G20010	G22010
	Full	Right/Left	G20011	G22011
	Full	Right/Right	G20012	G22012
	Full	Left/Left	G20013	G22013
	Half	Left/Right	G20000	G22000
	Half	Right/Left	G20001	G22001
	Half	Right/Right	G20002	G22002
	Half	Left/Left	G20003	G22003

THREE SECTION REACH-IN MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING	REFRIGERATORS	FREEZERS
76 $\frac{5}{16}$ " x 35" x 83 $\frac{3}{4}$ "	Full	Left/Right/Right	G30010	G31310
	Full	Left/Left/Right	G30011	G31311
	Full	Right/Right/Right	G30012	G31312
	Full	Left/Left/Left	G30013	G31313
	Half	Left/Right/Right	G30000	G31300
	Half	Left/Left/Right	G30001	G31301
	Half	Right/Right/Right	G30002	G31302
	Half	Left/Left/Left	G30003	G31303

NOTE: All models available with optional R290 refrigerant if needed.

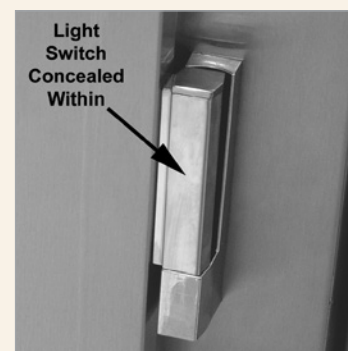Concealed Light Switches



Traulsen solid door models include the light switch concealed inside every door hinge (even on half-height door models). This operates the interior lights automatically whenever the door is opened, while also protecting the switch from damage during loading/unloading.



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

STANDARD FEATURES

- Stainless steel exterior front finish
- Anodized aluminum sides (including returns) and interior
- Microprocessor control with LED display
- 115/60/1 voltage, with cord and plug attached, consult factory for other voltages
- All models shown self-contained (remote options available)
- LED light with exterior switch
- Self-closing doors with stay open feature and locks
- Magnetic snap-in EZ-Clean door gaskets
- Three epoxy coated shelves per section
- Four 6" high casters with brakes
- Automatic, non-electric condensate evaporator
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

ONE SECTION REACH-IN GLASS DOOR MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING	REFRIGERATORS
29 $\frac{7}{8}$ " x 35" x 83 $\frac{3}{4}$ "	Full	Right	G11010
	Full	Left	G11011
	Half	Right	G11000
	Half	Left	G11001



G21000



TWO SECTION REACH-IN GLASS DOOR MODELS


WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING	REFRIGERATORS
52 $\frac{1}{2}$ " x 35" x 83 $\frac{3}{4}$ "	Full	Left/Right	G21010
	Full	Right/Left	G21011
	Full	Right/Right	G21012
	Full	Left/Left	G21013
	Half	Left/Right	G21000
	Half	Right/Left	G21001
	Half	Right/Right	G21002
	Half	Left/Left	G21003

THREE SECTION REACH-IN GLASS DOOR MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING	REFRIGERATORS
76 $\frac{5}{16}$ " x 35" x 83 $\frac{3}{4}$ "	Full	Left/Right/Right	G32010
	Full	Left/Left/Right	G32011
	Full	Right/Right/Right	G32012
	Full	Left/Left/Left	G32013
	Half	Left/Right/Right	G32000
	Half	Left/Left/Right	G32001
	Half	Right/Right/Right	G32002
	Half	Left/Left/Left	G32003

NOTE: All models available with optional R290 refrigerant if needed.

Metering Device



Use of a TXV allows for better temp recovery than possible with capillary tube designs. This is especially important during busy lunch and dinner periods where the doors are opened frequently. Your Traulsen will recover temperature quickly, keeping your food safe and minimizing shrink.



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

REACH-IN FULL HEIGHT GLASS DOOR WITH LED LIGHTS

STANDARD FEATURES

- Stainless steel exterior front finish
- Anodized aluminum sides (including returns) and interior
- Plug & play microprocessor control with LED display
- LED display lights – patented in-door design
- Self-closing door(s) with stay open feature & lock(s)
- 115/60/1 voltage, self-contained, with cord & plug attached
- EZ clean gasket
- Three (3) epoxy coated shelves on pins per section
- Four 6" high casters with brakes
- Automatic, non-electric condensate evaporator
- Guaranteed for life door hinges
- Three year parts & labor warranty
- Five year compressor warranty
- All models meet DOE 2017



G13011-023



G23010-023

ONE SECTION REACH-IN GLASS DOOR WITH LED LIGHTS MODELS

WIDTH x DEPTH x HEIGHT	DOOR HINGING	REFRIGERATORS	FREEZERS
29 ⁷ / ₈ " x 35" x 83 ⁷ / ₁₆ "	Right	G11010-043	G13010-023
	Left	G11011-043	G13011-023

TWO SECTION REACH-IN GLASS DOOR WITH LED LIGHTS MODELS

WIDTH x DEPTH x HEIGHT	DOOR HINGING	REFRIGERATORS	FREEZERS
52 ¹ / ₂ " x 35" x 83 ⁷ / ₁₆ "	Left/Right	G21010-043	G23010-023

THREE SECTION REACH-IN GLASS DOOR WITH LED LIGHTS MODELS

WIDTH x DEPTH x HEIGHT	DOOR HINGING	REFRIGERATORS	FREEZERS
76 ⁵ / ₁₆ " x 35" x 83 ⁷ / ₁₆ "	Left/Right/Right	G32010-043	G33010-023
	Left/Left/Right	G32011-043	G33011-023



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

HEATED CABINETS

REACH-IN & PASS-THRU MODELS

STANDARD FEATURES

- Stainless steel exterior front finish
- Stainless steel exterior door finish
- Anodized aluminum sides (including returns) and interior
- Plug and play microprocessor control with LED display
- Self-closing doors with stay open feature and locks
- Magnetic snap-in EZ-Clean door gaskets
- Three plated shelves per section
- Four 6" high casters with brakes
- Lifetime warranty on door hinges & handles
- Three year parts & labor warranty
- **All models meet DOE 2017**

ONE SECTION REACH-IN MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING	HEATED CABINETS
29 $\frac{7}{8}$ " x 35" x 83 $\frac{3}{4}$ "	Half	Right	G14300
	Half	Left	G14301
	Full	Right	G14310
	Full	Left	G14311

3-YEAR
PARTS & LABOR WARRANTY



G14310

TWO SECTION REACH-IN MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING	HEATED CABINETS
52 $\frac{1}{8}$ " x 35" x 83 $\frac{3}{4}$ "	Half	Left/Right	G24300
	Half	Right/Right	G24302
	Half	Left/Left	G24303
	Full	Left/Right	G24310
	Full	Right/Right	G24312
	Full	Left/Left	G24313



G24314P

ONE SECTION PASS-THRU MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING		HEATED CABINETS
		CONTROL SIDE	OTHER SIDE**	
29 $\frac{7}{8}$ " x 37 $\frac{15}{16}$ " x 83 $\frac{3}{4}$ "	Half	Right	Right	G14302P
	Half	Right	Left	G14303P
	Half	Left	Left	G14304P
	Half	Left	Right	G14305P
	Full	Right	Right	G14312P
	Full	Right	Left	G14313P
	Full	Left	Left	G14314P
	Full	Left	Right	G14315P


TWO SECTION PASS-THRU MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING		HEATED CABINETS
		CONTROL SIDE	OTHER SIDE**	
52 $\frac{1}{8}$ " x 37 $\frac{15}{16}$ " x 83 $\frac{3}{4}$ "	Half	Left/Right	Left/Right	G24304P
	Half	Left/Left	Left/Left	G24305P
	Half	Right/Right	Right/Right	G24307P
	Full	Left/Right	Left/Right	G24314P
	Full	Left/Left	Left/Left	G24315P
	Full	Right/Right	Right/Right	G24317P

NOTE: All models available with optional R290 refrigerant if needed.

** = Hinging when viewed from that side

Heating System



By using large, low watt-density heating elements combined with low velocity fans, Traulsen's hot food holding cabinets offer outstanding performance with no temperature stratification, are ENERGY STAR® certified for efficiency, start-up quickly and greatly reduce lifetime service costs.



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

REFRIGERATORS

PASS-THRU SOLID DOOR & GLASS DOOR MODELS

STANDARD FEATURES

- High quality stainless steel exterior front and doors
- Corrosion resistant anodized aluminum one-piece sides
- Durable anodized aluminum interior
- Microprocessor control with LED display
- Top-mounted, balanced, self-contained refrigeration system (remote options available)
- Large high humidity evaporator coil outside the food zone
- Load-sure guard protects against improper loading
- Full or half length stainless steel doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Guaranteed for life cam-lift hinges
- Guaranteed for life horizontal work flow door handles
- Automatically activated LED lights
- Damage resistant stainless steel breaker caps
- Three (3) adjustable epoxy coated shelves per section, supported on shelf pins (installed at the factory)
- Energy saving automatic non-electric condensate evaporator
- Magnetic snap-in EZ-Clean door gaskets
- Gasket-protecting anodized aluminum door liner
- Anti-condensate door perimeter heaters
- Thermostatic expansion valve metering device provides quick refrigeration recovery times
- Stainless steel one-piece louver assembly
- 9' (2.7 m) NEMA cord & 5-15P plug attached
- Set of four (4) 6" (15 cm) high casters with locks
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**



G10012P



ONE SECTION PASS-THRU SELF-CONTAINED SOLID DOOR MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING		REFRIGERATORS
		CONTROL SIDE	NON-CONTROL SIDE	
29 ⁷ / ₈ " x 37 ¹⁵ / ₁₆ " x 83 ¹ / ₄ "	Half	Right	Right	G10002P
	Half	Right	Left	G10003P
	Half	Left	Left	G10004P
	Half	Left	Right	G10005P
	Full	Right	Right	G10012P
	Full	Right	Left	G10013P
	Full	Left	Left	G10014P
	Full	Left	Right	G10015P

TWO SECTION PASS-THRU SELF-CONTAINED SOLID DOOR MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING		REFRIGERATORS
		CONTROL SIDE	NON-CONTROL SIDE	
52 ¹ / ₈ " x 37 ¹⁵ / ₁₆ " x 83 ¹ / ₄ "	Half	Left/Right	Left/Right	G20004P
	Half	Left/Left	Left/Left	G20005P
	Half	Right/Left	Right/Left	G20006P
	Half	Right/Right	Right/Right	G20007P
	Full	Left/Right	Left/Right	G20014P
	Full	Left/Left	Left/Left	G20015P
	Full	Right/Left	Right/Left	G20016P
	Full	Right/Right	Right/Right	G20017P

NOTE: All models available with optional R290 refrigerant if needed.



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

TWO SECTION PASS-THRU SELF-CONTAINED GLASS DOOR MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING		REFRIGERATORS
		CONTROL SIDE	NON-CONTROL SIDE	
52 $\frac{3}{8}$ " x 37 $\frac{15}{16}$ " x 83 $\frac{3}{4}$ "	Half	Left/Right	Left/Right	G21004P
	Half	Left/Left	Left/Left	G21005P
	Half	Right/Left	Right/Left	G21006P
	Half	Right/Right	Right/Right	G21007P
	Full	Left/Right	Left/Right	G21014P
	Full	Left/Left	Left/Left	G21015P
	Full	Right/Left	Right/Left	G21016P
	Full	Right/Right	Right/Right	G21017P


ONE SECTION PASS-THRU SELF-CONTAINED GLASS & SOLID DOOR COMBINATION MODELS

WIDTH x DEPTH x HEIGHT	CONTROL SIDE		NON-CONTROL SIDE		REFRIGERATORS
	DOOR LENGTH	DOOR HINGING	DOOR LENGTH	DOOR HINGING	
29 $\frac{7}{8}$ " x 37 $\frac{15}{16}$ " x 83 $\frac{3}{4}$ "	Solid Half	Right	Glass Half	Right	G16002P
	Solid Half	Right	Glass Half	Left	G16003P
	Solid Half	Left	Glass Half	Left	G16004P
	Solid Half	Left	Glass Half	Right	G16005P
	Solid Full	Right	Glass Full	Right	G16012P
	Solid Full	Right	Glass Full	Left	G16013P
	Solid Full	Left	Glass Full	Left	G16014P
	Solid Full	Left	Glass Full	Right	G16015P
	Glass Half	Right	Solid Half	Right	G17002P
	Glass Half	Right	Solid Half	Left	G17003P
	Glass Half	Left	Solid Half	Left	G17004P
	Glass Half	Left	Solid Half	Right	G17005P
	Glass Full	Right	Solid Full	Right	G17012P
	Glass Full	Right	Solid Full	Left	G17013P
	Glass Full	Left	Solid Full	Left	G17014P
	Glass Full	Right	Solid Full	Right	G17015P

TWO SECTION PASS-THRU SELF-CONTAINED GLASS & SOLID DOOR COMBINATION MODELS

WIDTH x DEPTH x HEIGHT	CONTROL SIDE		NON-CONTROL SIDE		REFRIGERATORS
	DOOR LENGTH	DOOR HINGING	DOOR LENGTH	DOOR HINGING	
52 $\frac{3}{8}$ " x 37 $\frac{15}{16}$ " x 83 $\frac{3}{4}$ "	Solid Half	Left/Right	Glass Half	Left/Right	G26004P
	Solid Half	Left/Left	Glass Half	Left/Left	G26005P
	Solid Half	Right/Left	Glass Half	Right/Left	G26006P
	Solid Half	Right/Right	Glass Half	Right/Right	G26007P
	Solid Full	Left/Right	Glass Full	Left/Right	G26014P
	Solid Full	Left/Left	Glass Full	Left/Left	G26015P
	Solid Full	Right/Left	Glass Full	Right/Left	G26016P
	Solid Full	Right/Right	Glass Full	Right/Right	G26017P
	Glass Half	Left/Right	Solid Half	Left/Right	G27004P
	Glass Half	Left/Left	Solid Half	Left/Left	G27005P
	Glass Half	Right/Left	Solid Half	Right/Left	G27006P
	Glass Half	Right/Right	Solid Half	Right/Right	G27007P
	Glass Full	Left/Right	Solid Full	Left/Right	G27014P
	Glass Full	Left/Left	Solid Full	Left/Left	G27015P
	Glass Full	Right/Left	Solid Full	Right/Left	G27016P
	Glass Full	Right/Right	Solid Full	Right/Right	G27017P

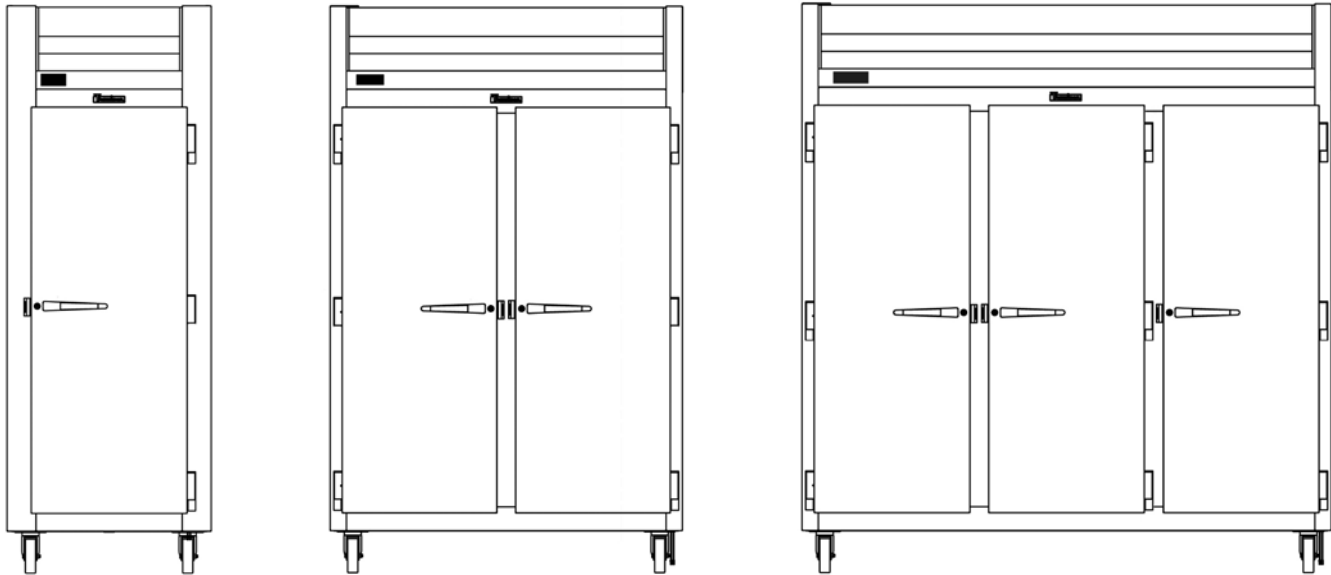NOTE: All models available with optional R290 refrigerant if needed.

**ONE SECTION MODELS**

G1ACC-TK1	8 Pairs #1 Tray Slides
G1ACC-TK2	2 Pairs #4 Tray Slides
G1ACC-TK4	7 Pairs Universal Tray Slides
G1ACC-SHLF1	3 Epoxy Coated Shelves on Pins
G1ACC-SHLF2	3 Epoxy Coated Shelves on Pilasters
G1ACC-SHLF3	3 Plated Shelves on Pins
G1ACC-SHLF4	3 Plated Shelves on Pilasters (Refrigerator & Freezer only)

TWO SECTION MODELS

LEFT	
G2ACC-TK1LR	8 Pairs #1 Tray Slides
G2ACC-TK2LR	2 Pairs #4 Tray Slides
G2ACC-TK4LR*	7 Pairs Universal Tray Slides
G2ACC-SHLF1	3 Epoxy Coated Shelves on Pins
G2ACC-SHLF2	3 Epoxy Coated Shelves on Pilasters
G2ACC-SHLF3	3 Plated Shelves on Pins
G2ACC-SHLF4	3 Plated Shelves on Pilasters (Refrigerator & Freezer only)
RIGHT	
G2ACC-TK1LR	8 Pairs #1 Tray Slides
G2ACC-TK2LR	2 Pairs #4 Tray Slides
G2ACC-TK4LR*	7 Pairs Universal Tray Slides
G2ACC-SHLF5	3 Epoxy Coated Shelves on Pins
G2ACC-SHLF6	3 Epoxy Coated Shelves on Pilasters
G2ACC-SHLF7	3 Plated Shelves on Pins
G2ACC-SHLF8	3 Plated Shelves on Pilasters

* Universal tray slides are excluded from two section heated cabinets.

THREE SECTION MODELS

LEFT	
G3ACC-TK1LR	8 Pairs #1 Tray Slides
G3ACC-TK2LR	2 Pairs #4 Tray Slides
G3ACC-TK4LR	7 Pairs Universal Tray Slides
G3ACC-SHLF1	3 Epoxy Coated Shelves on Pins
G3ACC-SHLF2	3 Epoxy Coated Shelves on Pilasters
G3ACC-SHLF3	3 Plated Shelves on Pins
G3ACC-SHLF4	3 Plated Shelves on Pilasters (Refrigerator & Freezer only)
CENTER	
G3ACC-TK1C	8 Pairs #1 Tray Slides
G3ACC-TK2C	2 Pairs #4 Tray Slides
G3ACC-TK4C	7 Pairs Universal Tray Slides
G3ACC-SHLF5	3 Epoxy Coated Shelves on Pins
G3ACC-SHLF6	3 Epoxy Coated Shelves on Pilasters
G3ACC-SHLF7	3 Plated Shelves on Pins
G3ACC-SHLF8	3 Plated Shelves on Pilasters
RIGHT	
G3ACC-TK1LR	8 Pairs #1 Tray Slides
G3ACC-TK2LR	2 Pairs #4 Tray Slides
G3ACC-TK4LR	7 Pairs Universal Tray Slides
G3ACC-SHLF9	3 Epoxy Coated Shelves on Pins
G3ACC-SHLF10	3 Epoxy Coated Shelves on Pilasters
G3ACC-SHLF11	3 Plated Shelves on Pins
G3ACC-SHLF12	3 Plated Shelves on Pilasters

EZ-CHANGE KITS

ONE & THREE SECTION MODELS (center only) (kits accommodate one half section)	
G13ACC-1EZ	4 Pairs #1 Tray Slides with Pilasters
G13ACC-UEZ	3 Pairs Universal with Pilasters
G13ACC-HDUEZ	3 Pairs Heavy Duty Universal with Pilasters
TWO & THREE SECTION MODELS (left & right only) (kits accommodate one half section)	
G23ACC-1EZ	4 Pairs #1 Tray Slides with Pilasters
G23ACC-UEZ	3 Pairs Universal with Pilasters*
G23ACC-HDUEZ	3 Pairs Heavy Duty Universal with Pilasters*
OTHER ACCESSORY KITS	
GSACC-1EZ	1 Pair #1 EZ Tray Slides
GSACC-UEZ	1 Pair Universal EZ Tray Slides*
GSACC-HDUEZ	1 Pair Heavy Duty Universal EZ Tray Slides*

* Only standard universal tray slides available for 2 section G Series heated cabinets.







ADDITIONAL SHELVES, TRAY SLIDES & SUPPORTS

(mounting hardware not included)

ONE SECTION MODELS	
G1ACC-SHLF1	3 Epoxy Coated Shelves on Pins
G1ACC-SHLF5	1 Epoxy Coated Shelf with Pins & Clips
TWO SECTION MODELS	
G2ACC-SHLF9	1 Epoxy Coated Shelf with Pins & Clips for Left Section
G2ACC-SHLF11	1 Epoxy Coated Shelf with Pins & Clips for Right Section
G23ACC-SHLF13	1 Plated Shelf with Pins & Clips (Hot Food Cabinets only)
THREE SECTION MODELS	
G3ACC-SHLF13	1 Epoxy Coated Shelf with Pins & Clips for Left Section
G3ACC-SHLF15	1 Epoxy Coated Shelf with Pins & Clips for Center Section
G3ACC-SHLF17	1 Epoxy Coated Shelf with Pins & Clips for Right Section
OTHER ACCESSORY KITS	
GSACC-#1TS	1 Pair #1 Type Tray Slides
GSACC-#4TS	1 Pair #4 Type Tray Slides
GSACC-UVTS	1 Pair Universal Type Tray Slides
GSACC-PLSTS	Mounting Hardware for Shelves on Pilasters & Clips**
GSACC-LEGS	Set of Four 6" High Legs
CK3	Set of Four 4 ⁵ / ₈ " High Casters

** Includes the mounting hardware only to allow the use of the existing shelving to replace the standard shelf pin arrangement of any model/section G-Series unit to have pilasters and clips instead.

TRAY SLIDES

#1 Tray Slides
Standard#4 Tray Slides
StandardUniversal Tray
Slides StandardEZ-CHANGE
TRAY SLIDES#1 Tray Slides
EZ-ChangeUniversal Tray Slides
EZ-ChangeHeavy-Duty
Universal Tray Slides
EZ-Change

TRAY SLIDES

DESCRIPTION	SPACING			
#1 TRAY SLIDES (NOT AVAILABLE FOR 2 SECTION G HEATED)*				
16 ga. stainless steel angle type for bottom support of: (1) 18" x 26" Pan or (2) 14" x 18" Pans	2"	3"	4"	5"
Behind full height door – all models	28	19	14	11
Behind upper half height door – all models	13	9	7	5
Behind lower half height door – all models	13	9	7	5
#1 Tray Slides – EZ-Change Interior (Not available for 2 section G Heated)*	2"		4"	
Behind full height door – all models	26		13	
Behind half height door – all models	12		6	
#4 TRAY SLIDES – STANDARD (NOT AVAILABLE FOR 2 SECTION G HEATED)*				
Plated steel rod type for rim support of: (1) 18" x 26" Pan (One pair of #4 tray slides accommodates one half section)	1-1/2"			
Behind full height door – all models	38			
Behind upper half height door – all models	18			
Behind lower half height door – all models	18			
UNIVERSAL TRAY SLIDES – STANDARD				
16 ga. stainless steel angle type for bottom support of: (1) 18" x 26" Pan or (2) 14" x 18" Pans or (2) 12" x 20" Pans	4"	5"	6"	
Behind full height door – all models	14	11	9	
Behind upper half height door – all models	6	5	4	
Behind lower half height door – all models	7	5	4	
Universal Tray Slides – EZ-Change Interior (Not available for 2 G Section Heated)	2-1/4"		4-1/2"	
Behind full height door – all models	22		11	
Behind half height door – all models	11		5	
Heavy-Duty Universal Tray Slides – EZ-Change Interior* (Not available for 2 G Section Heated)	4-1/2"		9"	
Behind full height door – all models	11		5	
Behind half height door – all models	5		2	

SHELVES (SOME SHELVES ARE NOT AVAILABLE FOR G HEATED)

CAPACITY	STD.	MAX.
Behind full height door mounted on standard shelf pins	3	9
Behind half height door mounted on standard shelf pins	3	8
Behind full height door mounted on optional pilasters	3	13 (4" spacing)
Behind half height door mounted on optional pilasters	3	12 (4" spacing)

NOTES:

- For all after market parts call Traulsen parts department 800-825-8220.
- The above quantities represent the maximum amount of tray slides recommended by Traulsen to achieve best air circulation and refrigeration performance.
- Optional tray slides are not available for Compact Undercounter, and Prep Tables models
- EZ-Change Interior Universal Tray Slides max weight 75 lbs. EZ-Change Heavy Duty Universal Tray Slides max weight 125 lbs.*
- #1, #4, universal and HD universal EZ change tray slides are not available for 2 section G Series heated cabinets.*
- All G-Series accessory kits are pre-packaged for easy installation at the job site.

G-SERIES REACH-IN MODEL NUMBERS

SERIES (1)	SECTIONS (2)	REFRIGERATOR/ FREEZER/HEATED (3)	VOLTAGE (4)	DOOR HEIGHT (5)	HINGING (6)	PASS THRU/ REMOTE (7)	REFRIGERATION SYSTEM (8)	REFRIGERANT TYPE (9)	LIGHTS (10)
G	1	0 = Solid Door Ref 1 = Glass Door Ref 2 = Solid Door Freezer 3 = Glass Door Freezer 4 = Hot Food 6 = Solid Front Door / Glass Rear Door Ref 7 = Glass Front Door / Solid Rear Door Ref	0 = 115/60/1 1 = 220/50/1 3 = 208-230/115/60/1	1 = Full 0 = Half	Refer to Price Book or Autoquotes	Pass Thru (P) Remote (R)	0 = Self Contained	4 = R450a 2 = R404a	3 = LED
G	2	0 = Solid Door Ref 1 = Glass Door Ref 2 = Solid Door Freezer 3 = Glass Door Freezer 4 = Hot Food 6 = Solid Front Door / Glass Rear Door Ref 7 = Glass Front Door / Solid Rear Door Ref	0 = 115/60/1 1 = 220/50/1 3 = 208-230/115/60/1	1 = Full 0 = Half	Refer to Price Book or Autoquotes	Pass Thru (P) Remote (R)	0 = Self Contained	4 = R450a 2 = R404a	3 = LED
G	3	0 = Solid Door Ref 1 = Freezer 2 = Glass Door Ref	0 = 115/60/1 1 = 220/50/1 3 = 208-230/115/60/1	1 = Full 0 = Half	Refer to Price Book or Autoquotes	Pass Thru (P) Remote (R)	0 = Self Contained	4 = R450a 2 = R404a	3 = LED

R290 G-SERIES REACH-IN MODEL NUMBERS

SERIES (1)	SECTIONS (2)	REFRIGERATOR/ FREEZER/HEATED (3)	VOLTAGE (4)	DOOR HEIGHT (5)	HINGING (6)	R290 REFRIGERATION SYSTEM (7)	REFRIGERANT TYPE (8)	LIGHTS (9)
G	1	0 = Solid Door Ref 1 = Glass Door Ref 2 = Freezer 6 = Solid Front Door / Glass Rear Door Ref 7 = Glass Front Door / Solid Rear Door Ref	0 = 115/60/1	0 = Half Reach-In 1 = Full Reach-In 4 = Half Pass-Thru 5 = Full Pass-Thru	Refer to Price Book or Autoquotes	0 = Self Contained	3 = R290	2 = LED
G	2	0 = Solid Door Ref 1 = Glass Door Ref 2 = Freezer 6 = Solid Front Door / Glass Rear Door Ref 7 = Glass Front Door / Solid Rear Door Ref	0 = 115/60/1	0 = Half Reach-In 1 = Full Reach-In 4 = Half Pass-Thru 5 = Full Pass-Thru	Refer to Price Book or Autoquotes	0 = Self Contained	3 = R290	2 = LED
G	3	0 = Solid Door Ref 1 = Freezer 2 = Glass Door Ref	0 = 115/60/1 3 = 208-230/115/60/1	0 = Half Reach-In 1 = Full Reach-In	Refer to Price Book or Autoquotes	0 = Self Contained	3 = R290	2 = LED

STANDARD FEATURES

- Stainless steel exterior
- Stainless steel interior (R-Series)
- Anodized aluminum interior (A-Series)
- Smart Control with full text display
- Self-contained, balanced refrigeration system (refrigerators & freezers) (remote options available)
- Standard operating temperature 34°F to 38°F (refrigerators), 0°F to -5°F (freezers), 135°F to 180°F (hot food cabinets)
- Self-closing doors with stay open feature
- Magnetic snap-in EZ-Clean door gaskets
- -10°F high capacity freezer application for high demand application
- Automatic non-electric condensate evaporator (refrigerators & freezers)
- StayClear™ condenser standard on reach-in and pass-thru models (exceptions – 126W, 132N, 132D)
- Three plated shelves per section
- Automatically activated LED lights
- Stainless steel breaker caps
- Four 6" high adjustable stainless steel legs
- Remote Glycol applications (refrigerator & freezer only, consult factory)
- Wine temperature application option (dual temps, "W" & "N" width models only)
- Lifetime warranty on door hinges & handles
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

**RHT132WUT-FHS****ONE SECTION REACH-IN MODELS**

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS	FREEZERS	HOT FOOD	DUAL TEMPS
32" x 35" x 83¼"	Full	RHT132EUT-FHS	RLT132EUT-FHS	Consult Factory	N/A
	Half	RHT132EUT-HHS	RLT132EUT-HHS	Consult Factory	Consult Factory
29⅞" x 35" x 83¼"	Full	RHT132WUT-FHS	RLT132WUT-FHS	RHF132W-FHS	N/A
	Half	RHT132WUT-HHS	RLT132WUT-HHS	RHF132W-HHS	RDT132WUT-HHS
29⅞" x 29" x 83¼"	Full	RHT126WUT-FHS	RLT126WUT-FHS	Consult Factory	N/A
	Half	RHT126WUT-HHS	RLT126WUT-HHS	Consult Factory	RDT126WUT-HHS
26⅜" x 35" x 83¼"	Full	RHT132NUT-FHS	RLT132NUT-FHS	Consult Factory	N/A
	Half	RHT132NUT-HHS	RLT132NUT-HHS	Consult Factory	Consult Factory
24" x 35" x 83¼"	Full	RHT132DUT-FHS	RLT132DUT-FHS	Consult Factory	N/A
	Half	RHT132DUT-HHS	RLT132DUT-HHS	Consult Factory	RDT132DUT-HHS

TWO SECTION REACH-IN MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS	FREEZERS	HOT FOOD	DUAL TEMP
58" x 35" x 83¼"	Full	RHT232WUT-FHS	RLT232WUT-FHS	RHF232W-FHS	RDT232WUT-FHS
	Half	RHT232WUT-HHS	RLT232WUT-HHS	RHF232W-HHS	RDT232WUT-HHS
58" x 29" x 83¼"	Full	RHT226WUT-FHS	RLT226WUT-FHS	Consult Factory	Consult Factory
	Half	RHT226WUT-HHS	RLT226WUT-HHS	Consult Factory	Consult Factory
52⅞" x 35" x 83¼"	Full	RHT232NUT-FHS	RLT232NUT-FHS	Consult Factory	RDT232NUT-FHS
	Half	RHT232NUT-HHS	RLT232NUT-HHS	Consult Factory	RDT232NUT-HHS
48" x 35" x 83¼"	Full	RHT232DUT-FHS	RLT232DUT-FHS	Consult Factory	RDT232DUT-FHS
	Half	RHT232DUT-HHS	RLT232DUT-HHS	Consult Factory	RDT232DUT-HHS

THREE SECTION REACH-IN MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS	FREEZERS	HOT FOOD	DUAL TEMP
86⅞" x 35" x 83¼"	Full	RHT332WUT-FHS	RLT332WUT-FHS	RHF332W-FHS	RDT332WUT-FHS
	Half	RHT332WUT-HHS	RLT332WUT-HHS	RHF332W-HHS	RDT332WUT-HHS
76⅝" x 35" x 83¼"	Full	RHT332NUT-FHS	RLT332NUT-FHS	Consult Factory	RDT332NUT-FHS
	Half	RHT332NUT-HHS	RLT332NUT-HHS	Consult Factory	RDT332NUT-HHS



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

All R-Series models are also available in the Traulsen A-Series which is identical to the R-Series, however, the A-Series models are built with an anodized aluminum cabinet interior.

REFRIGERATORS

REACH-IN GLASS DOOR MODELS

STANDARD FEATURES

- Stainless steel exterior
- Stainless steel interior (R-Series)
- Anodized aluminum interior (A-Series)
- Smart Control with full text display
- Self-contained, balanced refrigeration system (remote options available)
- Standard operating temperature 34°F to 38°F
- Self-closing doors with stay open feature
- Magnetic snap-in EZ-Clean door gaskets
- Lifetime warranty on cam-lift hinges*
- StayClear™ condenser standard
- Automatic non-electric condensate evaporator
- Three plated shelves per section
- LED lights with exterior switch*
- Vertical metal door handle(s)
- Stainless steel breaker caps*
- Four 6" high adjustable stainless steel legs
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

* Except sliding glass doors



RHT232WUT-HHG
shown with optional casters



All R-Series models are also available in the Traulsen A-Series which is identical to the R-Series, however, the A-Series models are built with an anodized aluminum cabinet interior.

ONE SECTION REACH-IN GLASS DOOR MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS
29 ⁷ / ₈ " x 35" x 83 ¹ / ₄ "	Full	RHT132WUT-FHG
	Half	RHT132WUT-HHG
29 ⁷ / ₈ " x 29" x 83 ¹ / ₄ "	Full	RHT126WUT-FHG
	Half	RHT126WUT-HHG
24" x 35" x 83 ¹ / ₄ "	Full	RHT132DUT-FHG
	Half	RHT132DUT-HHG

TWO SECTION REACH-IN GLASS DOOR MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS
58" x 35" x 83 ¹ / ₄ "	Full	RHT232WUT-FHG
	Half	RHT232WUT-HHG
58" x 29" x 83 ¹ / ₄ "	Full	RHT226WUT-FHG
	Half	RHT226WUT-HHG
52 ¹ / ₈ " x 35" x 83 ¹ / ₄ "	Full	RHT232NUT-FHG
	Half	RHT232NUT-HHG
48" x 35" x 83 ¹ / ₄ "	Full	RHT232DUT-FHG
	Half	RHT232DUT-HHG

THREE SECTION REACH-IN GLASS DOOR MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS
86 ¹ / ₈ " x 35" x 83 ¹ / ₄ "	Full	RHT332WUT-FHG
	Half	RHT332WUT-HHG
76 ⁵ / ₁₆ " x 35" x 83 ¹ / ₄ "	Full	RHT332NUT-FHG
	Half	RHT332NUT-HHG

TWO SECTION REACH-IN SLIDING GLASS DOOR MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS
58" x 33" x 83 ¹ / ₄ "	Full	RHT232WUT-FSL
	Half	RHT232WUT-HSL
52 ¹ / ₈ " x 33" x 83 ¹ / ₄ "	Full	RHT232NUT-FSL
	Half	RHT232NUT-HSL



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

Refrigeration System



By combining carefully balanced, high quality components with precise microprocessor controls and careful construction, our systems cycle less often, and offer the energy efficiency you're looking for while still providing the outstanding reliability and performance your operation needs.

STANDARD FEATURES

- Stainless steel exterior
- Stainless steel interior (R-Series)
- Anodized aluminum interior (A-Series)
- Smart Control with full text display
- Self-contained, balanced refrigeration system (remote options available)
- Standard operating temperature 34°F to 38°F (refrigerators), 135°F to 180°F (hot food cabinets)
- Self-closing doors with stay open feature
- Magnetic snap-in EZ-Clean door gaskets
- StayClear™ condenser standard
- Automatic non-electric condensate evaporator (refrigerators only)
- Three plated shelves per section
- Automatically activated incandescent lights
- Stainless steel breaker caps
- Four 6" high adjustable stainless steel legs
- Lifetime warranty on door hinges & handles
- Three year parts & labor warranty
- Five year compressor warranty (refrigerators only)
- **All models meet DOE 2017**

**RHT332WPUT-FHS****ONE SECTION PASS-THRU MODELS**


WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS	HOT FOOD
29 ⁷ / ₈ " x 37 ¹⁵ / ₁₆ " x 83 ¹ / ₄ "	Full	RHT132WPUT-FHS	RHF132WP-FHS
	Half	RHT132WPUT-HHS	RHF132WP-HHS
29 ⁷ / ₈ " x 31 ¹⁵ / ₁₆ " x 83 ¹ / ₄ "	Full	RHT126WPUT-FHS	N/A
	Half	RHT126WPUT-HHS	N/A

TWO SECTION PASS-THRU MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS	HOT FOOD
52 ¹ / ₈ " x 37 ¹⁵ / ₁₆ " x 83 ¹ / ₄ "	Full	RHT232NPUT-FHS	N/A
	Half	RHT232NPUT-HHS	N/A
58" x 37 ¹⁵ / ₁₆ " x 83 ¹ / ₄ "	Full	RHT232WPUT-FHS	RHF232WP-FHS
	Half	RHT232WPUT-HHS	RHF232WP-HHS
58" x 31 ¹⁵ / ₁₆ " x 83 ¹ / ₄ "	Full	RHT226WPUT-FHS	Consult Factory
	Half	RHT226WPUT-HHS	Consult Factory

THREE SECTION PASS-THRU MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS	HOT FOOD
76 ⁵ / ₁₆ " x 37 ¹⁵ / ₁₆ " x 83 ¹ / ₄ "	Full	RHT332NPUT-FHS	N/A
	Half	RHT332NPUT-HHS	N/A
86 ¹ / ₈ " x 37 ¹⁵ / ₁₆ " x 83 ¹ / ₄ "	Full	RHT332WPUT-FHS	RHF332WP-FHS
	Half	RHT332WPUT-HHS	RHF332WP-HHS

Heating System

By using large, low watt-density heating elements combined with low velocity fans, Traulsen's hot food holding cabinets offer outstanding performance with no temperature stratification, are ENERGY STAR® certified for efficiency, start-up quickly and greatly reduce lifetime service costs.



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

All R-Series models are also available in the Traulsen A-Series which is identical to the R-Series, however, the A-Series models are built with an anodized aluminum cabinet interior.

STANDARD FEATURES

- Stainless steel exterior
- Stainless steel interior (R-Series)
- Anodized aluminum interior (A-Series)
- Smart Control with full text display
- Self-contained, balanced refrigeration system (remote options available)
- Standard operating temperature 34°F to 38°F (refrigerators), 0°F to -5°F (freezers), 135°F to 180°F (hot food cabinets)
- Self-closing doors with stay open feature
- Magnetic snap-in EZ-Clean door gaskets
- -10°F high capacity freezer application for high demand application
- Automatic non-electric condensate evaporator
- Maximum rack size:
"L" height models = 27" w x 29" d x 66" h
"H" height models = 27" w x 29" d x 72" h
- Stainless steel breaker caps
- Remote Glycol applications (refrigerator & freezer only, consult factory)
- StayClear® condenser standard
- Lifetime warranty on door hinges & handles
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

**RRI132LUT-FHS****ONE SECTION ROLL-IN MODELS**

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	RACKS	REFRIGERATORS	FREEZERS	HOT FOOD
35½" x 35⅞" x 83¼"	Full	66" High	RRI132LUT-FHS	RIF132LUT-FHS	RIH132L-FHS
35½" x 35⅞" x 89⅞"	Full	72" High	RRI132HUT-FHS	RIF132HUT-FHS	RIH132H-FHS

ONE SECTION ROLL-THRU MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	RACKS	REFRIGERATORS	FREEZERS	HOT FOOD
35½" x 39⅞" x 83¼"	Full	66" High	RRI132LPUT-FHS	Consult Factory	RIH132LP-FHS

TWO SECTION ROLL-IN MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	RACKS	REFRIGERATORS	FREEZERS	HOT FOOD
68" x 35⅞" x 83¼"	Full	66" High	RRI232LUT-FHS	RIF232LUT-FHS	RIH232L-FHS
68" x 35⅞" x 89⅞"	Full	72" High	RRI232HUT-FHS	RIF232HUT-FHS	RIH232H-FHS

TWO SECTION ROLL-THRU MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	RACKS	REFRIGERATORS	FREEZERS	HOT FOOD
68" x 39⅞" x 83¼"	Full	66" High	RRI232LPUT-FHS	Consult Factory	RIH232LP-FHS

THREE SECTION ROLL-IN MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	RACKS	REFRIGERATORS	FREEZERS	HOT FOOD
100½" x 35⅞" x 83¼"	Full	66" High	RRI332LUT-FHS	RIF332LUT-FHS	RIH332L-FHS
100½" x 35⅞" x 89⅞"	Full	72" High	RRI332HUT-FHS	RIF332HUT-FHS	RIH332H-FHS

THREE SECTION ROLL-THRU MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	RACKS	REFRIGERATORS	FREEZERS	HOT FOOD
100½" x 39⅞" x 83¼"	Full	66" High	RRI332LPUT-FHS	Consult Factory	RIH332LP-FHS



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

All R-Series models are also available in the Traulsen A-Series which is identical to the R-Series, however, the A-Series models are built with an anodized aluminum cabinet interior.

R & A SERIES MODEL NUMBERS

R	HT	2	32	N	P	UT	FHS
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)

POSITION (1)

EXTERIOR & INTERIOR METAL FINISH

- R** Stainless Steel Exterior and Interior
- A** Stainless Steel Exterior, Anodized Aluminum Interior

POSITION (2)

TYPE OF CABINET

- HT** Refrigerator (reach-in/pass-thru)
- RI** Refrigerator (roll-in/roll-thru)
- LT** Freezer (reach-in)
- IF** Freezer (roll-in)
- DT** Dual Temp (refrigerator/freezer)
- DH** Dual Temp (refrigerator/heated cabinet)
- HF** Heated Cabinet (reach-in/pass-thru)
- IH** Heated Cabinet (roll-in/roll-thru)
- FS** Fish File (undercounter fish file model is FC)
- SL** -15°F Freezer
- ET** Even Thaw

POSITION (3)

NUMBER OF CABINET SECTIONS

POSITION (4)

DEPTH OF CABINET BODY IN INCHES

- 32" STANDARD
- 26" SLIM LINE

POSITION (5)

CABINET WIDTH (or roll-in rack height)

- N** 26-3/8" (1-section), 52-1/8" (2-section), 76-5/16" (3-section)
- W** 29-7/8" (1-section), 58" (2-section), 86-1/8" (3-section)
- D** 24" (1-section), 48" (2-section)
- K** 24" (1-section)
- E** 32" (1-section Steakhouse models only)
- L** Roll-In/Roll-Thru To Accommodate a 66" High Rack
- H** Roll-In/Roll-Thru To Accommodate a 72" High Rack

POSITION (6)

- If P is present, it is a Pass-Thru (or Roll-Thru)
- If P is not present, it is a Reach-In (or Roll-In)

POSITION (7)

If UT is present, the cabinet is Self-Contained with top-mounted condensing unit.

If UT is not present in this position, the cabinet is Remote (Condensing unit not furnished) or a heated cabinet.

POSITION (8)

- FHS** = Full-Length Stainless Steel Door(s)
- HHS** = Half-Length Stainless Steel Doors
- FHG** = Full-Length Hinged Glass Door(s)
- HHG** = Half-Length Hinged Glass Doors
- FSL** = Full-Length Sliding Glass Doors
- HSL** = Half-Length Sliding Glass Doors

STANDARD FEATURES

- Stainless steel exterior front, top, sides and door(s)
- Anodized aluminum interior
- Interior mounted thermometer
- 115/60/1 voltage, self-contained, with cord and plug attached
- Self-closing door(s) with stay open feature
- Magnetic snap-in EZ-Clean door gasket(s)
- Two powder-coated shelves per door
- 4" high casters
- Automatic, non-electric condensate evaporator
- Three year parts & labor warranty
- Five year compressor warranty
- All models meet DOE 2017



UHT60

COMPACT UNDERCOUNTER DOOR MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT	NUMBER DOORS	REFRIGERATORS	FREEZERS
27" x 30 ⁷ / ₈ " x 33 ¹ / ₂ "	1	UHT27	ULT27
48" x 30 ⁷ / ₈ " x 33 ¹ / ₂ "	2	UHT48	ULT48
60" x 30 ⁷ / ₈ " x 33 ¹ / ₂ "	2	UHT60	ULT60

COMPACT UNDERCOUNTER DRAWER MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT	NUMBER DRAWERS	REFRIGERATORS
27" x 31 ¹ / ₈ " x 33 ¹ / ₂ "	2	UHT27-D
60" x 31 ¹ / ₈ " x 33 ¹ / ₂ "	4	UHT60-DD

NOTE: All models available with optional R290 refrigerant if needed.



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

REFRIGERATOR

GLASS DOOR COMPACT UNDERCOUNTER MODELS

STANDARD FEATURES

- Stainless steel exterior front, top, sides & glass door(s)
- Anodized aluminum interior
- Interior mounted thermometer
- 115/60/1 voltage, self-contained, with cord & plug attached
- Self-closing door(s) with stay open feature
- Magnetic snap-in EZ-Clean door gasket(s)
- Two powder-coated shelves per door on pilasters
- Four or six 4" high casters
- Automatic, non-electric condensate evaporator
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**



UHG48LR-0420

GLASS DOOR COMPACT UNDERCOUNTER DOOR MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT	NUMBER DOORS	REFRIGERATORS
27" x 31 $\frac{1}{16}$ " x 35"	1	UHG27L0-0420
27" x 31 $\frac{1}{16}$ " x 35"	1	UHG27R0-0420
48" x 27 $\frac{7}{8}$ " x 35"	2	UHG48LR-0420
48" x 27 $\frac{7}{8}$ " x 35"	2	UHG48LL-0420
48" x 27 $\frac{7}{8}$ " x 35"	2	UHG48RR-0420
48" x 27 $\frac{7}{8}$ " x 35"	2	UHG48RL-0420



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

STANDARD FEATURES

- Stainless steel exterior front, sides and door(s)
- Stainless steel pan cover with pivoting front lid
- Full compliment of sixth size 4" deep plastic pans and divider bars included
- Reversible, full-length nylon cutting board
- 6" deep pan capacity
- Anodized aluminum interior
- Interior mounted thermometer
- Meets NSF 7 Standard for prep tables
- 115/60/1 voltage, self-contained, with cord and plug attached
- Self-closing door(s) with stay open feature
- Magnetic snap-in EZ-Clean door gasket(s)
- Two powder coated shelves per door
- 4" high casters
- Automatic non-electric condensate evaporator
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**



UST27 Door Model

COMPACT PREP TABLE DOOR MODELS, SELF-CONTAINED

WIDTH	DEPTH x HEIGHT		REFRIGERATORS	PAN CAPACITY*
	UST MODELS	UPT MODELS		
27"	33 $\frac{3}{8}$ " x 37 $\frac{7}{8}$ "	33 $\frac{3}{8}$ " x 42 $\frac{3}{4}$ "	UST276 / UPT276	6
27"	33 $\frac{3}{8}$ " x 37 $\frac{7}{8}$ "	33 $\frac{3}{4}$ " x 44"	UST279 / UPT279	9
32"	33 $\frac{3}{8}$ " x 37 $\frac{7}{8}$ "	33 $\frac{3}{8}$ " x 42 $\frac{3}{4}$ "	UST328 / UPT328	8
32"	33 $\frac{3}{4}$ " x 37 $\frac{7}{8}$ "	33 $\frac{3}{4}$ " x 44"	UST 3212 / UPT3212	12
48"	33 $\frac{3}{8}$ " x 37 $\frac{7}{8}$ "	33 $\frac{3}{4}$ " x 42 $\frac{3}{4}$ "	UST488 / UPT488	8
48"	33 $\frac{3}{8}$ " x 37 $\frac{7}{8}$ "	33 $\frac{3}{4}$ " x 42 $\frac{3}{4}$ "	UST4812 / UPT4812	12
48"	33 $\frac{3}{8}$ " x 37 $\frac{7}{8}$ "	33 $\frac{3}{4}$ " x 44"	UST4818 / UPT4818	18
60"	33 $\frac{3}{8}$ " x 37 $\frac{7}{8}$ "	33 $\frac{3}{4}$ " x 42 $\frac{3}{4}$ "	UST6012 / UPT6012	12
60"	33 $\frac{3}{8}$ " x 37 $\frac{7}{8}$ "	33 $\frac{3}{4}$ " x 44"	UST6024 / UPT6024	24
72"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 42 $\frac{3}{4}$ "	UST7212 / UPT7212	12
72"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 44"	UST7218 / UPT7218	18
72"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 44"	UST7224 / UPT7224	24
72"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 44"	UST7230 / UPT7230	30

* Capacity shown using sixth size pans

**Height overall – lid closed



UST48 Door Model

COMPACT PREP TABLE DRAWER MODELS, SELF-CONTAINED

WIDTH	DEPTH x HEIGHT		REFRIGERATORS	PAN CAPACITY
	UST MODELS	UPT MODELS		
27"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 42 $\frac{3}{4}$ "	UST276-D / UPT276-D	6
27"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 44"	UST279-D / UPT279-D	9
32"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 42 $\frac{3}{4}$ "	UST328-D / UPT328-D	8
32"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 44"	UST3212-D / UPT3212-D	12
60"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 42 $\frac{3}{4}$ "	UST6012-DD / UPT6012-DD	12
60"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 44"	UST6024-DD / UPT6024-DD	24
72"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 42 $\frac{3}{4}$ "	UST7212-DD / UPT7212-DD	12
72"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 44"	UST7218-DD / UPT7218-DD	18
72"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 44"	UST7224-DD / UPT7224-DD	24
72"	34 $\frac{1}{2}$ " x 37 $\frac{7}{8}$ "	34 $\frac{1}{2}$ " x 44"	UST7230-DD / UPT7230-DD	30



UST27 Drawer Model

NOTE: All models available with optional R290 refrigerant if needed.

STANDARD FEATURES

- Stainless steel exterior and interior
- Top mounted removable self-contained refrigeration system
- Forced air refrigeration system
- Accommodates 13" x 13" crate(s) 8, 12 or 16 capacity or 13" x 18" crate(s) 4, 6 or 8 capacity
- Single or double access models
- Sliding lift up and down door(s)
- Reinforced cabinet exterior bottom with dunnage rack
- Lockable insulated doors
- Metal door handles
- Magnetic snap-in EZ-Clean door gasket(s)
- 8' cord and plug attached
- Set of four (4) 6" or 4" factory mounted adjustable casters (6 for 58" models)
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**



RMC49D4



SINGLE ACCESS MODELS

WIDTH x DEPTH x HEIGHT	CRATE CAPACITY		CASTERS	MILK COOLERS
	13" x 13"	13" x 18"		
34" x 32½" x 46"	8	4	4"	RMC34S4
34" x 32½" x 48"	8	4	6"	RMC34S6
49" x 32½" x 46"	12	6	4"	RMC49S4
49" x 32½" x 48"	12	6	6"	RMC49S6
58" x 32½" x 46"	16	8	4"	RMC58S4
58" x 32½" x 48"	16	8	6"	RMC58S6

DOUBLE ACCESS MODELS

WIDTH x DEPTH x HEIGHT	CRATE CAPACITY		CASTERS	MILK COOLERS
	13" x 13"	13" x 18"		
34" x 34¼" x 46"	8	4	4"	RMC34D4
34" x 34¼" x 48"	8	4	6"	RMC34D6
49" x 34¼" x 46"	12	6	4"	RMC49D4
49" x 34¼" x 48"	12	6	6"	RMC49D6
58" x 34¼" x 46"	16	8	4"	RMC58D4
58" x 34¼" x 48"	16	8	6"	RMC58D6

STANDARD FEATURES

- Stainless steel front, door(s) and interior
- Microprocessor control
- Self-contained balanced refrigeration system (remote options available)
- Standard operating temperature 34°F to 38°F
- Automatic, condensate evaporator
- Two plated shelves per section
- Magnetic snap-in EZ-Clean door gasket(s)
- 6" high adjustable stainless steel legs
- Remote glycol refrigeration application and self-contained glycol or water cooled freezer application options
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**



TU072HT
shown with optional top and casters



FULL SIZE UNDERCOUNTER MODELS


LENGTH x DEPTH* x HEIGHT	NUMBER DOORS	REFRIGERATORS
44" x 34" x 34"	1	TU044HT
72" x 34" x 34"	2	TU072HT
100" x 34" x 34"	3	TU100HT

*Standard rear spacer bracket adds 2" to depth



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

Insulation



Traulsen insulates the entire cabinet, including the doors, with at least 2" foamed in place insulation. Not only does this provide superior insulating characteristics (total R-Factor 12.5), but it also adds significant strength to our already rugged design.

REFRIGERATORS & FREEZERS EQUIPMENT STANDS

(Traulsen's Equipment Stands are solely intended for use with cooking equipment.)



TE096HT



STANDARD FEATURES

- Stainless steel exterior and interior
- Stainless steel Marine top
- Microprocessor control
- Self-contained balanced refrigeration system (remote options available)
- Standard operating temperature 34°F to 38°F
- Automatic, condensate evaporator
- Self-closing drawers with stay open feature
- Magnetic snap-in EZ-Clean door gasket(s)
- Accommodates 400 lbs. per section
- Each drawer accommodates 6" deep pans
- 4" high casters
- Self-contained glycol or water cooled refrigerator application options
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

EQUIPMENT STAND MODELS

LENGTH x DEPTH* x HEIGHT	NUMBER DRAWERS	REFRIGERATORS	FREEZERS
36" x 34½" x 26"	2	TE036HT	N/A
48" x 34½" x 26"	2	TE048HT	TE048LT
60" x 34½" x 26"	2	TE060HT	TE060LT
72" x 34½" x 26"	4	TE072HT	TE072LT
84" x 34½" x 26"	4	TE084HT	TE084LT
96" x 34½" x 26"	6	TE096HT	N/A
110" x 34½" x 26"	6	TE110HT	N/A

* Depth overall – including handle



TS048HT
Shown with optional
composite cutting board



TS072HT



TS090HT

STANDARD FEATURES

- Stainless steel exterior and interior
- 115/60/1 voltage, self-contained, with cord and plug attached (remote options available)
- Microprocessor control with LED display
- Accommodates industry standard full and third size pans without the use of adapter bars
- Two (2) shelves per door
- 6" high casters on adjustable channel mounting system
- All doors provided with locks
- Left hand system only
- Self-closing door(s) with stay open feature
- Gasket-protecting stainless steel door liner
- Temperature rail equipped with drain and flush valve
- Automatic non-electric condensate evaporator
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**



WIDTH x DEPTH x HEIGHT	REFRIGERATORS	PAN CAPACITY*
48" x 36" x 48 $\frac{3}{8}$ "	TS048HT	6
66" x 36" x 48 $\frac{3}{8}$ "	TS066HT	9
72" x 36" x 48 $\frac{3}{8}$ "	TS072HT	10
90" x 36" x 48 $\frac{3}{8}$ "	TS090HT	12

*Capacity shown using third size pans

"All-Day" Temperature Performance to NSF7 Test Requirements



Traulsen's full size prep table is equipped with TempAssure, a specially engineered forced air design which circulates cold air around and underneath the pans as well as lofting a protective blanket over the food surface, effectively insulating it from warm kitchen air.


Customize Your Traulsen Full Size Prep Table with One or More of Our Many Accessories



Ambient Pan Holder




Garnish Rack



Scale Shelf



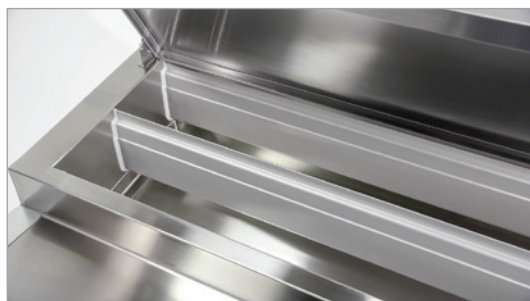Cutting Board & Ticket Rail



Glycol



TB091SL3S

STANDARD FEATURES

- Glycol system exceeds NSF requirements by maintaining food at or below 39° using specified 8" deep pans
- Stainless steel exterior & interior finish
- 115/60/1 self-contained system
- Horizontal finned T6 anodized chiller plates, holds 1/3, 1/6, or 1/9 size pans up to 8" deep (pans supplied by others)
- General fit 7.6" chiller bar spacing
- Compressor compartment right side
- Stainless steel lift-off night cover
- Sloped rail
- 14" white poly cutting board (2 row pan rail models)
- 8" white poly cutting board (3 row pan rail models)
- 20" stainless steel door(s), left or right hinge option
- Self-closing door(s) with stay open feature
- Metal door handle with gasket guard
- Magnetic snap-in door gasket(s)
- Two (2) shelves per door, on pilasters
- Expansion tank
- Heat exchanger and pump closely located from and in communication with refrigeration controls
- Thermostatic expansion valve metering device
- 6" casters
- 9' cord & plug attached
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

3-YEAR
 PARTS & LABOR WARRANTY

FULL SIZE PREP TABLES, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT	NUMBER DOORS	NUMBER ROWS	REFRIGERATORS	PAN CAPACITY*
46" x 32" x 42"	1	2	TB046SL2S	12
46" x 32" x 42"	1	3	TB046SL3S	18
60" x 32" x 42"	2	2	TB060SL2S	16
60" x 32" x 42"	2	3	TB060SL3S	24
65" x 32" x 42"	2	2	TB065SL2S	18
65" x 32" x 42"	2	3	TB065SL3S	27
71" x 32" x 42"	2	2	TB071SL2S	20
71" x 32" x 42"	2	3	TB071SL3S	30
91" x 32" x 42"	3	2	TB091SL2S	26
91" x 32" x 42"	3	3	TB091SL3S	39
113" x 32" x 42"	4	2	TB113SL2S	32

*Capacity shown using 1/6 size pans

BLAST CHILLERS

UNDERCOUNTER, REACH-IN & ROLL-IN / ROLL-THRU

STANDARD FEATURES

- Probe chill start
- Four operating modes
- Epicon common interface
- USB data exchange
- On-board printers
- Manual & auto programming
- Chill by time or temp
- Product recall
- Dual condensing units (excludes TBC5)
- Three removable small diameter probes
- Metal breakers
- Lifetime warranty on door hinges & handles
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

3-YEAR
PARTS & LABOR WARRANTY

UNDERCOUNTER MODELS

WIDTH x DEPTH x HEIGHT	BLAST CHILLERS	TRAY SLIDE LEVELS
54" x 34 $\frac{7}{16}$ " x 33 $\frac{3}{4}$ "	TBC5	5

REACH-IN MODELS

WIDTH x DEPTH x HEIGHT	BLAST CHILLERS	TRAY SLIDE LEVELS
41" x 34 $\frac{1}{2}$ " x 74"	TBC13	13

ROLL-IN & ROLL-THRU MODELS

WIDTH x DEPTH x HEIGHT	BLAST CHILLERS	RACK CAPACITY	TYPE
48 $\frac{1}{2}$ " x 37 $\frac{5}{8}$ " x 90 $\frac{3}{8}$ "	TBC1H	1	Roll-In
48 $\frac{1}{2}$ " x 41 $\frac{1}{4}$ " x 90 $\frac{3}{8}$ "	TBC1HR	1	Roll-Thru

ROLL-IN & ROLL-THRU MODELS

WIDTH x DEPTH x HEIGHT	BLAST CHILLERS	RACK CAPACITY	TYPE
48 $\frac{1}{2}$ " x 71 $\frac{5}{8}$ " x 90 $\frac{3}{8}$ "	TBC2H	2	Roll-In
48 $\frac{1}{2}$ " x 75 $\frac{1}{4}$ " x 90 $\frac{3}{8}$ "	TBC2HR	2	Roll-Thru

NOTE: Traulsen's Blast Chillers are solely intended for blast chilling, and not for use as holding cabinets



TBC5
(shown with optional casters)



TBC13
(shown with optional casters)



TBC1H

QUICK CHILLER

UNDERCOUNTER

STANDARD FEATURES

- Stainless steel exterior and interior
- Microprocessor control with LED display
- 115/60/1 voltage, self-contained, with cord and plug attached
- Left hand refrigeration system
- Condenser filter
- Non-electric automatic condensate evaporator
- Operates at 31°F to 35°F
- Two plated shelves on pins
- 6" high legs
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

WIDTH x DEPTH x HEIGHT	QUICK CHILLER
48" x 36" x 34"	TU048QC



TU048QC
(Shown with Optional Casters and Stainless Steel Top)

3-YEAR
PARTS & LABOR WARRANTY

NOTE: Traulsen's Quick Chillers are solely intended for chilling, and not for use as holding cabinets

REFRIGERATORS

REACH-IN, SLIDING GLASS DOOR

STANDARD FEATURES

- Self-closing sliding glass doors with Stay Open feature
- Three plated shelves per section
- Four 6" high stainless steel adjustable legs
- Stainless steel exterior and interior finish
- Microprocessor control with LED display
- 115/60/1 voltage, self-contained, with cord and plug attached
- LED lights with exterior switch
- Automatic, non-electric condensate evaporator
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

REACH-IN SLIDING GLASS DOOR REFRIGERATOR MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	SECTIONS	REFRIGERATORS
52 $\frac{1}{8}$ " x 83 $\frac{1}{4}$ " x 33"	Full	2	RHT232NUT-FSL
52 $\frac{1}{8}$ " x 83 $\frac{1}{4}$ " x 33"	Half	2	RHT232NUT-HSL
58" x 83 $\frac{1}{4}$ " x 33"	Full	2	RHT232WUT-FSL
58" x 83 $\frac{1}{4}$ " x 33"	Half	2	RHT232WUT-HSL



RHT232NUT-FSL

3-YEAR
PARTS & LABOR WARRANTY

REFRIGERATORS

FISH/POULTRY FILE

STANDARD FEATURES

- Stainless steel exterior and interior finish
- Digital temperature display
- 115/60/1 voltage; self-contained, with cord and plug attached
- Four stainless steel self-closing drawers per section
- Each drawer includes one specially designed storage pan
- Four 6" high adjustable stainless steel legs
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

RFS126NUT
(shown with optional casters)RFS226NUT
(shown with optional casters)

3-YEAR
PARTS & LABOR WARRANTY

REACH-IN MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT	NUMBER DRAWERS	REFRIGERATORS
28" x 29" x 83 $\frac{1}{4}$ "	4	RFS126NUT
52 $\frac{1}{8}$ " x 29" x 83 $\frac{1}{4}$ "	8	RFS226NUT

REFRIGERATORS

AIR CURTAIN REFRIGERATOR

STANDARD FEATURES

- Stainless steel exterior and interior finish
- Multi-fan 3-D air screen system
- Electronic control with two operating modes
- Automatic defrost with manual override feature
- Digital temperature display
- 220/60/1 voltage, self-contained with cord and plug attached
- Ten pairs of tray slides for 18" x 26" pans at 4½" spacing
- Full perimeter bumper
- Vertical door handle & flush mounted side grips on each side
- Rear mounted tubular handle
- Four 6" high casters with stress pads
- One year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**



RAC37-2

REACH-IN AIR-CURTAIN REFRIGERATOR MODELS

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	DOOR HINGING	REFRIGERATORS
32" x 37" x 78¾"	Full	Left	RAC37-1
	Full	Right	RAC37-2
	Half	Right	RAC37-18

REFRIGERATORS

REACH-IN, EVEN THAW

STANDARD FEATURES

- Reach-in models include 28 Pairs #1 type tray slides (14 per section)
- Four 6" high stainless steel adjustable legs
- Stainless steel exterior and interior finish
- 115/60/1 voltage, self-contained, with cord and plug attached
- Self-closing doors with Stay Open feature and locks
- Automatic, non-electric condensate evaporator
- Lifetime warranty on door handles and hinges
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**



RET232NUT-FHS
(shown with optional casters)

REACH-IN EVEN-THAW REFRIGERATOR MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	SECTIONS	REFRIGERATORS
32" x 35" x 83¾"	Full	1	RET132EUT-FHS
32" x 35" x 83¾"	Half	1	RET132EUT-HHS
52½" x 35" x 83¾"	Full	1	RET232NUT-FHS
52½" x 35" x 83¾"	Full	1	RET232NUT-HHS

FREEZERS REACH-IN, MINUS 15°F MODELS

STANDARD FEATURES

- LED lights
- Self-closing doors with stay open feature and locks
- Easy to clean profile gasket
- Three plated shelves per section
- Four 6" high stainless steel adjustable legs
- Stainless steel exterior and interior finish
- Microprocessor control with LED display
- 208/115/60/1 voltage, self-contained, with cord and plug attached
- Automatic condensate evaporator
- Lifetime warranty on door handles and hinges
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

3-YEAR
PARTS & LABOR WARRANTY



RSL232NUT

REACH-IN -15°F FREEZER MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT	DOOR	SECTIONS	REFRIGERATORS
52 $\frac{7}{8}$ " x 83 $\frac{1}{4}$ " x 35"	Consult Factory	2	RSL232NUT-
76 $\frac{1}{16}$ " x 83 $\frac{1}{4}$ " x 35"	Consult Factory	3	RSL332NUT-

REFRIGERATORS WINE REFRIGERATOR

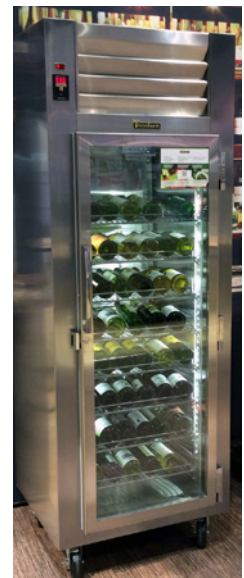
STANDARD FEATURES

- Microprocessor control system with LED display
- All metal construction, stainless steel interior and exterior
- 115/60/1 self-contained with cord and plug attached
- LED display hinged glass door(s)
- Self-closing doors with stay open feature & locks
- EZ-Clean gasket
- Display wine racks (7 per section)
- Set of four 6" adjustable stainless steel legs
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**

3-YEAR
PARTS & LABOR WARRANTY



Display Wine Racks
Racks can slide out & incline bottles



RH126W-WR02

WINE REFRIGERATOR MODELS – ONE & TWO SECTION

WIDTH x DEPTH x HEIGHT	SECTIONS	DOOR HINGING	REFRIGERATORS
29 $\frac{7}{8}$ " x 26" x 83 $\frac{3}{4}$ "	1	Left	RH126W-WR01
29 $\frac{7}{8}$ " x 26" x 83 $\frac{3}{4}$ "	1	Right	RH126W-WR02
58" x 26" x 83 $\frac{3}{4}$ "	2	Left/Right	RH226W-WR01

REFRIGERATORS OR FREEZERS CONVERTIBLE, ONE & TWO SECTION

STANDARD FEATURES

- R-Series: Stainless steel exterior and interior finish
- A-Series: Stainless steel exterior and anodized aluminum interior
- Microprocessor control with LED display
- 115/60/1 voltage (self-contained models with cord & plug attached)
- LED lights
- Self-closing doors with stay open feature and locks
- EZ-Clean gasket
- Three coated shelves per section on pins
- Four 6" high stainless steel adjustable legs
- Automatic non-electric condensate evaporator (self-contained models)
- Guaranteed for life door handles & hinges
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**



RCV132WUT-HHS
Shown with optional casters

ONE SECTION REACH-IN CONVERTIBLE REFRIGERATOR OR FREEZER MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS/FREEZERS
29 ⁷ / ₈ " x 35" x 83 ¹ / ₄ "	Full	RCV132WUT-FHS
	Half	RCV132WUT-HHS
	Full	ACV132WUT-FHS
	Half	ACV132WUT-HHS

TWO SECTION REACH-IN CONVERTIBLE REFRIGERATOR OR FREEZER MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS/FREEZERS
58" x 35" x 83 ¹ / ₄ "	Full	RCV232WUT-FHS
	Half	RCV232WUT-HHS
	Full	ACV232WUT-FHS
	Half	ACV232WUT-HHS



RCV132W-HHS

ONE SECTION REACH-IN CONVERTIBLE REFRIGERATOR OR FREEZER MODELS, REMOTE

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS/FREEZERS
29 ⁷ / ₈ " x 35" x 83 ¹ / ₄ "	Full	RCV132W-FHS
	Half	RCV132W-HHS
	Full	ACV132W-FHS
	Half	ACV132W-HHS

TWO SECTION REACH-IN CONVERTIBLE REFRIGERATOR OR FREEZER MODELS, REMOTE

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	REFRIGERATORS/FREEZERS
58" x 35" x 83 ¹ / ₄ "	Full	RCV232W-FHS
	Half	RCV232W-HHS
	Full	ACV232W-FHS
	Half	ACV232W-HHS

STANDARD FEATURES

- LED lights
- Self-closing doors with stay open feature and locks
- Refrigerator models: Three plated shelves
- Refrigerator/freezer models: One plated shelf per compartment
- R-Series: Stainless steel exterior and interior finish
- A-Series: Stainless steel exterior and anodized aluminum interior
- Microprocessor control with LED display
- 115/60/1 voltage, self-contained, with cord and plug attached
- Four 6" high stainless steel adjustable legs
- Automatic condensate evaporator
- Lifetime warranty on door handles and hinges
- Three year parts & labor warranty
- Five year compressor warranty
- **All models meet DOE 2017**



RDT132EUT-HHS
(Shown with optional casters)

REACH-IN STEAKHOUSE REFRIGERATOR MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	SECTIONS	REFRIGERATORS
32" x 83¼" x 35"	Full	1	RHT132EUT-FHS
32" x 83¼" x 35"	Half	1	RHT132EUT-HHS
32" x 83¼" x 35"	Full	1	AHT132EUT-FHS
32" x 83¼" x 35"	Half	1	AHT132EUT-HHS

REACH-IN STEAKHOUSE FREEZER MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	SECTIONS	REFRIGERATORS
32" x 83¼" x 35"	Full	1	RLT132EUT-FHS
32" x 83¼" x 35"	Half	1	RLT132EUT-HHS
32" x 83¼" x 35"	Full	1	ALT132EUT-FHS
32" x 83¼" x 35"	Half	1	ALT132EUT-HHS

REACH-IN STEAKHOUSE REFRIGERATOR/FREEZER MODELS, SELF-CONTAINED – ONE SECTION

WIDTH x DEPTH x HEIGHT	DOOR LENGTH	SECTIONS	REFRIGERATORS
32" x 83¼" x 35"	Full	1	RDT132EUT-FHS
32" x 83¼" x 35"	Half	1	RDT132EUT-HHS
32" x 83¼" x 35"	Full	1	ADT132EUT-FHS
32" x 83¼" x 35"	Half	1	ADT132EUT-HHS

STANDARD CORRECTIONAL FEATURES

- Locking hasps to secure contents with floor mounting holes
- Stainless steel legs with floor mounting holes
- Perforated screen system cover protects system
- Lexan cover protects controller
- Welded universal tray slides prevents removal
- Hinges without covers
- Tamper resistant screws secure all components
- **All models meet DOE 2017**

REFRIGERATOR REACH-IN & PASS-THRU MODELS

WIDTH x DEPTH x HEIGHT	SECTIONS	DOOR HINGING	REFRIGERATORS	TYPE
26 $\frac{3}{8}$ " x 35" x 83 $\frac{3}{4}$ "	1	Left	RH132N-COR01	Reach-In
26 $\frac{3}{8}$ " x 35" x 83 $\frac{3}{4}$ "	1	Right	RH132N-COR02	Reach-In
26 $\frac{3}{8}$ " x 37 $\frac{15}{16}$ " x 83 $\frac{3}{4}$ "	1	FHR/RHR	RH132NP-COR01	Pass-Thru
26 $\frac{3}{8}$ " x 37 $\frac{15}{16}$ " x 83 $\frac{3}{4}$ "	1	FHL/RHL	RH132NP-COR02	Pass-Thru
52 $\frac{1}{8}$ " x 35" x 83 $\frac{3}{4}$ "	2	Left/Right	RH232N-COR01	Reach-In
52 $\frac{1}{8}$ " x 37 $\frac{15}{16}$ " x 83 $\frac{3}{4}$ "	2	FHS/RHS	RH232NP-COR01	Pass-Thru



RH132N-COR01
(Correctional Reach-In Refrigerator)

REFRIGERATOR ROLL-IN & ROLL-THRU MODELS

WIDTH x DEPTH x HEIGHT	SECTIONS	DOOR HINGING	REFRIGERATORS	TYPE
35 $\frac{1}{2}$ " x 35 $\frac{9}{16}$ " x 83 $\frac{3}{4}$ "	1	Left	RR132L-COR01	Roll-In
35 $\frac{1}{2}$ " x 35 $\frac{9}{16}$ " x 83 $\frac{3}{4}$ "	1	Right	RR132L-COR02	Roll-In
35 $\frac{1}{2}$ " x 39 $\frac{1}{8}$ " x 83 $\frac{3}{4}$ "	1	FHR/RHR	RR132LP-COR01	Roll-Thru
35 $\frac{1}{2}$ " x 39 $\frac{1}{8}$ " x 83 $\frac{3}{4}$ "	1	FHL/RHL	RR132LP-COR02	Roll-Thru
68" x 35 $\frac{9}{16}$ " x 83 $\frac{3}{4}$ "	2	Left/Right	RR232L-COR01	Roll-In
68" x 39 $\frac{1}{8}$ " x 83 $\frac{3}{4}$ "	2	FHS/RHS	RR232LP-COR01	Roll-Thru

**FREEZER REACH-IN MODELS**

WIDTH x DEPTH x HEIGHT	SECTIONS	DOOR HINGING	FREEZERS	TYPE
26 $\frac{3}{8}$ " x 35" x 83 $\frac{3}{4}$ "	1	Left	RL132N-COR01	Reach-In
26 $\frac{3}{8}$ " x 35" x 83 $\frac{3}{4}$ "	1	Right	RL132N-COR02	Reach-In
52 $\frac{1}{8}$ " x 35" x 83 $\frac{3}{4}$ "	2	Left/Right	RL232N-COR01	Reach-In

HOT FOOD HOLDING REACH-IN & PASS-THRU MODELS

WIDTH x DEPTH x HEIGHT	SECTIONS	DOOR HINGING	REFRIGERATORS	TYPE
29 $\frac{7}{8}$ " x 35" x 83 $\frac{3}{4}$ "	1	Left	RW132W-COR01	Reach-In
29 $\frac{7}{8}$ " x 35" x 83 $\frac{3}{4}$ "	1	Right	RW132W-COR02	Reach-In
29 $\frac{7}{8}$ " x 37 $\frac{15}{16}$ " x 83 $\frac{3}{4}$ "	1	FHR/RHR	RW132WP-COR01	Pass-Thru
29 $\frac{7}{8}$ " x 37 $\frac{15}{16}$ " x 83 $\frac{3}{4}$ "	1	FHL/RHL	RW132WP-COR02	Pass-Thru
58" x 35" x 83 $\frac{3}{4}$ "	2	Left/Right	RW232W-COR01	Reach-In
58" x 37 $\frac{15}{16}$ " x 83 $\frac{3}{4}$ "	2	FHS/RHS	RW232WP-COR01	Pass-Thru

HOT FOOD HOLDING ROLL-IN & ROLL-THRU MODELS

WIDTH x DEPTH x HEIGHT	SECTIONS	DOOR HINGING	REFRIGERATORS	TYPE
35 $\frac{1}{2}$ " x 35 $\frac{9}{16}$ " x 83 $\frac{3}{4}$ "	1	Left	RI132L-COR01	Roll-In
35 $\frac{1}{2}$ " x 35 $\frac{9}{16}$ " x 83 $\frac{3}{4}$ "	1	Right	RI132L-COR02	Roll-In
35 $\frac{1}{2}$ " x 39 $\frac{1}{8}$ " x 83 $\frac{3}{4}$ "	1	FHR/RHR	RI132LP-COR01	Roll-Thru
35 $\frac{1}{2}$ " x 39 $\frac{1}{8}$ " x 83 $\frac{3}{4}$ "	1	FHL/RHL	RI132LP-COR02	Roll-Thru
68" x 35 $\frac{9}{16}$ " x 83 $\frac{3}{4}$ "	2	Left/Right	RI232L-COR01	Roll-In
68" x 39 $\frac{1}{8}$ " x 83 $\frac{3}{4}$ "	2	FHS/RHS	RI232LP-COR01	Roll-Thru

STANDARD CORRECTIONAL FEATURES

- Locking hasps to secure contents
- Stainless steel flanged legs prevents tipping over
- Perforated screen system cover protects system
- Lexan cover protects controller
- Welded universal tray slides prevents removal
- Hinges without covers
- Tamper resistant screws secures all components
- All models meet DOE 2017



TBC13-COR01
(shown with optional casters)

Correctional
features not
shown on
either model




TBC1H-COR01

BLAST CHILLER MODELS

WIDTH x DEPTH x HEIGHT	SECTIONS	DOOR HINGING	REFRIGERATORS	TYPE
34" x 41½" x 80½"	1	Left	TBC13-COR01	Reach-In
48½" x 37½" x 89½"	1	Left	TBC1H-COR01	Roll-In
48½" x 41½" x 89½"	1	Left	TBC1HR-COR01	Roll-Thru
48½" x 41½" x 89½"	1	Right	TBC1HR-COR02	Roll-Thru

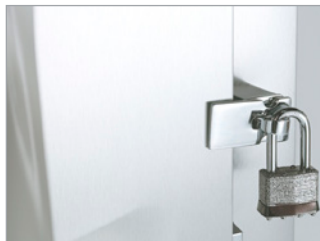Standard Features for all Correctional Application Models



Locking Hasp



Flanged Legs



**Security System
Perforated Top Cover**



Lexan Cover



Welded Tray Slices
(Reach-In/Pass-Thru Models Only)
(12 pairs per section)



Hinges without Covers



Security Screws

Featuring the industry's first 3-YEAR PARTS & LABOR WARRANTY on all units

**EZ-Open
Foot Pedal**

This ergonomically-friendly option, is offset from the door and positioned close to the floor. To open your cabinet, simply press the pedal with the ball of your foot.

By adding the EZ-Open Foot Pedal to your cabinet, you can:

Reduce Spills – Product can be secured with both hands minimizing the possibility of contact with a moving door.

Support Sanitation Efforts – Fewer spills reduce the possibility of cross-contamination.

Ease Of Access – EZ-Open Foot Pedal compliments our standard stay-open door feature.

**EZ-Change
Interiors**

With this option, pilasters can quickly and easily be placed over your unit's side-mounted shoulder screws and moved into place . . . by hand and without tools. Also, the 16-gauge stainless steel tray slides simply drop into labeled grooves to ensure proper alignment.

By adding the EZ-Change Interiors to your unit, you can:

Enjoy Time-Saving Versatility – Quick, no-tools reconfiguration helps you create the space you need, when you need it.

Minimize Spills – EZ-Change tray slides hold up to 100 pounds without bending. For big jobs, consider our heavy-duty tray slides which support up to 150 pounds of product.

Support Sanitation Efforts – All pilasters are dishwasher-safe.

Smart Services*

One year remote monitoring included

* Optional accessories. Consult your representation for details.

**EZ-Clean
Gasket**

Fits most hot and cold Traulsen units. Our gasket works with your team supporting food quality and safety.

The EZ-Clean Gasket in your Traulsen unit:

Supports Sanitation Efforts – Unlike others available on the market, the EZ-Clean Gasket has a one fold or “bellow” design, which facilitates finding and eliminating dirt and mold.

Saves Time and Effort – Quick cleaning with just the use of sanitizer and a wash cloth. No additional tools required.

Reduces Replacement Costs – Independent lab testing indicates a lifespan increase of at least 50% over standard PVC gaskets.

**StayClear™ Coil
(standard on many
R & A Models)**

When adding this option, you can install your cabinet with minimal concern about missed condenser cleanings. In fact, test lab research indicates that you may never have to clean this coil. Ever!

In relation to compressor performance, the StayClear™ Condenser Coils' efficiency remains consistent because under typical commercial conditions it never needs to be cleaned.

By choosing a StayClear™ Condenser Coil for your cabinet, you can:

Enjoy Ease of Maintenance – Without fins, dust and dirt have virtually no surface area to cling to making regular coil cleanings unnecessary.

Save Money – In energy savings alone, the addition of the StayClear™ Condenser Coils pay for themselves within about the first two years of use (based on \$.11/kWh, under typical commercial kitchen conditions).

Preserve Factory Performance – Compressors work harder when air flow is inhibited by dirty condenser coils. StayClear™ Condenser Coils facilitate ample air flow passage into the condenser while extending your compressor's life.



Tray Slides



Kool Klad Decor



Correctional Application



Additional Shelves



Drawers in Lieu of Doors



Flanged Legs

Options for R & A Series Reach-In/Pass-Thru

Additional Plated Shelves

Add up to a total of nine plated shelves (8 on half-door models) per section on pins (except 1-section dual-temp models), and up to 13 (12 on half-door models) if mounted on optional pilasters at 4" spacing.

Stainless Steel Shelves

Ideal for when jobsite conditions require an alternative to standard plated shelves.

#1 Tray Slides

16 gauge stainless steel angle type tray slides for bottom support of either one 18" x 26" pan or two 14" x 18" pans.

#4 Tray Slides

Plated steel rod type tray slides mounted on a steel frame for rim support of 18" x 26" pans. **Each pair can accommodate a maximum of 19 pans at 1-1/2" increments**, and equips one half cabinet section (actual pan capacities may vary depending upon cabinet type and door size).

Universal Tray Slides

16 gauge steel angle type tray slides for bottom support of one 18" x 26", two 14" x 18" or two 12" x 20" pans.

Reach-In Drawers

Replace the bottom half door with two or three drawers for convenient pan storage.

6" or 4⁵/₈" High Casters

Set of four, plate type casters, two with locks, mount easily at the bottom of any Traulsen reach-in or pass-thru model, allowing them to be moved on-site for easy cleaning underneath.

Locking Hasp(s)

Available in both single or double styles (depending upon model and door hinging), allows you to secure your valuable food stuffs with a simple padlock.

Kool Klad Laminate Decor

Match your kitchen decor from among the many colors of the Wilsonart® rainbow (other manufacturer's laminates also available).

6" High Flanged Legs

Allows your Traulsen model to be secured to the floor, when required for seismic and marine applications.

Correctional Application Package

Combines several features to secure cabinet for use in a corrections facility.

Options for TU & TE Models

Flat Stainless Steel Top



Provides a flat work surface on top of any full-size undercounter. Note that an optional stainless steel top is required if it is being used to support equipment weighing in excess of 100 lbs. or producing heat in excess of 140°F to the top surface. Similar tops with either a Drip Guard Edge or Backsplash are also available. Equipment stand models are supplied standard with a stainless steel marine top with drip guard edge.

Stainless Steel Back

Provides a finished look for any full-size undercounter or equipment stand when not placed against a wall.

Cabinet Extension Sections

Allows you to extend the width of your equipment stand by 6".

**Drawers In Lieu Of Doors****6" High Casters or Legs****6" Cabinet Extension Section****Flat Stainless Steel Top****Single Locking Hasp****Special Roll-In Rack for TBC1H & TBC2H****Drawers In Lieu of Doors**

Full-size undercounters can be modified to replace one door with two or three drawers.

Doors In Lieu of Drawers

Equipment stand models can be modified to replace two drawers with one door.

#1 Tray Slides

16 gauge stainless steel angle type tray slides for bottom support of either one 18" x 26" pan or two 14" x 18" pans.

Additional Plated Shelves**Universal Tray Slides**

16 gauge steel angle type tray slides for bottom support of one 18" x 26", two 14" x 18" or two 12" x 20" pans.

6" High Casters

Set of six or eight, plate type casters, half with locks, mount easily at the bottom of any Traulsen full-size undercounter, allowing them to be moved on-site for easy cleaning underneath.

Options for Blast Chill Models**Condensate Evaporator Kits**

Choose from 208V bottom-mounted (model TBC13 only) and 115V floor mounted (models TBC1H, TBC1HR, TBC2H and TBC2HR only).

Stainless Steel Back for TBC5**Special Roll-In Rack for TBC1HR & TBC2HR**

Purchase a rack specifically designed to facilitate the air-flow pattern of your Traulsen roll-in or roll-thru blast chiller. Accommodates twenty-six 12" x 20", thirteen 18" x 26" or twenty-six 14" x 18" pans.

Accessories for G-Series Models**Additional Shelf Kit**

Kit contains three epoxy coated shelves with twelve pins for easy installation

#1 Tray Slide Kit

Kit contains four pairs (enough for four pans) of #1 type tray slides. Standards and mounting hardware are also provided.

Universal Tray Slide Kit

Kit contains four pairs (enough for four pans) of universal tray slides. Standards and mounting hardware are also provided.

#4 Tray Slide Kit

Kit contains two pairs (enough to equip a full section) of #4 type tray slides. Standards and mounting hardware are also provided.

Leg Kit

Set of four 6" high adjustable legs.

Options for TS Series – Full Size Prep Table Models**Cutting Boards**

Choose your prep surface—composite wood or white vinyl. Both board materials are the highest quality, durable and easy to clean.

Shelf for Scale







Ideal when what you're putting together calls for more precise food measurement.

Top Shelf

It's the perfect place to keep spices and other non-refrigerated ingredients within easy reach.

Garnish Rack

Using our optional garnish rack, give your food that final touch without getting your work surface dirty.

EZ-CHANGE
TRAY SLIDES#1 TRAY SLIDES
STANDARDEZ-CHANGE
TRAY SLIDES#1 TRAY SLIDES
EZ-CHANGE#4 TRAY SLIDES
STANDARDUNIVERSAL TRAY SLIDES
EZ-CHANGEUNIVERSAL TRAY SLIDES
STANDARDHEAVY-DUTY
UNIVERSAL TRAY SLIDES
EZ-CHANGE

TRAY SLIDES

DESCRIPTION	SPACING			
#1 TRAY SLIDES – STANDARD				
16 ga. stainless steel angle type for bottom support of: (1) 18" x 26" Pan or (2) 14" x 18" Pans (For heated cabinets reduce available number of tray slides by 1 (full door and the upper section of a half-door))	2"	3"	4"	5"
Behind full height door – all models	28	19	14	11
Behind upper half height door – all models	13	9	7	5
Behind lower half height door – all models	13	9	7	5
Behind TU Series undercounter door	9	6	5	4
#1 Tray Slides – EZ-Change Interior	2"	4"		
Behind full height door – all models	26	13		
Behind half height door – all models	12	6		
#4 TRAY SLIDES – STANDARD				
Plated steel rod type for rim support of: (1) 18" x 26" Pan (One pair of #4 tray slides accommodates one half section) (For heated cabinets reduce available number of tray slides by 1 (full door and the upper section of a half-door))	1-½"			
Behind full height door – all models	38			
Behind upper half height door – all models	18			
Behind lower half height door – all models	18			
UNIVERSAL TRAY SLIDES – STANDARD				
16 ga. stainless steel angle type for bottom support of: (1) 18" x 26" Pan or (2) 14" x 18" Pans or (2) 12" x 20" Pans (For heated cabinets reduce available number of tray slides by 1 (full door and the upper section of a half-door))	4"	5"	6"	
Behind full height door – all models	14	11	9	
Behind upper half height door – all models	6	5	4	
Behind lower half height door – all models	7	5	4	
Behind TU Series undercounter door	5	4	3	
Universal Tray Slides – EZ-Change Interior* (For heated cabinets reduce available number of tray slides by 1 (full door and the upper section of a half-door))	2-¼"	4-½"		
Behind full height door – all models	22	11		
Behind half height door – all models	11	5		
Heavy-Duty Universal Tray Slides – EZ-Change Interior* (For heated cabinets reduce available number of tray slides by 1 (full door and the upper section of a half-door))	4-½"	9"		
Behind full height door – all models	11	5		
Behind half height door – all models	5	2		

SHELVES (SOME SHELVES ARE NOT AVAILABLE FOR HEATED CABINETS)

CAPACITY	STD.	MAX.
Behind full height door mounted on standard shelf pins	3	9
Behind half height door mounted on standard shelf pins	3	8
Behind full height door mounted on optional pilasters	3	13 (4" spacing)
Behind half height door mounted on optional pilasters	3	12 (4" spacing)
Behind TU Series undercounter door	2	3

NOTES:

- For all after market parts call Traulsen parts department 800-825-8220.
- All 26" deep models are available with shelves only, optional tray slides are not available.
- Deduct one tray slide per door from the above quantities for sliding glass door models.
- Please consult factory for special interior arrangements on "DUT" 24" and 48" wide models.
- Universal tray slides are not available for two and three section "N" width models supplied with LED lights.
- Tray slides are not available for one and two section "D-Width" models supplied with optional LED lights.
- EZ-Change Interior Universal Tray Slides max weight 75 lbs. EZ-Change Heavy-Duty Universal Tray Slides max weight 125 lbs.*
- All Tray Slides and Shelves are Factory Installed.
- Reduce tray slide quantity by 1 for 1 section Dual Temp

U.S. DOMESTIC WARRANTY (V. 100215)

For sales of Traulsen refrigeration equipment ("Equipment") within the United States, Traulsen warrants to the original purchaser of the Equipment ("Purchaser") that Traulsen will convey the Equipment free and clear of all liens, security interests, and encumbrances created by, through, or under Traulsen. Traulsen further warrants that for a period of three (3) years from the later of either (a) the date of delivery to the common carrier or (b) the date of installation (the "Domestic Warranty Period") but in no event, shall the Domestic Warranty Period commence later than 3 months from the date of delivery to the common carrier unless otherwise agreed upon by the parties in writing, under normal use and given proper installation and maintenance as determined by Traulsen, the Equipment: (a) will conform to the specifications as provided by Traulsen ("Specifications") and (b) will be free from substantial defects in material and workmanship.

The warranty period for compressors shall extend for an additional two (2) years beyond the Domestic Warranty Period. In the case of a nonconforming compressor, Traulsen shall provide a replacement compressor; however all installation, recharging, and repair costs shall be the responsibility of Purchaser. In the case of a nonconforming part, Purchaser must return the part to Traulsen within 30 days from the date of repair. Failure to return a claimed defective part to Traulsen within the 30 days will waive the right to the warranty claim.

Additionally, Traulsen provides a lifetime warranty on the housing of cam-lift hinges and the workflow handles. In the case of a non-conforming housing for cam-lift hinge or workflow handle, Traulsen shall provide a replacement part; however Purchaser shall be responsible for any other replacement costs, including but not limited to installation and labor.

The Domestic Warranty does not apply to: (a) consumable components or ordinary wear items; (b) components that are removable without the use of tools including but not limited to gaskets, shelf pins, and light bulbs; (c) use of the Equipment components or parts not supplied by Traulsen or specified by Traulsen in the Operator's Manual as set forth on Traulsen's website; or (d) damage resulting from fire, water, burglary, accident, abuse, misuse, transit, acts of God, terrorism, power surges, improper installation, or repairs or installation by unauthorized third parties.

For Traulsen units purchased for use with a condenser provided by a third-party, this standard warranty will apply only to those components contained within the unit to the point of connection of the refrigeration lines leading to the third-party condenser.

In the event of a breach of the warranties set forth above (the "Domestic Warranty"), Traulsen will, at Traulsen's option and as Purchaser's sole remedy, repair or replace, including labor costs, any nonconforming Equipment, provided that (a) during the Warranty Period Traulsen is promptly notified in writing upon discovery of the nonconformance with a detailed explanation of any alleged deficiencies; (b) Traulsen is given a reasonable opportunity to investigate all claims; and (c) Traulsen's examination of any alleged defective part confirms such alleged deficiencies and that the deficiencies were not caused by misuse, neglect, improper installation, unauthorized alteration or repair or improper testing. Traulsen reserves the right to, at its request, require Purchaser shall ship the alleged defective part to Traulsen for inspection and confirmation of defect. No Equipment may be returned without Traulsen's approval.

Purchaser is solely responsible for determining if Equipment is fit for a particular purpose and suitable for Purchaser's application. Accordingly and due to the nature and manner of Traulsen's Equipment, Traulsen is not responsible for the results or consequences of use, misuse, or application of its Equipment.

THIS DOMESTIC WARRANTY SETS FORTH THE EXTENT OF TRAULSEN'S LIABILITY FOR SALES WITHIN THE UNITED STATES. EXCEPT AS SET FORTH ABOVE, TRAULSEN MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, EXPRESS OR IMPLIED (INCLUDING NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE). IN NO EVENT WILL TRAULSEN'S LIABILITY IN CONNECTION WITH THE AGREEMENT OR SALE OF THE EQUIPMENT EXCEED THE PURCHASE PRICE OF THE EQUIPMENT AS TO WHICH THE CLAIM IS MADE. IN NO EVENT SHALL TRAULSEN BE LIABLE FOR ANY LOSS OF USE, LOSS OF PRODUCT, LOSS OF PROFIT, OR ANY OTHER INDIRECT, INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THIS WARRANTY EVEN IF TRAULSEN HAS BEEN NOTIFIED OF THE POSSIBILITY OF SUCH DAMAGES.

EXPORT WARRANTY (v. 100215)

For sales of Traulsen refrigeration equipment ("Equipment") outside of the United States, Traulsen warrants parts only, not labor to the original purchaser of the Equipment ("Purchaser") that Traulsen will convey the Equipment free and clear of all liens, security interests and encumbrances created by, through or under Traulsen. Traulsen further warrants that for a period of one (1) year from the date of delivery to the common carrier (the "Export Warranty Period") unless otherwise agreed upon by the parties in writing, under normal use and given proper installation and maintenance as determined by Traulsen, the Equipment: (a) will conform to the Specifications as provided by Traulsen; and (b) will be free from substantial defects in material and workmanship. It is the end user's responsibility to arrange for the export shipping.

The Export Warranty does not apply to: (a) consumable components or ordinary wear items; (b) components that are removable without the use of tools including but not limited to gaskets, shelf pins, and light bulbs; (c) use of the Equipment components or parts not supplied by Traulsen or specified in the Operator's Manual as set forth on Traulsen's website; or (d) damage resulting from fire, water, burglary, accident, abuse, misuse, transit, acts of God, terrorism, power surges, improper installation, or repairs or installation by unauthorized third parties.

For Traulsen units purchased with a condenser provided by a third-party other than Traulsen, this standard warranty will apply only to those components contained within the unit to the point of connection of the refrigeration lines leading to the third-party condenser.

In the event of a breach of the warranties set forth above (the "Export Warranty"), Traulsen will, at Traulsen's option and as Purchaser's sole remedy, repair or replace, but not including labor, freight, export costs, packaging costs, any nonconforming Equipment, provided that (a) during the Export Warranty Period Traulsen is promptly notified in writing upon discovery of such nonconformance with a detailed explanation of any alleged deficiencies; (b) Traulsen is given a reasonable opportunity to investigate all claims; and (c) Traulsen's examination of such piece of Equipment defective part confirms the alleged nonconformity and that the nonconformities were not caused by misuse, neglect, improper installation, unauthorized alteration or repair or improper testing. Traulsen reserves the right to, at its request, require Purchaser shall ship the alleged defective part to Traulsen for inspection and confirmation of defect. No Equipment may be returned without Traulsen's approval.

Purchaser is solely responsible for determining if Equipment is fit for a particular purpose and suitable for Purchaser's application. Accordingly and due to the nature and manner of Traulsen's Equipment, Traulsen is not responsible for the results or consequences of use, misuse, or application of its Equipment.

THIS EXPORT WARRANTY SETS FORTH THE EXTENT OF TRAULSEN'S LIABILITY FOR SALES OUTSIDE THE UNITED STATES. EXCEPT AS SET FORTH ABOVE, TRAULSEN MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, EXPRESS OR IMPLIED (INCLUDING NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE). IN NO EVENT WILL TRAULSEN'S LIABILITY IN CONNECTION WITH THE AGREEMENT OR SALE OF THE EQUIPMENT EXCEED THE PURCHASE PRICE OF THE EQUIPMENT AS TO WHICH THE CLAIM IS MADE. IN NO EVENT SHALL TRAULSEN BE LIABLE FOR ANY LOSS OF USE, LOSS OF PRODUCT, LOSS OF PROFIT, OR ANY OTHER INDIRECT, INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THIS WARRANTY EVEN IF TRAULSEN HAS BEEN NOTIFIED OF THE POSSIBILITY OF SUCH DAMAGES.

Listed by ETL, Certified by NSF

**HS6****HS7****HS8****HS9**

PERFORMANCE

- Increased yield and slice quality with **13" CleanCut™** knife with cobalt edge
- Slice cheese and meats with a ½ HP motor
- Control slice speed with the variable speed automatic carriage (HS7 & HS9 models)

SANITATION & CLEANING

- **Removable knife tool** allows for thorough and complete machine cleaning (optional)
- **Removable knife guard cover and ring guard**
- **Tilting, removable carriage** provides complete access for deep cleaning

- Sanitary one-piece base means no cracks or crevices for bacteria to hide
- Removable meat-grip assembly
- Top mounted sharpener with Borazon™ stones – single action sharpening in 15 seconds



OPERATOR ASSURANCE

- **Zero knife exposure during cleaning and sharpening**
- Gauge plate interlock
- No volt release
- Home-to-start (HS7 model only)
- Home-to-start, close-to-stop and automatic 30-second shut off (HS8 & HS9 models only)

MODEL NO.	HS6/HS6N	HS7/HS7N	HS8/HS8N	HS9/HS9N
Carriage Capacity	12" in width or 7.5" diameter			
Type of Operation	45° Positive Angle-Feed Manual	45° Positive Angle-Feed Automatic 4 Speeds 3 Stroke Lengths	45° Positive Angle-Feed Manual	45° Positive Angle-Feed Automatic 4 Speeds 3 Stroke Lengths
Knife Size	13"	13"	13"	13"
Knife Motor	½ H.P.	½ H.P.	½ H.P.	½ H.P.
Slice Thickness	Up to 1"	Up to 1"	Up to 1"	Up to 1"
Shipping Weight Approximate	126 lbs.	138 lbs.	130 lbs.	142 lbs.
	Heavy duty design for years of high precision slicing. All models include exclusive tilt and removable tray design, top mounted sharpener.	Automatic with reliable belt drive, low profile, high volume slicing. Three stroke lengths and four speeds available.	Heavy duty design for years of high precision slicing. Includes six interlocks and anodized surface.	Automatic with reliable belt drive, low profile, high volume slicing. Three stroke lengths and four speeds available.

"N" models are non-removable knife.

MODEL NO.	MANUAL		AUTOMATIC	
	HS6/HS6N*	HS8/HS8N*	HS7/HS7N*	HS9/HS9N*
KNIFE				
13" CleanCut™ Knife	•	•	•	•
Removable Ring-Guard Cover	•	•	•	•
Zero Knife Exposure	•	•	•	•
Heavy-Gauge Stainless Steel Knife Cover	•	•	•	•
Top-Mounted Borazon Stone Sharpener	•	•	•	•
OPERATION				
1/2 H.P. Knife Drive Motor	•	•	•	•
Automatic Drive System			•	•
Variable Four-Speed Automatic Carriage with Front-Mounted Controls			•	•
Three Custom Stroke Lengths			•	•
ADDITIONAL FEATURES				
Home-Start Position		•	•	•
Close-To-Stop		•		•
Gauge Plate Interlock		•		•
Carriage System Interlock		•		•
No-Volt Release	•	•	•	•
30-Second Shutoff		•		•
HOUSING AND BASE				
Sanitary Anodized Aluminum Base		•		•
Sanitary Burnished Aluminum Base	•		•	
Machined Grooves on Gauge Plate and Knife Cover	•	•	•	•
Exclusive Tilting, Removable Carriage System	•	•	•	•
Electroless Nickel-Plated Single Slide Rod with Reservoir Wick	•	•	•	•
Precision-Driven Indexing Cam	•	•	•	•
Ergonomic-Style Handle	•	•	•	•
Rear-Mounted, Removable Meat-Grip Arm	•	•	•	•
Lift Assist Cleaning Leg			•	•
Cleaning Leg	•	•		

*Non-removable knife feature available on HS6N, HS7N, HS8N and HS9N models.

HS SERIES ACCESSORIES

HS-CHUTE
Tubular Chute



HS-FENFUL
Full Fence



**HS-LEGSET or
HSAUTO-LEGSET**
4.5" Legs



HS-DEF
Product Deflector Kit



HS-HVYGRP
Heavy Duty Meat Grip



CUTTER-TABLE3
Equipment Stand
(1 Shelf)



CUTTER-TABLE4
Equipment Stand
(2 Shelf)

MEDIUM DUTY EDGE12, EDGE13, EDGE13A

Listed by ETL, Certified by NSF

STANDARD FEATURES

- EDGE12 – 12" diameter chrome plated carbon steel knife
- EDGE13 & EDGE13A – 13" diameter chrome plated carbon steel knife
- ½ H.P. knife drive motor
- Interlocks:
 - Carriage interlock (EDGE13 & EDGE13A models only)
 - Gauge plate interlock (EDGE13 & EDGE13A models only)
 - No volt release
- Single speed automatic carriage (EDGE13A model only)
- Hobart poly-V belt drive system
- Top mounted sharpener with ceramic stone lets you sharpen and hone in one step
- Removable rear mounted meat grip and slide rod
- Permanently mounted ring guard
- Smooth, one piece anodized aluminum base with rounded surfaces
- Anodized aluminum removable carriage and knife cover
- Removable product deflector
- 6' cord and plug

MODEL NO.	EDGE12	EDGE13	EDGE13A
Motor	½ H.P.	½ H.P.	½ H.P.
Electrical	120/60/1	120/60/1	120/60/1
Carriage Capacity	10" wide by 6" high or 8" diameter	9½" wide x 7" high or 8½" diameter	9½" wide x 7" high or 8½" diameter
Type of Operation	Manual	Manual	Automatic
Slice Thickness	⅛"	⅛"	⅛"
Finish	Anodized Aluminum	Anodized Aluminum	Anodized Aluminum
Shipping Weight Approximate	85 lbs.	89 lbs.	123 lbs.



EDGE12



EDGE13



EDGE13A

SALAD DRYERS

SDPE & SPDS

Listed by UL, Certified by NSF

STANDARD FEATURES

- ¼ H.P. motor with thermal overload
- Permanently lubricated gear drive
- Five minute timer simplifies operation
- Easy load spin basket with convenient handles
- Drain pipe extension drains directly into floor drain or catch pan
- 7' cord and plug
- Dries up to a case of lettuce, 16 heads, in minutes



SDPE



SPDS

MODEL NO.	SDPE	SPDS
Motor	¼ H.P.	¼ H.P.
Spin Speed	406 RPM	406 RPM
Outer Tub & Lid	Polyethylene	Stainless Steel
Overall Dimensions Width x Depth x Height	24½" x 23" x 31⅝"	24½" x 23" x 31⅝"
Electrical Specs	120/60/1, 220/60/1	120/60/1, 220/60/1
Shipping Weight	88 lbs.	113 lbs.

Listed by ETL

STANDARD FEATURES

- Two heavy duty motors, one for the bowl and one for the dough hook
- Manual & automatic control functions
- Two 20 minute programmable timers
- Bowl reverse
- Bowl jog control
- Two fixed speeds
- Heavy duty stainless steel breaker bar
- Stainless steel bowl guard
- Heavy duty stainless steel spiral dough hook
- Mounted on casters for easy mobility

MODEL NO.	HSL180	HSL220	HSL300	HSL350	HSU440
Capacity of Bowl	150 qts.	170 qts.	228 qts.	288 qts.	314 qts.
Motors					
Two-Speed Spiral Arm	3.3/6.0 HP	3.3/6.0 HP	4.0/7.0 HP	5.0/8.0 HP	6.1/10.6 HP
Bowl	.75 H.P.	.75 H.P.	.75 H.P.	1.0 H.P.	1.0 H.P.
Electrical	208/60/3 – 34 Amps	208/60/3 – 34 Amps	208/60/3 – 34 Amps	208/60/3 – 42 Amps	208/60/3 – 42 Amps
Shipping Weight	1,215 lbs.	1,215 lbs.	1,365 lbs.	1,875 lbs.	1,920 lbs.
Net Weight	1,125 lbs.	1,125 lbs.	1,280 lbs.	1,740 lbs.	1,785 lbs.



HSL180

Listed by UL, Certified by NSF

STANDARD FEATURES

- 5 H.P. motor
- 45-quart capacity stainless steel bowl with pouring lip
- Durable steel base with powder coated finish
- Electromechanical interlocks
- Magnetically operated start/stop push button switches
- 5-minute timer with "Hold" & "Jog" settings
- Counterbalanced clear Lexan bowl cover with stainless steel support bar
- Bowl tilt lever
- Stainless steel mixing baffle with pour-through center shaft
- 2 blade cut/mix knife
- Knead/mix attachment
- Polypropylene strainer basket
- 6' power cable, plug and receptacle

MODEL NO.	HCM450
Capacity	45 Qts.
Motor	5 H.P.
Electrical	200/60/3, 230/60/3, 460/60/3 Thermal motor overload protection as standard
Standard Equipment	5 Minute Timer, Cut/Mix Attachment, Knead/Mix Attachment, Strainer Basket, Mixing Baffle & Cover Scraper
Optional Accessories	Castors, 2-Blade Cut/Mix Attachment, Knead/Mix Attachment*
Shipping Weight/Net Weight	340 lbs./260 lbs.

*Available thru Service Parts No. 292029



HCM450

Listed by UL, Certified by NSF



MODEL NO.	HL120	HL200	HL300	HL400
Capacity of Bowl (liquid) Standard Equipment	12 qts.	20 qts.	30 qts.	40 qts.
Capacity of Step Down Bowls (Purchased as extra equipment)	—	12 qts.	20 qts.	20 and 30 qts.
Speeds	3 Fixed plus Soft Start and Stir	3 Fixed plus Soft Start and Stir	3 Fixed plus Soft Start and Stir	3 Fixed plus Soft Start and Stir
Timer Controlled	Standard	Standard	Standard	Standard
Motor	½ H.P.	½ H.P.	¾ H.P.	1½ H.P.

CONSISTENT MIXING PERFORMANCE

- Gear transmission with variable frequency drive system
- The power needed to consistently mix batch after batch
- Shift-on-the-fly™ technology

SANITATION & CLEANING

- Stainless steel removable bowl guard
- Open base
- Electrostatic powder coat paint finish



EASE OF USE

- SmartTimer™ with last batch recall
- Swing-out-bowl with single point bowl installation
- #12 taper attachment hub (HL120, HL200, HL300 & HL400, HL600 & HL662 models only)
- Power bowl lift (HL600, HL662, HL800 & HL1400 models only)
- Easy-to-reach controls

TABLE TOP N50

Listed by UL, Certified by NSF



STANDARD FEATURES

- 5 quart capacity
- ½ H.P. Hobart designed motor
- 3 variable frequency drive gear transmission
- Three fixed speeds
- Large, easy-to-reach controls
- #10 taper attachment hub
- Manual bowl lift
- Cord and plug
- Bowl, beater, whip and dough hook included



MODEL NO.	HL600	HL662	HL800	HL1400
Capacity of Bowl (liquid) Standard Equipment	60 qts.	60 qts.	80 qts.	140 qts.
Capacity of Step Down Bowls (Purchased as extra equipment)	40 qts.	40 qts.	40 and 60 qts.	40, 60 and 80 qts.
Speeds	4 Fixed plus Soft Start and Stir	2 Fixed	4 Fixed plus Soft Start and Stir	4 Fixed plus Soft Start and Stir
Timer Controlled	Standard	Standard	Standard	Standard
Motor	2.7 H.P.	2.7 H.P.	3 H.P.	5 H.P.

OPTIONAL ATTACHMENTS AND ACCESSORIES LEGACY® SERIES

9" VEGETABLE SLICER



Available with adjustable slicer plate, grater plate and $\frac{3}{32}$ ", $\frac{3}{16}$ ", $\frac{1}{8}$ ", and $\frac{1}{2}$ " shredder plates. Burnished aluminum finish.

CHOPPING END



Standard equipment includes round, stainless steel feed pan, plastic stomper, knife and plate ($\frac{1}{8}$ " diameter holes). Other plate sizes available.

ATTACHMENT TRAY SUPPORT



The Hobart Attachment Tray Support is an innovative solution to increase productivity. The tray is designed to aid in the use of the vegetable slicer. It is available for use with the HL120 and HL200 (A120, A200).

BOWL SCRAPER



To increase productivity, improve sanitation and product quality, the Hobart bowl scraper is an innovative solution. Available as an accessory or an upgrade for existing Hobart mixers. For primary and secondary size bowls.

POWER DRIVE UNIT



Listed by UL, Certified by NSF

Designed for use with the 9" Vegetable slicer. Provides maximum power and efficiency where high volume is desired.

Model PD-35 – 350 RPM, $\frac{1}{2}$ H.P., 115/60/1
Model PD-70 – 700 RPM, $\frac{1}{2}$ H.P., 115/60/1



MODEL NO.	BOWL CAPACITY (QTS.)	"B" FLAT BEATER	"C" WING WHIP	"D" WIRE WHIP STAINLESS STEEL WIRES	"ED" DOUGH HOOK	"P" PASTRY KNIFE
		ALUMINUM				
HL120	12	•	•	•	•	•
HL200	20	•	•	•	•	•
	12	•	•	•	•	•
HL300	30	•	•	•	•	•
	20	•	•	•	•	•
HL400	40	•	•	•	•	•
	30	•	•	•	•	•
	20	•	•	•	•	•
HL600	60	•	•	•	•	•
HL662	40	•	•	•	•	•
HL800	80	•	•	•	•	•
	60	•	•	•	•	•
	40	•	•	•	•	•
HL1400	140	•	•	•	•	•
	80	•	•	•	•	•
	60	•	•	•	•	•
	40	•	•	•	•	•




MODEL NO.	BOWL CAPACITY (QTS.)	"B" FLAT BEATER		"D" WIRE WHIP STAINLESS STEEL WIRES	"ED" DOUGH HOOK
		ALUMINUM	STAINLESS STEEL		
N50	5	•	•	• (All S/S)	•
A120	12			•	
A200	20	•		•	•
	12	•		•	
D300	30	•		•	•
D340	40	•		•	•
	20	•			
H600 P660	60	•		•	•
	40	•		•	
	30			•	
M802	80	•		•	•
	60†	•		•	•
	40*	•		•	
	30*			•	
V1401	140	•		•	•
	80‡	•		•	•
	60†	•		•	•
	40*	•		•	
	30*			•	

* 40-30 quart bowl adapter with 80 quart bowl adapter necessary for use of this equipment.

† 60 quart bowl adapter is necessary for use of this equipment.

‡ 80 quart bowl adapter is necessary for use of this equipment.



MODEL NO.	BOWL CAPACITY (QTS.)	"I" WIRE WHIP HEAVY DUTY	BOWL SCRAPER	SPLASHCOVER LEXAN	BOWL EXTENDER RING STAINLESS STEEL	BOWL TRUCK BURNISHED ALUMINUM	INGREDIENT CHUTE
HL120	12		•	•			•
HL200	20		•	•			•
	12		•	•			•
HL300	30	•	•	•		•	•
	20			•			Use 30 qt.
	40	•	•	•		•	•
HL400	30	•	•	•		•	Use 40 qt.
	20			•			Use 40 qt.
HL600	60	•	•	•	•	•	•
HL662	40	•	•	•			
	80	•	•	•	•	•	•
HL800	60	•	•	•	•	•	•
	40	•	•	•		•	
	140	•	•	•		•	•
	80	•	•	•	•	•	•
HL1400	60	•	•	•	•	•	•
	40	•	•	•		•	



MODEL NO.	BOWL CAPACITY (QTS.)	BOWL STAINLESS STEEL	SPLASH COVER LEXAN	BOWL EXTENDER RING STAINLESS STEEL	BOWL TRUCK BURNISHED ALUMINUM
N50	5	•			
A120	12			•	
A200	20	•	•	•	
	12		•	•	
D300	30	•	•	•	
	20		•	•	
	40	•	•		
D340	30	•		•	
	20	•		•	
H600	60	•	•	•	•
P660	40	•	•		
	30		•		
	80	•	•	•	•
M802	60†	•	•	•	•
	40*	•	•		
	30*		•		
	140	•	•		•
	80‡	•	•	•	•
V1401	60†	•	•	•	•
	40*	•	•		
	30*		•		

CONTINUOUS FEED FP100, FP150, FP250, FP350 & FP400i

Listed by UL, Certified by NSF

FP100, FP150, FP250, FP350 STANDARD FEATURES

- Compact design
- Angled front
- Planetary gear transmission
- Triple interlock system
- High quality stainless steel cutting plates
- Anodized aluminum housing
- Plate speed of 420 rpm (FP100 & FP150)
- Plate speed of 420 rpm (FP250 & FP350)
- 8' cord & plug (120/60/1)
- Decoring screw (FP150, FP250 & FP350)

FP400i STANDARD FEATURES

- 208-240/60/3
- Gear transmission
- Stainless steel housing, hopper, and accessories
- 5,280 lbs. per hour production capability
- High quality stainless steel cutting plates
- Two-speed 2 H.P. motor
- Triple interlock system
- Two stationary front legs and two rear legs with casters
- 6' power cord
- Full hopper size



MODEL NO.	FP100	FP150	FP250	FP350	FP400i
Motor H.P.	1/3 H.P. 420 RPM	1/2 H.P. 420 RPM	3/4 H.P. 420 RPM	1 H.P. 420 RPM	2 H.P. 200/400 RPM
Electrical Amps	120/60/1 3.5 Amps/6 ft. Cord	120/60/1 4.8 Amps/6 Ft. Cord	120/60/1 8 Amps/6 ft. Cord	120/60/1 10 Amps/6 ft. Cord	208-240/60/3 7.5 Amps/6 ft. Cord
Overall Dimensions W x D x H	8 ¹³ / ₁₆ " x 16 ¹¹ / ₁₆ " x 19 ¹ / ₂ "	8 ³ / ₄ " x 18 ⁵ / ₈ " x 20 ³ / ₄ "	9 ¹³ / ₁₆ " x 17 ³ / ₄ " x 23 ³ / ₈ "	13 ⁷ / ₁₆ " x 21 ⁷ / ₈ " x 29 ⁵ / ₁₆ "	22 ³ / ₄ " x 27 ³ / ₄ " x 47 ¹ / ₂ "
Net Weight/ Shipping Weight	39 lbs. 46 lbs.	39 lbs. 46 lbs.	45 lbs. 51 lbs.	71 lbs. 77 lbs.	139 lbs. 145 lbs.
3-Pack Blades	1/16", 5/32" Slicer Plates; 5/32" Shredder Plate – 1 Wall Rack				
6-Pack Blades	Above plus 3/8", 7/32" Slicer Plates; 3/8" Dicer Plate - 2 Wall Racks				
9-Pack Blades	N/A	N/A	N/A	Above plus 5/64" Julienne, 5/32" Julienne, 5/16" Shredder Plate - 3 Wall Racks	

BOWL STYLE FP41, HCM61, HCM62

Listed by UL, Certified by NSF

STANDARD FEATURES

- Stainless steel bowl with see through cover
- Direct drive motor
- Triple interlock system
- Bowl-scraper
- Compact design
- Anodized aluminum base with powder coated top cover
- COOLCUTTER™ Knives (6 qt.)
- 8' cord and plug



MODEL NO.	FP41	HCM61	HCM62
H.P./RPM	¾ H.P./1725 RPM	1½ H.P./1725 RPM	2 H.P./1725/3450 RPM
Electrical Amps	120/60/1 8.0	120/60/1 15.4	208-240/60/3 6.0/5.0
Capacity	4 Qt.	6 Qt.	6 Qt.
Overall Dimensions W x D x H	10¼" x 11½" x 17¼"	12" x 13½" x 18½"	12" x 13½" x 18½"
Speeds	ON-OFF-PULSE	ON-OFF-PULSE	LOW-HIGH-OFF-PULSE

COMBINATION STYLE HCC34

Listed by UL, Certified by NSF

STANDARD FEATURES

- Compact design
- 1½ HP motor
- Four speeds with SmartSense™ control
- 6' cord & plug
- Aluminum base

BOWL PROCESSOR

- 3.2 qt. stainless steel bowl
- Knife speed of 1,450/2,650 rpm
- Bowl wiper system
- Sealed bowl/cover interface
- Chop, mix, grind, puree, blend, mince bowl processing operations

VEGETABLE PREPARATION PROCESSOR

- Stainless steel processor plates
- Plate speeds of 500/800 rpm
- 4.4 lbs./minute capacity
- Double interlock system
- Half moon hopper with continuous feed tube
- Slice, crimp, julienne, shred, grate and dice processing operations



HCC34
Continuous Feed Configuration

HCC34
Bowl Style Configuration

MODEL NO.	HCC34
H.P.	1½ H.P.
Electrical Amps	120/60/1 9.0
Capacity	
Continuous Feed	4.4 lbs./Minute
Bowl Style	3.2 Qt.
Overall Dimensions	
Continuous Feed – W x D x H	11" x 13¾" x 23"
Bowl Style – W x D x H	11" x 13" x 17"
Speeds	4

Listed by UL, Certified by NSF



6115



6430

6115 STANDARD FEATURES

- 1/3 H.P. motor
- Synchronous 5 minute timer – adjustable for any increments from 1/2 minute up to 5 minutes
- For any round shaped hard rooted vegetable
- Cord and plug (115/60/1)
- Double V-belt drive
- Constructed of seam-welded stainless steel
- Silicon carbide abrasive disk easily removes for cleaning
- Removable Lexan liner
- Heavy-duty hopper cover

6430/6460 STANDARD FEATURES

- 3/4 H.P. motor (model 6430)
- 1 H.P. motor (model 6460)
- Peels from 30 to 60 pounds of potatoes in three minutes
- V-belt direct speed drive
- For any round shaped hard rooted vegetable
- Stainless steel construction
- Removable Lexan liner
- Silicon carbide abrasive disc easily removes for cleaning
- Synchronous 5 minute timer (single phase only)
- Heavy duty hopper cover

MODEL NO.	6115	6430	6460
Motor Ball Bearing	1/3 H.P.	3/4 H.P.	1 H.P.
Potatoes Correct Size Batch Time to Peel Batch	15-20 lbs. 1-3 Minutes	30-33 lbs. 1-3 Minutes	50-60 lbs. 1-3 Minutes
Carrots Correct Size Batch Time to Peel Batch	8-12 lbs. 1-3 Minutes	15-25 lbs. 1-3 Minutes	
Beets Correct Size Batch Time to Peel Batch	10-15 lbs. 30 Seconds to 1 Minute	15-25 lbs. 30 Seconds to 1 Minute	
Shipping Weight Approximate	74 lbs. (Peeler) 43 lbs. (Peeler Trap)	147 lbs. (Peeler) 65 lbs. (Base)	156 lbs. (Peeler) 70 lbs. (Base)

Listed by UL, Certified by NSF



84145



84186

STANDARD FEATURES

- One-piece burnished aluminum housing
- 1725 rpm knife rotation
- Bowl cover interlock
- Double cutlery grade stainless steel knives
- Pull/Push on/off switch
- 3" stainless steel legs with rubber feet
- 6' cord and plug (115/60/1)

MODEL NO.	84145	84186
Motor	½ H.P.	1 H.P.
Bowl Size (I.D.)	14"	18"
Height	15⅝"	17½"
Width	31⅞"	33¾"
Depth	18¾"	22½"
Bowl Rotating Speed	22	20
Attachment Hub Speed	209 RPM	256 RPM
Electrical Specs	208/60/3, 460/60/3	115/60/1, 230/60/1, 208/60/3, 460/60/3
Shipping Weight	140 lbs.	185 lbs.

EQUIPMENT STANDS

ACCESSORY TABLES

Certified by NSF

CUTTER-TABLE3
Equipment Stand (1 Shelf)

Hobart accessory tables are specifically designed for use with Hobart Food Cutters. Heavy gauge stainless steel tops and shelves. Chrome plated legs and leveling feet. Optional heavy duty casters available (adds 6" to table height).

MODEL NO.	CUTTER-TABLE3	CUTTER-TABLE4
For Use With	14" or 18" Food Cutters	
No. of Shelves	one	two
Table Surface (Inches)	32 x 27	32 x 27
Table Height (Inches)	31⅞	31⅞
Shipping Weight	80 lbs.	110 lbs.

MEAT TENDERIZER

403

Listed by UL, Certified by NSF



403

STANDARD FEATURES

- ½ H.P. motor
- Safety interlock on translucent guard and motor housing
- Integral chute keeps hands at a safe distance from tenderizing knives
- 6' cord and plug
- Blades and shafts are made of heavy duty stainless steel
- Designed for quick and easy cleaning
- Variety of knit knives

Listed by UL, Certified by NSF

4812/4822 STANDARD FEATURES

- All parts which contact food are easily accessible and readily removable for cleaning without the use of tools
- 6' cord and plug
- **4812**
 - ½ H.P. motor
 - 8-10 pounds per minute
- **4822**
 - 1½ H.P. motor
 - 12-20 pounds per minute



4812/4822

4732/4732A STANDARD FEATURES

- 3 H.P. motor
- Oil bath transmission
- 14 gauge stainless steel pan
- 151 rpm worm speed
- **Capacities:**
 - 35 to 40 pounds of fresh beef per minute, first cutting, through a ⅜" plate
 - 25 to 30 pounds of fresh beef per minute, second cutting, through a ⅜" plate



4732/4732A

MODEL NO:	4812	4822	4732	4732A
Chopping End Size	#12	#22	#32	
Motor – Universal AC Constant Speed	½ H.P.	1½ H.P.	3 H.P.	
Electrical Specifications	120/60/1, 230/50/1, 240/60/1	120/60/1, 230/50/1, 240/60/1, 208-240/60/3, 480/60/3	200/60/1, 200/60/3, 208/60/3, 230/60/1, 230/60/3, 380/50/3	230/60/1, 200/60/3
Capacity – lbs. per min. (beef) First grind thru ⅜" plate	8 lbs.	16 lbs.	35 to 40 lbs.	
Overall Dimensions (Height x Width x Depth)	23¾ x 12⅜ x 29⅞	23¾ x 12⅜ x 29⅞	26⅞ x 23½ x 46⅞	
Chop End	Straight throat. Tinned cast iron cylinder, auger & adjusting ring.	Straight or Funnel Shaped (FS) throat. Tinned cast iron cylinder, auger & adjusting ring	Straight throat (rectangular opening). Tinned cast iron cylinder & auger. SST adjusting ring.	
Pan	Removable stainless steel. No guard. No interlocks.	Removable stainless steel, no guard for straight throat C/E. Removable stainless steel with guard for FS C/E. No interlocks.	Stainless steel. Fixed to machine (clean in place). No interlocks.	Stainless steel. Interlocked pan removable for sink cleaning.
Net Weight/Shipping Weight	118 lbs./144 lbs.	182 lbs./207 lbs.	307 lbs./320 lbs.	
	Stainless steel housing, legs, and trim. Stay Sharp knife. Carbon steel plate (⅜" holes). Plastic stomper.		Housing finish: painted carbon steel or stainless steel. Legs: 5" stainless steel, 18" chrome plated, or 21" chrome plated. Knives and plates are available as accessories. Plastic stomper. Stainless steel deflector on adjusting ring. Stainless steel cylinder wrench included. Larger choppers are also available up to 5 H.P.	

Listed by UL, Certified by NSF

STANDARD FEATURES

- 3 H.P. water-resistant motor
- Center-crown, dual-flange pulleys
- Open-frame, stainless steel construction, glass beaded finish
- Stainless steel column, glass beaded finish
- Durable heavy gauge construction
 - 6 stainless steel roller bearings with tri-rail carriage
- Direct gear drive transmission
- Split rear table
- Pivoted automatic tension
- Adjustable legs

MODEL NO.	6614 Saw	6801 Vertical Saw
Cutting Clearance H x W	15½" x 12"	17½" x 15¾"
Cutting Table	18¾" x 34½"	21½" x 39⅝"
Motor	3 H.P.	3 H.P.
Carriage	14" D x 19¾" W	16" D x 24¾" W
Blade Length	126"	142"
Shipping Weight	550 lbs.	555 lbs.



6614



6801

Listed by UL, Certified by NSF



4146

STANDARD FEATURES

- 5 H.P. grind motor, 1 H.P. mix motor
- Exclusive wedge cylinder ensures full rate feeding for entire batch
- Interlock on hopper lid
- Hopper lid easily converts for right or left side loading
- Depending on the type of product:
 - 4246 Capacity 140 pounds
- Knives and plates not included

MODEL NO.	4146
Chopping End Size	#46
Motor – Hobart-Designed Ball Bearing	5 H.P.
Electrical Specifications	200/60/3, 230/60/3, 380/50/3
Capacity – Lbs. per min. (beef) First Grind thru ⅝" plate	60-65 lbs.
Overall Dimensions Height x Width x Depth	47⅞" x 26⅞" x 59⅞"
Net Weight/Shipping Weight	372 lbs./412 lbs.
Stainless steel or tinned feed pans available. Legs to convert to floor model. Stainless steel or painted housing available.	

Listed by UL, Certified by NSF



MG1532



MG2032

STANDARD FEATURES

- 7.5 H.P. grind motor, 1 H.P. mix motor
- Pneumatic foot control
- Exclusive wedge cylinder ensures full rate feeding for entire batch
- Easy access hopper interior and exterior surfaces for easy clean-up
- Counter balanced lid with interlock
- Depending on the type of product:
 - MG1532 Capacity 150 pounds
 - MG2032 Capacity 200 Pounds
- Knives and plates not included

Options:

- Side feed inlet is available for tandem machine operation

MODEL NO.	MG1532	MG2032
Electrical Specifications	208/60/3, 480/60/3	200-220/50/3, 208/60/3, 480/60/3
Rated Amps	208/60/3 – 30 Amps 480/60/3 – 15 Amps	200-220/50/3, 208/60/3 - 30 Amps, 480/60/3 - 15 Amps
Finish	Glass bead finished stainless steel hopper, stainless steel panels, stainless steel chop cylinder and adjusting ring. Tinned cast iron auger. Tinned carbon steel mix arm.	

MIXER-GRINDER

4246

Listed by UL, Certified by NSF

STANDARD FEATURES

- 5 H.P. grind motor, 1 H.P. mix motor
- Exclusive wedge cylinder ensures full rate feeding for entire batch
- Interlock on hopper lid
- Hopper lid easily converts for right or left side loading
- Depending on the type of product:
 - 4246 Capacity 140 pounds
- Knives and plates not included



4246

FAT PERCENTAGE MEASURING KIT

F101



F101

Measures the fat percentage in ground beef from 10% to 40%. Completely portable, helps ensure quality standards wherever meat is processed. Designed for quick and easy operation with added emphasis on sanitation. Complete instructions are included.

STANDARD EQUIPMENT

- 2 funnels
- 3 precision test tubes
- 2 screens
- 2 cleaning brushes
- Cord and plug

Contained in a carrying case. Electrical 115/60/1, 230/60/1 (230/60/1, not submitted for UL Listing). Power controlled by bell gong indicating timer.

Listed for safety and sanitation by UL



OV500E1/OV500G1-EE



Gas Models Only



OV500E2/OV500G2-EE

STANDARD FEATURES

- ENERGY STAR® certified
- 10 year parts & labor warranty on heat exchanger tubes (gas models only)
- Easy-to-use digital controls: set temperature, time, steam, fan delay and vent in up to 4 steps or stages; store a maximum of 99 recipes
- Heavy duty rack lift includes high-temp bearings and slip clutch soft start rotation system
- Stainless steel interior and exterior construction
- Long-lasting halogen lighting in the oven chamber
- Three pane viewing window reduces heat transfer out of the oven and is easily cleaned for visibility into the bake chamber
- Flush floor provides easy access – no ramp required
- Field reversible bake chamber door
- Integral, curved hood is fully fire-sealed for Type I or Type II installations and is listed to UL 710 standards
- Patented, self-contained cast spherical steam system
- Built-in rollers and levelers for ease of installation
- Stainless steel B style rack lift
- Oven racks sold separately

MODEL NO.	OV500G1-EE	OV500E1	OV500G2-EE	OV500E2
Footprint Dimensions Width x Depth x Height	55.0" x 51.0" x 104.5"	55.0" x 51.0" x 104.5"	72.0" x 62.0" x 104.5"	72.0" x 62.0" x 104.5"
Swing Diameter/Capacity	34.5"D/1 Single Rack		49.9"D/2 Single Racks or 1 Double Rack	
Heating System	Gas	Electric	Gas	Electric
Ventilation	Single Point Connection 8" Connection Collar		Single Point Connection 10" Connection Collar	
Gas BTU's	180,000 BTU/hr.	N/A	275,000 BTU/hr.	N/A
Water Connection	½" @ 94.0" AFF	½" @ 94.0" AFF	½" @ 94.0" AFF	½" @ 94.0" AFF
Drain Connection	2 Drains - Choose 1, Plug the Other Rear: ½" NPTM @ 7.0" AFF Front: ½" NPTM @ 6.5" AFF		2 Drains - Choose 1, Plug the Other Rear: ½" NPTM @ 6.3" AFF Front: ½" NPTM @ 6.1" AFF	
Minimum Ceiling Height	120"	120"	120"	120"
Shipping Weight	2,995 lbs.	2,905 lbs.	3,820 lbs.	4,035 lbs.

Listed for safety and sanitation by UL



Mini-rack oven shown on 12-pan stand base



Mini-rack oven shown on proofer base

STANDARD FEATURES

- Stainless steel interior and exterior construction
- 10 year parts & labor warranty on heat exchanger tubes (gas models only)
- Loading doors with positive latching closure operate independently
- Dual pane viewing windows open for easy cleaning between the panes
- Easy-to-use digital control: set temperature, time, steam, fan delay and vent in multiple steps; store recipes for up to 99 different products
- Air velocity, direction of air flow and the rotating interior rack provide the proper atmosphere to give consistent results
- Patented, self-contained cast spherical steam system
- Interior rack is easily removable for cleaning or routine maintenance; patented removable bottom provides easy access to the oven's floor for quick clean-up
- One interior rack is included with the oven; additional are sold separately
- Proofer and stand base units available to meet your application demands; units sold separately

MODEL NO.	OVENS		BASES	
	OV310G	OV310E	Stand Base	MB300 Proofer Base
Overall Dimensions Width x Depth x Height	48.0" x 38.0" x 48.0"	48.0" x 38.0" x 48.0"	48.0" x 36.0" x 27.0"	48.0" x 36.0" x 34.0"
Capacity	6, 8 or 12 Pan Capacity - 18" x 26" Pans		12 Pan Capacity - 18" x 26" Pans	16 Pan Capacity - 18" x 26" Pans
Heating System	Gas	Electric	N/A	Electric
Ventilation	May Need to be Installed Under a Type 1 or Type 2 Hood - Consult Local Codes		N/A	N/A
Gas BTU's (¾")	95,000 BTU/hr.	N/A	N/A	N/A
Water Connection	½" Rear	½" Rear	N/A	¾" Rear
Drain Connection	Route ½" Rear Drain to Air-Gap Drain		N/A	½" Rear Drain
Shipping Weight	785 lbs.	730 lbs.	138 lbs.	363 lbs.

Listed for safety and sanitation by UL



BV400G

STANDARD FEATURES

- Oven Capacity:
 - Forty 3# chickens
 - Ten standard 18" x 26" pans
 - Five 12" x 20" x 2.5" steam pans
- Programmable touch-screen controls with USB port
- Loading door with heavy-duty, hold-open hinges
- Easy-to-clean, large window with two panes for easy viewing
- Rotating interior oven rack provides even cooking results
- 95,000 BTU/Hr in-shot burner system
- Single point cold water connection
- Patented, self-contained steam system with patent-pending improvements generate more steam than a standard mini-rack oven
- Patent-pending automated wash system reduces the need for daily manual cleaning of the oven
- Patent-pending grease separation system utilizes gravity and a valve rather than a pump
- Oven stand with locking casters and storage space for pans or tools
- Grease collection & transit caddy

MODEL NO.	BV400G WITH STAND
Overall Dimensions Width x Depth x Height	48.0" x 38.0" x 76.5"
Capacity	10 – Standard 18" x 26" Pans 5 – 12" x 20" x 2.5" Steam Pans
Heating System	Gas
Ventilation	Must be Installed under Type 1 Exhaust Hood
Gas BTU's (¾")	95,000 BTU/hr.
Water Connection	¾" Rear
Drain Connection	1½" Tube
Shipping Weight	1,127 lbs.

Listed by ETL



OV452N
Double Bake Chamber Oven
Shown on adjustable height stand



OV450W
Wide Deck Oven
Shown on adjustable height stand

STANDARD FEATURES

- Available in 2 widths: 38.4"w (OV452N & OV450N), or 61.8"w (OV450W)
- Narrow width oven available in both single and double bake chamber models
- Stackable decks.
 - OV452N up to two decks
 - OV450N up to four decks
 - OV450W up to four decks
- Each oven is sold and operated independently
- Stainless steel exterior
- Glazed stone baking surface
- Separately controlled top and bottom elements
- Easy-to-operate digital controls
 - Temperature
 - Time
 - Steam
- Exhaust from each deck is combined for a single point exhaust from the top.
- Illuminated bake chamber.
- Glass loading door opens into the bake chamber – minimal loading space required.
- Oven stands (sold separately) are available in several heights to ensure optimal working height at the oven.

MODEL NO.	OVENS		
	OV450N	OV452N	OV450W
Overall Dimensions			
Width x Depth	38.4 x 52.0"	38.4" x 52.0"	61.8" x 52.0"
Height	Varies with number of ovens and height of stand		
Interior Chamber Height	7.4"	5.1"	7.4"
Stone Surface Dimension	23.6" x 34.1"	23.6" x 34.1"	47.2" x 34.1"
Power Connection(s)	1	2	1
Water Connection(s)	1	2	1

Listed for safety and sanitation by UL



PW1



PW2

STANDARD FEATURES

- Eye-level digital control panel – set heat/humidity system, retarding system (retarding/proofing cabinets only), individual rack timers
- Easy access heat and humidity system – internally mounted, energy efficient
- Modular panel construction – cam lock attachment
- Maximum rack height: 74.0"
- Patented air flow system ensures consistent proofing results through-out the chamber
- Stainless steel interior and exterior
- Two overall heights offered to meet your site requirements: 94.0"H or 99.5"H
- Interior perimeter is supplied with bumpers on all sides to protect the finish
- No flushing required – low maintenance
- Single door units include field reversible door
- Optional self-contained refrigeration system, available in limited sizes (retarding/proofing cabinets only)

See 2019 Price List for Rack Capacity Information

MODEL NO.	PW1E	PW1S/RPW1S	PW2E/RPW2E	PW2S/RPW2S	PW3S
Footprint Width	35.5"	42.0"	62.0"	75.5"	109.0"
Footprint Depth	36.8" to 123.3"	43.3" to 123.3"	43.3" to 123.3"	43.3" to 123.3"	43.3" to 123.3"
Power Options	208-240V/1 or 208-240V/3 (Neutral line required) Amp draw varies by size				
Water Connection	½" FNPT cold water 30-80 psi @ 85" AFF				
Drain Connection	½" FNPT, front or rear drain @ 5" AFF				
Proofer Availability	PW1E	PW1S	PW2E	PW2S	PW3S
Retarder Proofer Availability	N/A	RPW1S	RPW2E	RPW2S	N/A

Listed for safety and sanitation by UL**MB300****STANDARD FEATURES**

- Stainless steel construction
- 16-pan capacity
- Insulated top; optional finished stainless steel top available
- Available with casters or legs

SPECIALTY

WATER METER
WM600 SERIES*Listed for safety by UL***STANDARD FEATURES**

- Wall mounted. Mounting bracket and hardware included
- Easy to follow digital controls
- Dispensing temperature range: 32°F – 125°F. Dispenses up to 1,000 pounds
- Water delivery can be interrupted and resumed without resetting the system
- Shipping weight: 52 lbs.



SPECIALTY

INGREDIENT BINS (STAINLESS STEEL)
ONE, TWO AND THREE COMPARTMENT*Certified by NSF for single compartment***STANDARD FEATURES**

- Designed to store bulk quantities of dry ingredients such as flour and sugar
- Sanitary covered corner design eliminates the need for costly replacement liners
- Casters are sturdy, 3", non-marking and no-lube.; two fixed and two swivel
- Moves easily when fully loaded
- Approximate capacity — 120 lbs. of cake flour or 190 lbs of granulated sugar (in single compartment units)
- Stainless steel bin with sliding cover
- Ingredient labels included
- Fits under tables 36" wide or greater

RETURN GOODS POLICY

Baxter reserves the right to accept or reject return for credit requests for any Baxter items shipped as ordered. Any units or accessories accepted for return are subject to the prevailing restocking, reconditioning and freight charges in effect at time return is authorized. Absolutely no units or accessories will be accepted without formal authorization by the Company. Address all requests in writing to the Customer Care Department, Hobart, 701 S Ridge Avenue, Troy, Ohio 45374-0001.

WARRANTY

ITW Food Equipment Group, LLC warrants new Baxter products and certain products sold by Baxter under other brand names to the original end user ("Owner") when installed within the United States, against defective material and workmanship for one (1) year from the date of original installation. Baxter will, during normal working hours, through one of its Branches or authorized servicing outlets repair or replace, at its option, including service and labor, all parts found to be defective and subject to this warranty.

Certain Baxter products or parts may be warranted for a period other than one (1) year and others may be subject to travel limitations. Certain Baxter parts, expendable by nature and that need to be replaced frequently, may not be covered.

This warranty is conditioned upon Baxter receiving notice of any defect subject to this warranty within thirty (30) days of its discovery by Owner.

This warranty does not apply to damage resulting from fire, water, burglary, accident, abuse, misuse, acts of God, attempted repairs or improper installation by unauthorized persons. Failure to follow use, care, or maintenance instructions in your Instruction Manual may void this warranty.

THIS WARRANTY EXCLUDES ALL ORAL, STATUTORY, EXPRESS OR IMPLIED WARRANTIES WHICH MAY BE APPLICABLE TO BAXTER, INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. Baxter shall have no obligation or liability of any kind or character, including any obligation or liability for consequential or special damages arising out of, or with respect to, the product, its sale, operation, use or repair. Baxter neither assumes nor authorizes anyone else to assume for it any obligation or liability in connection with the product, its sale, operation, or use, other than as stated herein.

WARRANTY (OV500 OR OV310 HEAT EXCHANGER TUBES)

In addition to the standard Baxter one (1) year parts and labor warranty, Baxter agrees to warrant the OV500 or OV310 Heat Exchanger Tubes for an additional nine (9) years from the date of original installation. This additional coverage applies to the OV500 or OV310 Heat Exchanger Tubes only and the associated labor to replace a failed Tube Assembly. This warranty is conditioned upon Baxter receiving notice of any defect subject to this warranty within thirty (30) days of its discovery by Owner or when Owner should reasonably have known of the defect.

This warranty does not apply to damage resulting from fire, water, burglary, accident, abuse, misuse, acts of God, attempted repairs or improper installation by unauthorized persons. Failure to follow use, care, or maintenance instructions in your Instruction Manual may void this warranty.

THE FOREGOING SHALL CONSTITUTE THE EXCLUSIVE REMEDY OF THE PURCHASER OR OTHER PARTY SEEKING TO ENFORCE THE WARRANTY AND THE EXCLUSIVE LIABILITY OF HOBART.

THE ABOVE WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES WHETHER ORAL OR WRITTEN, EXPRESS OR IMPLIED. NO WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE SHALL APPLY.

No agent, dealer, employee or representative of Hobart or Baxter nor any installer or other person is authorized to modify the Limited Warranty in any respect. The invalidity of all or a part of any of the provisions of the Limited Warranty shall not affect or invalidate any other provision of the Limited Warranty.

EXPORT WARRANTY

Baxter's standard warranty does not apply to Export Sales. Rather, for a period of one (1) year from date of original installation not to exceed eighteen (18) months from date of shipment from factory, Baxter:

- will replace, F.O.B. shipping point, shipping charges prepaid and add, any defective parts normally subject to warranty.
- will not cover the cost of any packing, freight, or labor; such costs being the sole responsibility of Dealer.
- There are no oral, statutory or implied warranties applicable to Baxter, including but not limited to any implied warranty of merchantability or fitness for any particular purpose which extend beyond the description on the face hereof.
- Dealer agrees to assume full responsibility for the installation and correction of Baxter products purchased for Export Sales, including all expenses.

Listed by UL, Classified in accordance with NSF/ANSI Standard 4 by UL



HC24EA3
shown (on STAND-28YSGL)



2-HC24EA3
shown (with STCKKIT-24EA stack kit
and STCKKIT-FLG6 flanged Legs)

STANDARD FEATURES

- Stainless steel exterior and cooking compartment with coved interior corners
- Professional Control Package includes:
 - Superheated Steam System with staged fill
 - Lighted power switch with cook and ready lights
 - Timer 60 minute 60 cycle (50 cycle x 1.2) with Constant Steam Setting
- High output stainless steel steam generator with JetDrain system
- Fully insulated cooking compartment
- Heavy duty door and door latch mechanisms
- Shipped 208 volt, 50-60 Hz, 3 phase electrical service; can be field converted
- Split water line connection. 1½" NPT drain connection
- One year limited parts and labor warranty is standard

MODEL NO.	HC24EA3	HC24EA5
Overall Dimensions		
Width x Depth x Height	24" x 33" x 19½"	24" x 33" x 26"
Electrical	208/240/50/60/1/3	
Voltage/Hertz/Phase	480/50/60/3	
KW	9¼	15¾
Capacity - Pans	1"	6
	2½"	3
	4"	2
	6"	1

MODEL NO.	10X4-PERPAN	20X21/2-PANPER	10X21/2-PANPER	20X21/2-SLDPAN
Perforated or Solid	Perforated - half size pan	Perforated - full size pan	Perforated - half size pan	Solid - full size pan
Overall Dimensions Width x Depth x Height	12" x 10" x 4"	12" x 20" x 2½"	12" x 10" x 2½"	12" x 20" x 2½"
Quantity Packaged per Box	2	2	2	1
Shipping Weight	1 lb.	2 lbs.	2 lbs.	2 lbs.

Listed by UL, Classified in accordance
with NSF/ANSI Standard 4 by UL



HC24EO3

Boilerless, counter model steamers designed specifically for supermarkets, delis, seafood and carry-out food departments. Compact size. Uses only 24" counter space. Basic section may be placed on counter, stacked or mounted on optional 4" legs or stand. Choice of two models.

STANDARD FEATURES

- Exterior is polished stainless steel; cooking chamber is stainless steel with coved corners for ease of cleaning
- Fully insulated
- Polished stainless steel wire pan slides are removable
- Stainless steel door; positive heavy-gauge spring-loaded door latch
- Electro-mechanical timer with constant steam mode
- Easy to install – no drain or water connections

MODEL NO.	HC24EO3	HC24EO5
Overall Dimensions		
Width x Depth x Height	24" x 33" x 19½"	24" x 33" x 26"
Electrical		
Voltage/Hertz/Phase	208/240/50/60/1/3	208/50/60/1/3; 240/50/60/1/3 480/50/60/3
KW	8	12
Capacity - Pans		
1"	6	10
2½"	3	5
4"	2	3
6"	1	2

Certified by NSF, Listed by UL (electric), CSA Design Certified (gas)



HEC20

STANDARD FEATURES

- Stainless steel front, sides, and top enclosure panel
- Solid state temperature control
- Thermostat range 200° to 500°
- 4" adjustable chrome legs
- 5 oven racks
- 60 minute timer with audible alarm
- Porcelain enamel on steel oven liner

MODEL NO.	HEC202	HGC202	HEC20	HGC20
Number of Sections	2	2	1	1
Overall Dimensions				
Width x Depth x Height (with legs)	31½" x 28½" x 65½"	31½" x 28½" x 65½"	31½" x 28½" x 29"	31½" x 28½" x 29"
Oven Interior Dimensions				
Width x Depth x Height	15¼" x 21" x 20"	15¼" x 21" x 20"	15¼" x 21" x 20"	15¼" x 21" x 20"
Rack Size				
Width x Depth	14⅜" x 20⅞"	14⅜" x 20⅞"	14⅜" x 20⅞"	14⅜" x 20⅞"
Number of Oven Racks Furnished	10	10	5	5
Heating Specifications				
Voltage/Hertz/Phase	208-240/60/3	120/60/1	208-240/60/3	120-60-1
KW	11.0	N/A	5.5	N/A
BTU/Hr.	N/A	50,000	N/A	25,000
Shipping Weight	500 lbs.	518 lbs.	250 lbs.	259 lbs.

Certified by NSF, Listed by UL (electric), CSA Design Certified (gas)

STANDARD FEATURES

HEC Electric Models

- Stainless steel front, sides and top, painted legs
- Solid state temperature controls adjust from 150° to 500°F
- 60 minute electric timer with buzzer
- Energy-efficient, 2-speed, ½ H.P. motor; preheats to 350°F in 7 minutes
- Includes porcelain interior; six-sided insulation gives energy efficiency

HGC GAS-FIRED MODELS

- Stainless steel front, sides and top, painted legs
- 50,000 BTU/hr. burner per section
- ½ H.P. two speed oven blower motors; 115/60/1 with 6' cord and plug, 8 amps
- Solid state temperature controls adjust from 150° to 500°F
- 60 minute timer with audible alarm
- ENERGY STAR® certified

SPECIAL GAS AND ELECTRIC MODELS

- Computer controls with digital time and temperature read-outs – “D” models
 - Shelf ID
 - Cook & hold cycle
 - Timer sets cook time from one minute to 24 hours
 - 99 programmable preset buttons
- Extra Deep – “X” models



HEC5

MODEL NO.	ELECTRIC MODELS		GAS MODELS	
	HEC5(D) HEC5(D)X	HEC5(D) HEC5(D)X	HGC5(D) HGC5(D)X	HGC5(D) HGC5(D)X
Number of Sections	1	2	1	2
Overall Dimensions Width x Depth x Height (with legs)	“X” Models 45⅞" D 40¾" x 41⅞" x 54¾"	“X” Models 45⅞" D 40¾" x 41⅞" x 70"	“X” Models 45⅞" D 40¾" x 41⅞" x 54¾"	“X” Models 45⅞" D 40¾" x 41⅞" x 70"
Oven Interior Dimensions Width x Depth x Height	“X” Models 26⅞" D 29" x 22⅞" x 20"	“X” Models 26⅞" D 29" x 22⅞" x 20"	“X” Models 26⅞" D 29" x 22⅞" x 20"	“X” Models 26⅞" D 29" x 22⅞" x 20"
Rack Size Width x Depth	“X” Models 24½" D 28¾" x 21⅞"	“X” Models 24½" D 28¾" x 21⅞"	“X” Models 24½" D 28¾" x 21⅞"	“X” Models 24½" D 28¾" x 21⅞"
Number of Oven Racks Furnished	5	10	5	10
Heating Specifications Voltage/Hertz/Phase	208, 240, 480/60/1 or 3		115/60/1	115/60/1
KW	12.5	25	N/A	N/A
BTU's (per oven)	N/A	N/A	50,000	50,000
Shipping Weight	440 lbs. (463 “X” Models)	880 lbs. (926 “X” Models)	464 lbs. (492 “X” Models)	928 lbs. (984 “X” Models)

Listed by UL, Certified by NSF, and meets requirements of ASSE Standard No. 1004



LXGePR
(Short Legs)



LXGePR
(Long Legs)

STANDARD FEATURES

- Hot water or chemical sanitation
- Steam elimination and Energy Recovery (LXGeR model only)
- 70°F-rise Sense-A-Temp™ booster heater (LXGeR model only)
- PuriRinse cycle (potable water rinse to remove chemical residue) (LXGePR model only)
- Top mounted controls with digital cycle/temperature display and advanced service diagnostics
- Deluxe soil management system with large removable stainless steel scrap screen and secondary fine strainer
- Revolving upper and lower anti-clogging wash arms
- Snap in interchangeable upper and lower rinse arms
- 12" door opening
- 3/4" Pressure regulator standard
- Pumped rinse and pumped drain
- Low-chemical alarms – audible and visual
- Auto Clean cycle – washes down inside of machine at shutdown
- Chemical Pumps standard – detergent, rinse aid, delimer plus sanitizer for chemical machines
- Flexible fill and drain hoses provided
- Electric tank heat
- One wine rack

Note: FREE start up conducted on Advansys models by Hobart Service

MODEL NO.	LXGePR advansys		LXGeR advansys	
	Light	Normal	Light	Normal
Machine Ratings – See 1 Page 86				
Racks per Hour Rate	38	29	30	24
Dishes per Hour (25 per Rack Average)	950	725	750	600
Glasses per Hour (36 per Rack Average)	1,368	1,044	1,080	864
Controls	Microcomputer	Microcomputer	Microcomputer	Microcomputer
Tank Capacity – Gallons	2.9	2.9	2.9	2.9
Overall Dimensions – Short (H x W x D)	34 ³ / ₈ " x 23 ¹⁵ / ₁₆ " x 25 ⁹ / ₁₆ "	34 ³ / ₈ " x 23 ¹⁵ / ₁₆ " x 25 ⁹ / ₁₆ "	34 ³ / ₈ " x 23 ¹⁵ / ₁₆ " x 26 ¹³ / ₁₆ "	34 ³ / ₈ " x 23 ¹⁵ / ₁₆ " x 26 ¹³ / ₁₆ "
Overall Dimensions – Tall (H x W x D)	41 ⁷ / ₈ " x 23 ¹⁵ / ₁₆ " x 25 ⁹ / ₁₆ "	41 ⁷ / ₈ " x 23 ¹⁵ / ₁₆ " x 25 ⁹ / ₁₆ "	41 ⁷ / ₈ " x 23 ¹⁵ / ₁₆ " x 26 ¹³ / ₁₆ "	41 ⁷ / ₈ " x 23 ¹⁵ / ₁₆ " x 26 ¹³ / ₁₆ "
Cycle Time – Seconds	94	124	120	146
Tank Heat	1.8 KW	1.8 KW	1.8 KW	1.8 KW
Electric Booster Heater	N/A	N/A	4.9 KW	4.9 KW
Water Usage Per Rack – Gallons	1.14	1.14	.62	.62
Drain Design	Pumped	Pumped	Pumped	Pumped
Door Opening Height	12"	12"	12"	12"
Detergent Pump	Standard	Standard	Standard	Standard
Rinse-Aid Pump	Standard	Standard	Standard	Standard
Delime Pump	Standard	Standard	Standard	Standard
Sanitizer Pump	Standard	Standard	N/A	N/A
Chemical Prime (auto prime)	Standard	Standard	Standard	Standard
Peak Drain Flow – Gallons per minute (Initial rate with full tank)	4.0	4.0	4.0	4.0
Advanced Service Diagnostics	Standard	Standard	Standard	Standard
Advanced Cleaning Cycle	Standard	Standard	Standard	Standard
70° Rise Sense-A-Temp™ Booster Heater	N/A	N/A	Standard	Standard
Incoming Water Temperature Required (minimum)	120°	120°	55°	55°

Listed by UL, Certified by NSF, and meets requirements of ASSE Standard No. 1004

LXeC/LXeH STANDARD FEATURES

- Available in hot water or chemical sanitizing.
- Sense-A-Temp™ booster heater capable of 70° rise, provided on LXeH models
- 32 racks per hour – LXeH
- 34 racks per hour – LXeC
- .74 gallons of water per rack
- 17" door opening
- Low chemical alert indicators
- Chemical pump, includes “auto-prime”
- Automatic Delime notification with cycle
- Revolving upper and lower anti-clogging wash arms: Revolving upper and lower rinse arms
- Top mounted controls with digital cycle/temperature display and advanced service diagnostics
- Removable stainless steel scrap screen
- Pumped Rinse and Pumped Drain
- Includes two dishracks- one peg and one combination
- Chemical pumps standard.

LXeR STANDARD FEATURES

- Steam Elimination and Energy Recovery.
- Sense-A-Temp™ booster heater capable of 70° rise.
- Custom cycle selection – light, normal, heavy.
- Racks per hour: Light – 20; Normal – 24; Heavy – 13.
- 17" door opening.
- Pumped Rinse and Pumped Drain.
- Chemical pumps standard, includes “auto-prime”.
- Low chemical alert indicators.
- Automated delime cycle – includes booster deliming.
- Removable stainless steel scrap screen.
- Revolving upper and lower anti-clogging wash arms: Revolving upper and lower rinse arms.
- Top mounted controls with digital cycle/temperature display and advanced service diagnostics.
- Includes two dishracks – one peg and one combination.

**LXeC/LXeH****LXeR**

MODEL NO.	LXeC	LXeH	LXeR <i>advansds</i>		
			Light	Normal	Heavy
Machine Ratings – See 1 Page 86					
Racks per Hour Rate	34	32	30	24	13
Dishes per Hour (25 per Rack Average)	850	800	750	600	325
Glasses per Hour (36 per Rack Average)	1,224	1,152	1,080	864	468
Overall Dimensions (H x W x D)	33½" x 23½" x 25½"	32½" x 23½" x 25½"	32½" x 23½" x 26½"		
Cycle Time – Seconds	105	109	120	146	275
Tank Heat	1.8 KW	1.8 KW	1.8 KW		
Electric Booster Heater	N/A	4.9 KW	4.9 KW		
Wash Motor – H.P. – See 2 Page 86	.8	.8	.8		
Tank Capacity – Gallons	2.9	2.9	2.9		
Pump Capacity – Gallons per minute – Weir Test – See 3 Page 86	38	38	38		
Rinse Cycle – Gallons per rack	.74 – 120°F minimum	.74 – 180°F minimum	.62 – 180°F minimum		
Rinse Consumption – Gallons per hour minimum	25.2	23.7	18.6	14.9	8.06
Incoming Water Temperature Required (minimum)	120°	110°	55°		
Flow Rate – Minimum gallons per minute	4.7	4.7	4.7		
Peak Rate of Drain Flow – Gallons per minute (Initial rate with full tank)	4	4	4		
Shipping Weight Crated – Approximate	170 lbs.	170 lbs.	185 lbs.		

Listed by UL, Certified by NSF, and meets requirements of ASSE Standard No. 1004



LT1

STANDARD FEATURES

- Low temperature, chemical sanitizing (120°F minimum – 140°F recommended)
- 37 racks per hour
- 1.9 gallons per rack
- Top mounted detergent, sanitizer, and rinse additive pumps
- Deliming cycle
- All stainless steel construction including tank, chamber, doors, and frames
- Self-flushing stainless steel pump strainer; large scrap accumulator

MODEL NO.	LT1
Machine Ratings (Mechanical) – See 1 Page 86	
Racks per Hour (Maximum)	37
Dishes per Hour (Average 18 plates per rack)	666
Glasses per Hour (Average 36 per rack)	1332
Table to Table – Inside Tank at Table Connection (Inches)	25¼"
Overall Dimensions (H x W x D) (Inches)	69" x 28½" x 28"
Wash Motor – H.P. – See 2 Page 86	1
Wash Tank Capacity – Gallons	1.9
Wash Pump Capacity – Gallons per Minute – Weir Test – See 3 Page 86	45
Rinse – Minutes operated during hour of capacity operation – See 5 Page 86	13.57
Seconds of rinse per rack	22
Rinse Consumption – Gallons per hour – Maximum at 20 lbs. Flow pressure	62.9
Rinse Cycle – Gallons per rack – at 20 PSI flow	1.9 – 120°F minimum – 140°F recommended
Peak Rate of Drain Flow – Gallons per minute (Initial rate with full tank)	2
Exhaust Requirements – Cubic feet per minute	0
Shipping Weight Crated – Approximate, Unit only, with booster	304 lbs.

Listed by UL, Certified by NSF, and meets requirements of ASSE Standard No. 1004



Advansys AM15VL

Advansys AM15VLT

STANDARD FEATURES

- Ventless Energy Recovery captures heat energy while condensing steam from the wash and rinse cycle to preheat the incoming cold water
- Does not require a vent hood
- NSF pot and pan certified for 2, 4 & 6 minute cycles
- Sense-A-Temp™ 70°F rise electric booster heater
- Adjustable cycle times of 1, 2, 4 and 6 minutes plus condense time.
- .74 gallons per rack final rinse water
- 40 racks per hour – hot water sanitizing
- Straight-through or corner installation
- 17" door opening (AM15VL only)
- 27" door opening for 18" x 26" sheet pans or 60 quart mixing bowl (AM15VLT only)
- Includes 6-pan sheet pan rack (AM15VLT only)
- Front loading shelf available for front load configurations.

Note: FREE start up conducted on Advansys models by Hobart Service

MODEL NO.	advansys AM15VL	advansys AM15VLT (Tall)
	Hot Water Sanitizing	Hot Water Sanitizing
Machine Ratings (Mechanical) – See 1 Page 86		
Racks per Hour (Maximum)	40	40
Dishes per Hour (Average 25 per rack)	1,000	1,000
Glasses per Hour (Average 45 per rack)	1,800	1,800
Table to Table – Inside Tank at Table Connection (Inches)	25¼"	25¼"
Overall Dimensions (H x W x D) (Inches)	69" x 29¾" x 35"	80" x 29¾" x 30¾"
Wash Motor – H.P. – See 2 Page 74	2	2
Wash Tank Capacity – Gallons	14	14
Wash Pump Capacity – Gallons per Minute – Weir Test – See 3 Page 86	160	160
Electric Heating Unit (Regulated)	5 KW	5 KW
Electric Booster Heater	8.5 KW	8.5 KW
Rinse – Minutes operated during hour of capacity operation – See 5 Page 86	6.66	6.66
Seconds of rinse per rack	10	10
Rate of Rinse Flow – Gallons per minute	4.4	4.4
Rinse Consumption – Gallons per hour – Maximum (cold)	29.6	29.6
Rinse Cycle – Gallons per rack	.74 – 180°F minimum	.74 – 180°F minimum
Peak Rate of Drain Flow – Gallons per minute (Initial rate with full tank)	14	14
Exhaust Requirements (CFM)	0	0
Shipping Weight Crated – Approximate – Unit only	451 lbs.	494 lbs.

Listed by UL, Certified by NSF, and meets requirements of ASSE Standard No. 1004

**AM15****AM15T****STANDARD FEATURES**

- NSF pot and pan certified for 2, 4 & 6 minute cycles
- Adjustable cycle times of 1, 2, 4 and 6 minutes plus condense time
- .74 gallons per rack final rinse water
- 58 racks per hour – hot water sanitizing
- 65 racks per hour – chemical sanitizing
- Straight-through or corner installation
- Optional, Sense-A-Temp™ 70°F rise electric booster heater
- 17" door opening (AM15 only)
- 27" door opening for 18" x 26" sheet pans or 60 quart mixing bowl (AM15T only)
- Includes 6-pan sheet pan rack (AM15T only)
- Front loading shelf available for front load configurations

MODEL NO.	AM15		AM15T (Tall)	
	Hot Water Sanitizing	Chemical Sanitizing	Hot Water Sanitizing	Chemical Sanitizing
Machine Ratings (Mechanical) – See 1 Page 86 Racks per Hour (Maximum)	58	65	58	65
Dishes per Hour (Average 25 per rack)	1,450	1,625	1,459	1,625
Glasses per Hour (Average 45 per rack)	2,610	2,925	2,610	2,925
Table to Table – Inside Tank at Table Connection (Inches)	25¾"	25¾"	25¾"	25¾"
Overall Dimensions (H x W x D) (Inches)	66½" x 27" x 28½"		77½" x 27" x 28½"	
Wash Motor – H.P. – See 2 Page 86	2	2	2	2
Wash Tank Capacity – Gallons	14	14	14	14
Wash Pump Capacity – Gallons per Minute – Weir Test – See 3 Page 86	160	160	160	160
Heating Equipment – (For keeping wash water hot) See 4 Page 86 Gas Burner (Regulated) Natural/LP Gas BTU/Hr.	Consult Factory	Consult Factory	Consult Factory	Consult Factory
Electric Heating Unit (Regulated)	5 KW	5 KW	5 KW	5 KW
Rinse – Minutes operated during hour of capacity operation – See 5 Page 86	9.66	10.83	9.66	10.83
Seconds of rinse per rack	10	10	10	10
Rate of Rinse Flow – Gallons per minute At 20 lbs. Flow Pressure	4.4	4.4	4.4	4.4
Rinse Consumption – Gallons per hour – Maximum At 20 lbs. Flow pressure	42.9	48.1	42.9	48.1
Rinse Cycle – Gallons per rack – at 20 PSI flow	.74 – 180°F minimum	.74 – 120°F minimum	.74 – 180°F minimum	.74 – 120°F minimum
Electric Booster Heater	8.5 KW	N/A	8.5 KW	N/A
Peak Rate of Drain Flow – Gallons per minute (Initial rate with full tank)	14	14	14	14
Exhaust Requirements – Cubic feet per minute	450	450	450	450
Shipping Weight Crated – Approximate Unit only, with booster	354 lbs. w/o Booster 384 lbs. w/Booster	354 lbs.	388 lbs. w/o Booster 418 lbs. w/Booster	388 lbs.

Listed by UL, Certified by NSF, and meets requirements of ASSE Standard No. 1004



CL44eN-BAS

STANDARD FEATURES

- 202 racks per hour
- Opti-Rinse™ system
- Rapid return conveyor drive mechanism
- Large double door opening for ease of cleaning
- Doors are insulated & hinged with door interlock switches
- 19.5" chamber height opening (accepts sheet pans)
- Top mounted micro-processor control module
- Energy saver mode (programmable auto-shut down)
- Dirty water indicator
- Manager activated low temperature alert
- NSF rated configurable pot and pan dwell mode
- Configurable "intelligent" delime notification
- Service diagnostics
- Self-aligning wash manifolds
- Stainless steel anti-clogging wash arms
- Removable pump intake screen
- Stainless steel self-draining pump and impeller
- Single, sloping scrap screen and deep scrap basket
- Stainless panels enclose perimeter and bottom
- Door actuated drain closure
- Convertible hot water or low temp final rinse
- Vent fan and booster heater control
- ENERGY STAR® Certified

MODEL NO.	CL44eN-BAS
Machine Ratings (Mechanical) See 1 Page 86 Racks per hour (19½" x 19½")	202
Conveyor Speed – feet per minute	5.6 max.
Dishes per Hour (Average 18 plates per rack)	3,636
Glasses per Hour (Average 36 per rack)	7,272
Floor Space – Table to Table (Inches)	44
Overall Dimensions – H x W x D (Inches)	70¾ x 45½ x 30¾
Motor – See 2 Page 86 (H.P.) Conveyor Drive	2 ¾
Number of Tanks	1
Tank Capacity – Gallons	23
Pump Capacity – See 3 Page 86 Gallons per Minute – Weir Test	165
Heating Equipment – See 4 Page 86 – (For keeping power wash and/or power rinse water hot) Gas Burners (with Natural Gas) – BTU per hour	78,000
Electric Heating Unit – Size Used	Regulated 15 KW
Rinse – See 5 Page 86 – Minutes operated during hour of maximum operation	60
Final Rinse Flow – Gallons per minute At 20 PSI Flow Pressure	2.1
Final Rinse Flow – Gallons per hour – MAXIMUM At 20 PSI Flow Pressure	126
Rinse – 20 PSI Flow Pressure Gallons/Rack	Hot Water Sanitizing – .62 - 180°F Chemical Sanitizing – .62 - 140°F
Steam Consumption – Pounds per hour – MAXIMUM Approx. 30 lbs. per hour = 1 boiler H.P. (BHP) Dishwasher, based on 20 PSI steam and on customer supplying final rinse water at 180°F maximum	65 lbs./hr.
Steam Booster, if used on 20 PSI steam – Pounds per hour – 20 PSI water flowing – 130°F entering water raised to 180°F minimum	60 lbs./hr.
Exhaust Requirements – Cubic feet per minute (CFM)	200
Entrance End	
Discharge End	400
Discharge End w/Blower Dryer	400
Peak Rate of Drain Flow – Gallons per minute (GPM) (Initial rate with full tank)	38
Shipping Weight Crated – Approximate	613 lbs.

Listed by UL, Certified by NSF, and meets requirements of ASSE Standard No. 1004

Side Loading Option SL23e and SL30e



An accessory to adapt any Hobart CLeN Dishwasher to a corner or side loading operation. Adds 23" or 30" to length of machine. Here is a way to save up to 20 square feet or more in your dishroom layout.

Racks of soiled dishes, trays, silverware, etc. are automatically indexed 90° from the soiled dishtable into the dishwasher by means of a stainless steel reciprocating, center-indexing pawl.

Stainless steel. 100 lbs. shipping weight.

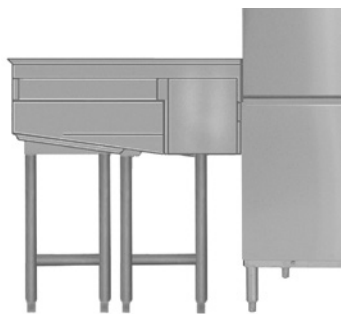
Built-In Electric Booster Heater



A built-in 15-30 KW, electric, stainless steel, pressure-less (atmospheric pressure), pre-wired and pre-plumbed electric booster heater is an option for all CLeN models. This built-in booster heater represents the best alternative for our customer, as it is designed to deliver the volume of water required by Hobart's exclusive Opti-Rinse™ system. This feature saves installation cost and coordination, process for ordering equipment, valuable floor space, and operator training. The booster heater is also designed to simplify de-liming procedures, which will promote a longer life cycle as compared to other freestanding booster heaters.

Booster heaters on CLeN models ship from the factory as 30 KW and are field convertible to 15KW.

DDU38e Direct Drive Unloader



DDU38e shown with CL44eN Dishwasher

An accessory which adapts to any CLeN that automatically discharges the racks at a 90° angle from the operation of the machine onto a clean table. The DDU38e is driven by the conveyor drive of the CLeN and does not require an additional electrical source. The DDU38e only adds 38" to the overall length of the machine, but it can save nearly 20 square feet of floor in your dishroom. Stainless steel construction with a 1½" drain fitting.

Blower-Dryer Option for CLeN



The most energy-, space- and performance-efficient conveyor blower dryer we've ever made.

Using 76% less energy and 45% less space than prior models, the CLeN blower dryer is the perfect finishing touch to one of the most energy-, water-, labor- and space-efficient conveyor warewashers in the industry, Hobart's CLeN.

Listed by UL, Certified by NSF

**STANDARD FEATURES**

- 8-20 racks per hour @ 1.2 gallons/cycle (PWV/PW10)
- 7-13 racks per hour @ 1.2 gallons/cycle (PWVeR/PW10eR)
- 8-20 racks per hour @ 2.35 gallons/cycle (PW20)
- 7-13 racks per hour @ 2.8 gallons/cycle (PW20eR)
- Steam Elimination and Energy Recovery (PWVeR/PW10eR/PW20eR)
- Advanced delime notification and cycle (includes booster) (PWVeR/PW10eR/PW20eR)
- Sense-a-Temp™ booster heater capable of 70° rise
- Front loading, split-door configuration (PW10, PW10eR, PW20, PW20eR)
- Front loading, vertical door configuration (PWV/PWVeR)
- Flat-bottomed, stainless steel frame rack with flat grid rack and tray support racks
- Chamber accepts 10 full-sized sheet pans or 140-quart mixing bowl in the PW10/PW10eR and 20 full-sized sheet pans or 140-quart mixing bowl in the PW20/PW20eR
- Upper and lower revolving, debossed anti-clogging wash arms and upper and lower revolving rinse arms
- Heavy-duty door and door hinges
- Large, removable stainless steel scrap screens and scrap bucket
- Timed wash cycles for 2-4-6 minutes
- Integrated detergent connections
- Automatic pumped drain
- Corrosion-resistant impeller
- All stainless steel construction
- Spray hose

Note: FREE start up conducted on Advansys models by Hobart Service

MODEL NO.	PWV & PW10			PWVeR & PW10eR			PW20			PW20eR		
	2 Minute Wash	4 Minute Wash	6 Minute Wash	2 Minute Wash	4 Minute Wash	6 Minute Wash	2 Minute Wash	4 Minute Wash	6 Minute Wash	2 Minute Wash	4 Minute Wash	6 Minute Wash
Racks per Hour Rate – See 1 Page 86	20	12	8	13	9	7	20	12	8	13	9	7
Tank Capacity – Gallons	21 gallons						34 gallons					
Overall Dimensions – H x W x D	78.04" H x 34.86" W x 37.20" D			88.47" H x 34.86" W x 37.20" D			78.60" H x 58.26" W x 37.20" D			89.11" H x 58.26" W x 37.20" D		
Wash Cycle Time – Minutes	2, 4, 6 minutes						2, 4, 6 minutes					
Water Usage Per Cycle – Gallons	1.2 gallons						2.35 gallons			2.8 gallons		
Drain Design	Pumped						Pumped					
Door Opening Height x Width	33.79" H x 26.185" W (PW10 & PW10eR) 28" H x 26.185" W (PWV & PWVeR)						33.79" H x 49.60" W					
Chemical Connection Capability	Standard						Standard					
Delime Pump	N/A			Standard			N/A			Standard		
Peak Drain Flow – GPM	18						26					
Advanced Service Diagnostics	Standard			Standard			Standard			Standard		
Advanced Cleaning Cycle	N/A			Standard			N/A			Standard		
70° Rise Sense-A-Temp™ Booster Heater	Standard						Standard					
Incoming Water Temperature Required (minimum)	110°			55°			110°			55°		

**STANDARD FEATURES**

- Polished stainless throughout; sinks, drainboards, splashes and rolled rims are 14-gauge
- Heavy-duty centrifugal pump with 4" diameter intake, 3" diameter outlet, and 300+ GPM
- 2 H.P. totally enclosed wash pump motor with permanently sealed bearings
- Stainless steel pump and impeller
- Self-draining pump
- Low water protection for wash pump motor with inherent motor protection
- 8-1½" angled stainless steel wash nozzles
- 11" high x 2½" deep backsplash
- On/Off wash pump motor switch
- Options include wash sink heater, faucets, pre-rinse sprays, lever drains, wash sink sump strainer, automatic shutdown timer, auto fill, wash tank separator, utensil basket, overshelf, undershelf and disposer swirl piping
- Disposer controls with or without single point electrical connection
- Available in left-to-right and right-to-left configurations
- Removable, welded H frame leg sets and adjustable bullet feet
- Detachable and adjustable height cross rails
- Dual inlet strainers

UNIT SIZING SELECTIONS:

- **Soiled and Clean End Edges:**
Hemmed, rolled, end splash, dishmachine connection
- **Soiled and Clean Drainboards:**
12", 18", 20", 24", 30", 36", 42", 48", 54", 60"
(Soiled Drainboards 36" and above may include 15" disposer cone); (18½" Clean Drainboard only)
- **Scrappers:**
20", 36" (36" scrapper may include 7" disposer flange)
- **Wash Sink:**
30", 32", 36", 42", 48", 54", 60"; available as wash sink only for "weld-in" application
- **Rinse Sink:**
15", 18", 20", 24", 30", 36"
- **Sanitizer Sink:**
18½", 20", 24", 30", 36"
- **Electrical Specifications:**
208-240/60/3, 480/60/3

Custom configurations to fit your application can be designed. Contact your Hobart representative for further information.

- 1. MACHINE RATINGS** Racks per hour ratings represent the maximum mechanical capacity of each dishmachine. For average conditions, base estimate on approximately 70% of the machine capacity and average rack capacity of:

16-18	9" Dinner Plates Per Rack
25	Water Glasses Per Rack
16	Coffee Cups Per Rack
100	Pieces of Flatware Per Rack

All Racks 20" x 20".

Production of clean dishes will vary with factors such as: the type and efficiency of the dishroom layout, traffic flow, amount, type and length of time the food soil has remained on the dishes, relative hardness of water, industry of the dishmachine operator, fluctuations in flow of soiled dishes to the dishroom & so on.

Your Hobart representative will be glad to help you select the right dishmachine to fit your particular warewashing requirements.

- 2. MOTORS & PUMPS** Highly efficient motors, pumps (Weir Tested) and wash systems – designed for each particular model – assure the proper volume of water at the required pressure.
- 3. PUMP CAPACITY** Volume of water circulated over dishes is not water consumption. When tank has been filled, water is circulated by the pump.
- 4. HEATING EQUIPMENT** Supplied to keep the water hot in the tank, or tanks, of the machine. When electric heat is specified, a disconnect switch (NOT furnished by Hobart) is recommended. The disconnect switch must be supplied and installed by the electrical contractor and connected in the heater electrical supply circuit ahead of machine at the time of installation.
- 5. RINSE WATER** Adequate hot rinse water is essential to operation. Actual consumption of hot water will vary with pressure of the supply, speed at which machine is operated, and the general dish table layout. In estimating hot water requirements the following points should be considered:
- Pressure – A flowing pressure of 20 lbs. is ideal. "Flowing Pressure" is indicated on a pressure gauge installed at the inlet side of final rinse valve and read when rinse water is flowing. Pressure regulators are recommended when the flowing pressure exceeds 25 lbs.
 - Rate of flow – The figures indicate relatively high momentary requirements of the models on which operation is intermittent (AM Series). For these models, ample storage capacity should be included in order that the "non-flowing" periods may be used for building up the supply.
 - Temperature – NSF Standards require final rinse of 180°F minimum for hot water sanitization machines registered on the final rinse thermometer. Where regular hot water supply at the machine is below 180°F, a booster heater is recommended.
- Please refer to booster sizing charts for proper booster size.

To assure prompt handling of your order, include complete data on the following:

USER'S NAME, ADDRESS AND ZIP CODE

SHIPPING DATE REQUIRED

For CLeN, CLeN-EGR and CLeN-ADV Dishwashers:

Model Number
 Direction of Operation – Right to Left or Left to Right
 Electrical Specifications – Voltage • Cycle • Phase
 Type of Heat:
 Electric
 Gas: Natural or LP Gas
 Steam: Flowing Steam Pressure

For FT Dishwasher:

Model Number
 Direction of Operation – Right to Left or Left to Right
 Electrical Specifications – Voltage • Cycle • Phase
 Type of Heat:
 Electric
 Steam: Flowing Steam Pressure, Type: Coils

For Final Rinse Water Booster:

Electric
 Steam
 Model Number
 Flowing Steam Pressure
 Incoming Water Temperature

Include list of desired accessories.

Operator training videos are available at extra cost on selected machines.

Contact your local Hobart office for complete information.

Listed by ETL

STANDARD FEATURES

- **Bearings** are permanently lubricated.
- **Dual Directional Grinding** – Automatic reversing of disposer's direction of rotation when installed with Control Group 5 or 6. Increases life and efficiency of grinding elements by dispersing the wear factor. Will reverse unit, freeing it up in case a jamming situation occurs.
- **Cones** – All models FD4/50 through FD4/125 fit the same large 7 inch throat opening diameter. Cones of hydraformed stainless steel, 18 inch bowl diameter is standard; 15 inch is optional. Both feature a dual directional water inlet for flushing waste into the disposer.
- **Vinyl Isolating Ring** eliminates metal to metal contact and prevents vibration and noise transmission. Sink and trough mounting accessories are also available.
- **Adapters** are available to install Hobart Disposers on existing Cones.

**FD4/75****FD4/500****FD4/150****HOBART DISPOSER SELECTOR CHART**

MEALS PER DAY		200 to 300	300 to 500	500 to 1000	1000 to 2000	2000 to 4000
Restaurant Hotel Hospital	Soiled Dish Table	FD4/125	FD4/150	FD4/200	FD4/300	FD4/500
Cafeteria Commissary School	Soiled Dish Table	FD4/75	FD4/150	FD4/150	FD4/200	FD4/300
Point of Origin	Vegetable-Salad Prep Area	FD4/75	FD4/125	FD4/125	FD4/150	FD4/200
	Scullery Area	FD4/50	FD4/75	FD4/75	FD4/75	FD4/125

MODEL NO.	FD4/50	FD4/75	FD4/125	FD4/150	FD4/200	FD4/300	FD4/500
Motor – H.P.	½	¾	1¼	1½	2	3	5
Electrical Characteristics	120/208-240/60/1 110-120/220-240/50/1 208-240/480/60/3 220-240/380-415/50/3			115/230/60/1 110/220/50/1 208-230/460/60/3 208/415/50/3		208-230/460/60/3 208/415/50/3	
Water Inlet (Flow-Controlled) Rate of Flow–Gallons per minute	5	5	5	8	8	8	10
Table Opening Required 16" for 15" cone 19" for 18" cone	Cones are available in 15" and 18" bowl diameters with 7" I.D. throats. Weld-in type 7" I.D. sink or trough adapter is furnished with accessory Group D. Bolt-in type adapter for 3½" to 4" sink drain opening is furnished with accessory Group E. Use only with FD4-50, FD4-75 and FD4-125.						
Height of Drain Outlet From Floor – Based on 34" high table	17¼" (with 1½" O.D. tail piece furnished)			18⅝" (outlet flange tapped for 2" pipe)		15⅞" (outlet flange tapped for 2" pipe)	
Shipping Weight – Gross max. of basic unit – Approximate	60 lbs.	60 lbs.	60 lbs.	115 lbs.	115 lbs.	115 lbs.	220 lbs.

Note: Adapters are made available to install Hobart Disposers on existing cones. Short upper housing is available for FD4-50, FD4-75, and FD4/125 only.

GROUP A – For All Models
Use with Long Upper Housing


Vinyl Scrapping Ring



Stainless Steel Silver-Saver Sleeve with Side Feed Hole



Water Swirl



Vacu-

GROUP C – For All Models
Use with Long Upper Housing


Pre-Rinse Spray with Wall Bracket



Vinyl Silver-Saver Splash Guard Ring



Vacuum Breaker

GROUP B – For All Models
Use with Long Upper Housing


Vinyl Silver-Saver Splash Guard Ring



Water Swirl



Vacuum Breaker

GROUP D – For All Models
Use with Long Upper Housing


Vinyl Silver-Saver Splash Guard Ring



7" I.D. Stainless Steel Weld-in Adapter for Sink



Fixed Direction Water Inlet for Sink



Vacuum Breaker

GROUP E – Models FD4/50 thru FD4/125


NOTE: For use with Short Upper Housing Foodwaste Disposer only



Cover Stopper and Sink Adapter Assembly for 3½" to 4" Sink Opening



Fixed Direction Water Inlet for Sink



Vacuum Breaker

Listed by UL for use with FD Disposers

Group 4 –
For Models
FD4/50 thru
FD4/200


Includes:
 Manual Reversing Switch
 NEMA I Enclosure
 NEMA 4 Enclosure Optional
 Not available above 250 volts
 Optional Solenoid Valve

Group 5 –
For All Models


Includes:
 Magnetic Contactors
 Pushbutton Start and Stop
 Automatic Reversing
 Made from NEMA 4x Enclosure
 Solenoid Valve

Group 6 –
For All Models


Includes:
 Magnetic Contactors
 Pushbutton Start and Stop
 Automatic Reversing
 Time Delay for water after shutoff
 Line Disconnect
 Solenoid Valve
 Made from NEMA 4x Enclosure

RETURN GOODS POLICY

Hobart reserves the right to accept or reject return for credit requests for any Hobart items shipped as ordered. Any units or accessories accepted for return are subject to the prevailing restocking, reconditioning and freight charges in effect at time return is authorized. Absolutely no units or accessories will be accepted without formal authorization by the Company. Address all requests in writing to the Customer Care Department, Hobart, 701 S Ridge Avenue, Troy, Ohio 45374-0001.

WARRANTY

Hobart Corporation ("Hobart") warrants new Hobart products and certain products sold by Hobart under other brand names to the original end user ("Owner") when installed within the United States, against defective material and workmanship for one (1) year from the date of original installation. Hobart will, during normal working hours, through one of its Branches or authorized servicing outlets repair or replace, at its option, including service and labor, all parts found to be defective and subject to this warranty.

Certain Hobart products or parts may be warranted for a period other than one (1) year and others may be subject to travel limitations. Certain Hobart parts, expendable by nature and that need to be replaced frequently, may not be covered.

This warranty is conditioned upon Hobart receiving notice of any defect subject to this warranty within thirty (30) days of its discovery by Owner.

This warranty does not apply to damage resulting from fire, water, burglary, accident, abuse, misuse, acts of God, attempted repairs or improper installation by unauthorized persons. Failure to follow use, care, or maintenance instructions in your Instruction Manual may void this warranty.

This Warranty Excludes All Oral, Statutory, Express Or Implied Warranties Which May Be Applicable To Hobart, Including, But Not Limited to Any Implied Warranty Of Merchantability And Fitness For Particular Purpose. Hobart shall have no obligation or liability of any kind or character, including any obligation or liability for consequential or special damages arising out of, or with respect to, the product, its sale, operation, use or repair. Hobart neither assumes nor authorizes anyone else to assume for it any obligation or liability in connection with the product, its sale, operation, or use, other than as stated herein.

EXPORT WARRANTY

Hobart's standard warranty does not apply to Export Sales. Rather, for a period of one (1) year from date of original installation not to exceed eighteen (18) months from date of shipment from factory, Hobart:

- will replace, F.O.B. shipping point, shipping charges prepaid and add, any defective parts normally subject to warranty.
- will not cover the cost of any packing, freight, or labor; such costs being the sole responsibility of Dealer.
- There are no oral, statutory or implied warranties applicable to Hobart, including but not limited to any implied warranty of merchantability or fitness for any particular purpose which extend beyond the description on the face hereof.
- Dealer agrees to assume full responsibility for the installation and correction of Hobart products purchased for Export Sales, including all expenses.



STANDARD SERVICE (T&M)

Out of warranty?
Fix it fast and fix it right the first time to avoid additional downtime cost.



MAINTENANCE INSPECTIONS

Stop expensive breakdowns before they start. Maintenance inspections allow you to know ahead of time if a breakdown is on the horizon.



HOBART CARE

Our offerings start with Hobart Care, an annual service plan designed to deliver the most essential service to help keep your costs under control while minimizing equipment downtime.



HOBART ASSURANCE

Guaranteed response times and planned annual maintenance ensure that your food equipment will stay up and running with minimal downtime.



HOBART PROSURANCE™





Our most comprehensive plan includes planned annual maintenance, unlimited service calls, and replacement of expendable parts.

GOOD

BETTER

BEST

Our service plans include all travel, labor, parts & freight.

	24/7 Coverage (Including Holidays)	8:00-5:00 Coverage Emergency Response	Non- Emergency Response	Expedited Parts	Maintenance Inspection	Proactive Maintenance	Expendable Parts Coverage	Coverage for Water Quality Damage	Accidental Damage Coverage
 Hobart Prosurance*	4 Hours (Emergency Only)	4 Hours	24 Hours	✓	✓	✓	✓	Optional	Optional
 Hobart Assurance	6 Hours (optional) (Emergency Only)	1 Business Day	2 Business Days	Optional	Optional	N/A	Optional	N/A	Optional
 Hobart Care	8 Hours (optional) (Emergency Only)	1 Business Day	3 Business Days	N/A	N/A	N/A	N/A	N/A	N/A
 Hobart Standard Service (T&M)	Available (Overtime)	1 Business Day	3 Business Days	N/A	N/A	N/A	N/A	N/A	N/A

✓ = Included

N/A = Not Available

* Available for warewash & FEG bakery only

Benefits of Choosing a Service Plan with Hobart Service

- ✓ Having a service agreement helps to eliminate downtime within the kitchen, with our fast response times and high priority dispatching for emergency repairs.
- ✓ Service agreement options like Hobart Assurance and Hobart Prosurance™ allow parts to be expedited, and repairs get done faster.
- ✓ Optional emailed notifications on all your service calls to let you know when your call has been scheduled, completed, and when parts have been ordered.
- ✓ Identify potential issues before they happen with service agreement plans that include preventive maintenance.
- ✓ Fix your annual maintenance budget by signing up for a service agreement. Don't be caught off guard for an unplanned repair.



701 South Ridge Avenue
Troy, Ohio 45374-0001

937 332-3000
888 4HOBART
888 446-2278

www.hobartcorp.com
www.baxtermfg.com
www.traulsen.com