



PROJECT NAME: _____

LOCATION: _____

ITEM: _____ QTY: _____

MODEL: _____

COUNTERTOP THERMOSTATIC GAS GRIDDLE - SRTG SERIES
 SRTG24 | SRTG36 | SRTG48 | SRTG60



SRTG24

Sierra Series Countertop Thermostatic Gas Griddle was developed to provide the best cooking experience, combining a high standard of quality, performance and durability to satisfy all professional kitchens demands.

STANDARD FEATURES

- Available in 24" (610 mm), 36" (915 mm), 48"(1,220 mm) and 60"(1,525 mm) width.
- Stainless steel front and sides.
- 12" Splash guards.
- 3/4" (19.05 mm) thick polished carbon steel working griddle plate.
- Fully welded griddle plate.
- Enameled burners placed every 12", providing uniformity when operating.
- 200-575°F Energy-saving adjustable thermostat to control desired griddle plate surface temperature.
- Accessible pilots through front panel.
- Orange paint injected aluminum knobs providing for better toughness and durability.
- 1- year parts and labor warranty.
- 4" adjustable chromed carbon steel legs.
- Units are shipped ready for Natural Gas(NG). A Propane Gas(LP) conversion kit and NG/LP regulator is supplied with the unit.
- Easily removable stainless steel griddle grease trap.
- Griddle grease trap capacity:

COLLECTING TRAY CAPACITY	MODEL			
	SRTG24	SRTG36	SRTG48	SRTG60
	1.05 gal (4.6 L)	1.05 gal (4.6 L)	2.64 gal (10 L)	1.05 gal (2x4.6 L)

ACCESSORIES/OPTIONAL

- Pressure regulator comes standard. not optional
- Propane Gas(LP)/Natural Gas(NG) conversion kits.



SRTG042222


3560 NW 56th Street
Fort Lauderdale, FL 33309

Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax.: 786.661.4100

5659 Royalmount Avenue
Montreal, Qc, Canada H4P 2P9

Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax.: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com



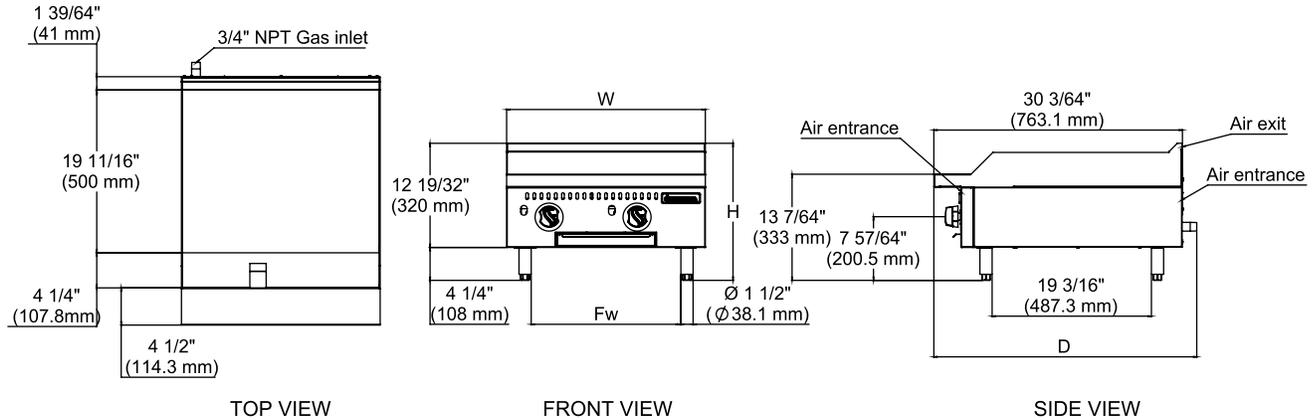

SPECIFICATIONS

Models	Exterior Product Dimensions & Weight					Shipping Crate Dimensions & Weight			
	Width (W)	Depth (D)	Height (H)	Fw	Weight	Width	Depth	Height	Weight
SRTG24	24" (610 mm)	32" (812.8 mm)	16 27/32" (428 mm)	18 3/32" (459.5 mm)	165 lb (75 Kg)	27 61/64" (710 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	196 lb (89 kg)
SRTG36	36" (915 mm)	32" (812.8 mm)	16 27/32" (428 mm)	31 9/32" (794.5 mm)	234 lb (106 Kg)	40 5/32" (1020 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	282 lb (128 kg)
SRTG48	48" (1220 mm)	32" (812.8 mm)	16 27/32" (428 mm)	43 9/32" (1099.5 mm)	322 lb (146 Kg)	52 31/32" (1320 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	355 lb (161 kg)
SRTG60	60" (1525 mm)	32" (812.8 mm)	16 27/32" (428 mm)	26 5/16" (2x668.3 mm)	368 lb (167 Kg)	64 1/16" (1630 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	439 lb (199 kg)

UTILITY INFORMATION

Models	Burners	GAS SUPPLY			
		Propane	Natural	Manifold Pressure	
		BTU/h	BTU/h	Natural Gas	Propane Gas
SRTG24	2	70,000	70,000	4" W.C	10" W.C
SRTG36	3	105,000	105,000		
SRTG48	4	140,000	140,000		
SRTG60	5	175,000	175,000		

- 35,000 BTU/h burners placed every 12", providing best performance.
- Manifold pressure is 4" W.C (Natural Gas) or 10" W.C (Propane Gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.

* NOTE: In line with its policy to continually improve its product, Sierra Range reserves the right to change materials and specifications without notice.

INSTALLATION INSTRUCTIONS

A pressure regulator sized for this unit is included. The gas line connecting to the range must be 3/4" or larger. If flexible connectors are used, the inside diameter must be 3/4" or larger. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.4. These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.