


TECHNICAL SCHEME

SPIKA MS700-22

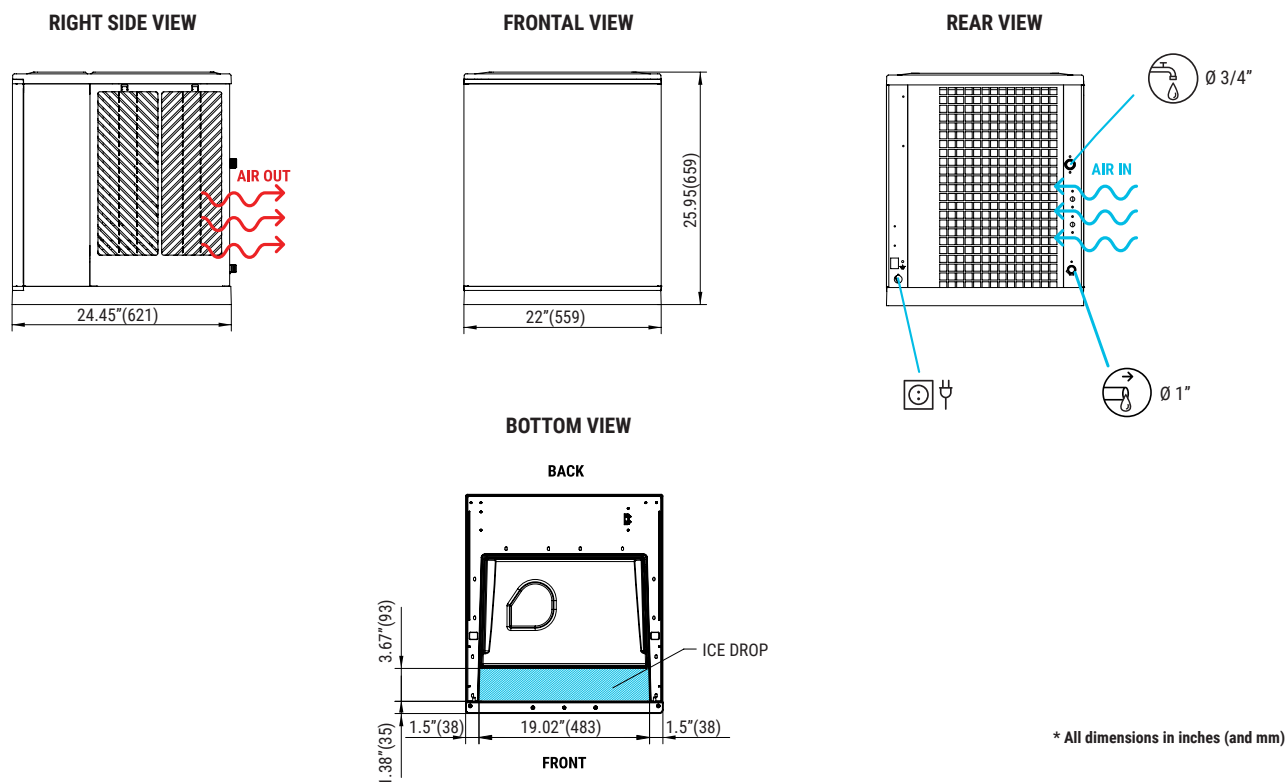

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14.5 psi (1 bar) / 87 psi (6 bar)

240/480 Ice cubes/cycle

V	Hz	ph
115	60	1N

		HALF DICE				
		SPIKA MS700-22 AIR COOLED				
°F	°C	50° 10°	60° 15°	70° 21°	86° 30°	
50° 10°		699	694	639	595	
68° 21°		668	661	617	573	
90° 32°		606	595	553	507	
109° 43°		496	485	437	397	

		FULL DICE				
		SPIKA MS700-22 AIR COOLED				
°F	°C	50° 10°	60° 15°	70° 21°	86° 30°	
50° 10°		707	703	647	567	
68° 21°		676	678	625	546	
90° 32°		613	602	527	483	
109° 43°		472	462	416	378	

MODELS

		(BTU/h)	(W)	(W) 109°F	(AWG/mm²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)			
SPIKA MS700-22 A		13.853	4.060	1.300	12/2,5	3	25	5,25	16,56	17,4	8.636	2.531	155.21	180
SPIKA MS700-22 W		13.853	4.060	1.300	12/2,5	3	25	-	-	-	8.636	2.531	155.21	180




ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



**2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR**
Read our warranty policy
to know more about
limitations and exclusions






SPIKA NG 360

115 V / 60 Hz

SELF-CONTAINED ICE CUBE MACHINE



3 YEARS
WARRANTY
PARTS & LABOR

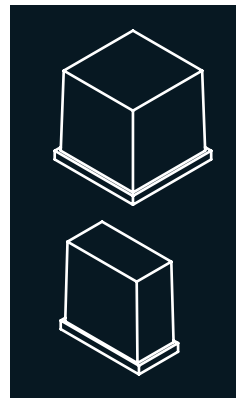

FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES.
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME.
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ SMART FRONT VENTILATION SYSTE, (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT.
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER.
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES.
- ▶ NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION.
- ▶ LED ON/OFF SWITCH / PCB MOUNTED AT THE BOTTOM.
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 37" TO 39".



	24 H	70°F/21°C	50°F/10°C	90°F/32°C	70°F/21°C	lbs (Kg)	in (mm)	in (mm)	SPIKA HALF DICE 0.9" (W) x 0.43" (D) x 1.02" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 360 A		353 (152)		282 (128)		99 (45)	Width 30" (762) Depth 30" (762) Height* 32.76" (832)	Width 33.08" (840) Depth 32.48" (825) Height 37.41" (950)	SPIKA FULL DICE 1.02" (W) x 0.9" (D) x 1.02" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 360 W		-		-					

* WITH LEGS 37"/39"

ACCESSORIES

INCLUDED



NOT INCLUDED (OPTIONAL)

