



## Refrigeration Equipment Bar Equipment 3-glass door Refrigerator, 20.8 cu.ft, 72" (R290)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Bar Equipment 3-glass door Refrigerator, 20.8 cu.ft, 72" (R290)

**738274 (KCHBB72G)**

3-door back bar refrigerator  
with glass door, 72", R290  
refrigerant gas, +33/+41°C

### Short Form Specification

#### Item No. \_\_\_\_\_

Back bar refrigerator with glass doors. Exterior back and bottom panel in galvanized steel, top panel in 304 stainless steel and exterior panel in painted steel; interior back and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control.

Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

APPROVAL: \_\_\_\_\_

### Main Features

- External digital temperature display.
- External temperature display.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.

### Construction


- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

### Optional Accessories

- 3 shelves for 72" back bar (one right and one left shelves) ☐ PNC 880610
- shelf clips ☐ PNC 880611



## Refrigeration Equipment Bar Equipment 3-glass door Refrigerator, 20.8 cu.ft, 72" (R290)

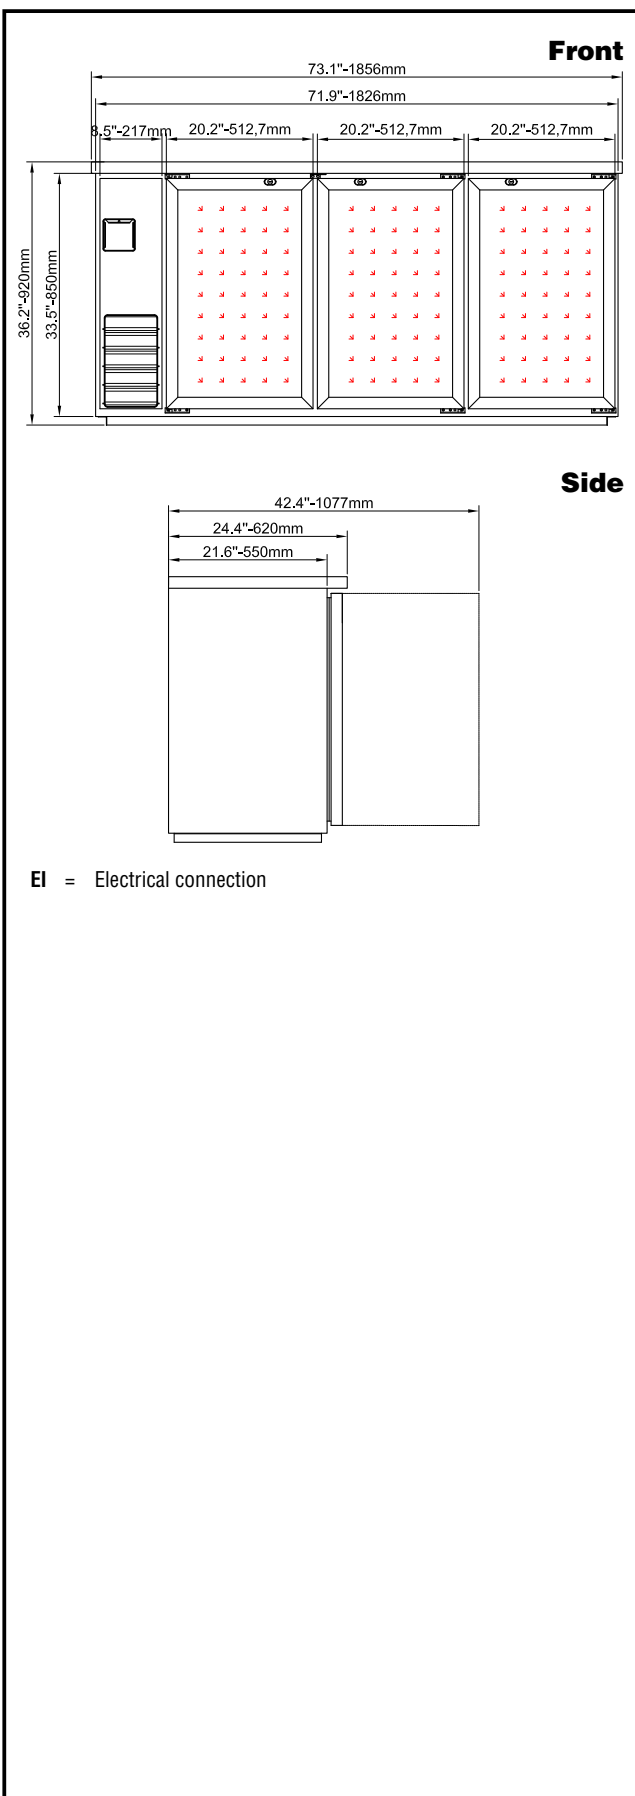

### Electric

#### Supply voltage:

738274 (KCHBB72G) 115 V/1 ph/60 Hz

#### Electrical power, max:

0.3 kW

#### Current consumption:

3 Amps

#### Plug type:

USA NEMA 5-15P

### Capacity:

Gross capacity: 20.8 cu.feet

### Key Information:

Door hinges:	1 Left+2 Right
External dimensions, Width:	73 1/16" (1856 mm)
External dimensions, Depth:	24 7/16" (620 mm)
External dimensions, Height:	36 3/16" (919.48 mm)
Number and type of doors:	3 Glass
Internal Dimensions (depth):	18 1/2"
Internal Dimensions (height):	28 15/16"
Internal Dimensions (width):	60 3/16"
Shipping height:	41 5/16" (1050 mm)
Shipping weight:	417 lbs (189 kg)
Shipping volume:	47.8 ft <sup>3</sup> (1.35 m <sup>3</sup> )
Number and type of grids (included):	6 - Vinyl-Coated Steel
Type of external material:	Black Prepainted Steel
Type of internal material:	Stainless Steel
Warranty:	3 / 5 years

### Refrigeration Data

Compressor Horsepower:	1/4
Refrigerant type:	R290
Refrigerant weight:	130 g
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube



### Refrigeration Equipment Bar Equipment 3-glass door Refrigerator, 20.8 cu.ft, 72" (R290)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2021.03.18