



PROJECT NAME: \_\_\_\_\_

LOCATION: \_\_\_\_\_

ITEM: \_\_\_\_\_ QTY: \_\_\_\_\_

MODEL: \_\_\_\_\_

## GAS STOCK POT SRSP SERIES SRSP181 | SRSP182



### SRSP182

Unit shown with optional casters. Unit ships with legs as standard

Sierra Gas Stock Pot 100% manufactured from raw materials to provide the best cooking experience, a high standard of quality, and the highest durability in its class to meet the needs of a commercial kitchen.

## STANDARD FEATURES

### STOCK POT RANGE

- Stock Pot Range: (1) 3-Ring Burner and (2) 3-Ring Burners.
- Stainless steel panel and sides.
- 18" x 21" cast iron top grates designed for easy movement of pots across top sections.
- Deflectors to direct waste to crumb/drip pan.
- Large front panel, promoting safety and great functionality.
- Orange paint injected aluminum knobs providing for better toughness and durability.
- Lower cabinet storage cavity.
- Easily removable stainless steel crumb/drip pan.
- Heavy duty legs with adjustable feet.
- Units are shipped ready for Natural Gas(NG). A Propane Gas(LP) conversion kit and NG/LP regulator is supplied with the unit.

### THREE RING BURNER

- 90,000 BTU total output per burner.
- Heat selection from simmer to high heat.
- Burner utilizes two adjustable gas valves for the inner and outer rings.

## ACCESSORIES/OPTIONAL

- (6) 6" swivel casters with front locking brakes.
- Propane Gas(LP)/Natural Gas(NG) conversion kits.



SRSP042222



3560 NW 56th Street  
Fort Lauderdale, FL 33309

Tel.: 786.600.4687 / Toll Free: 844.218.8477  
Fax.: 786.661.4100




5659 Royalmount Avenue  
Montreal, Qc, Canada H4P 2P9

Tel.: 514.737.9701 / Toll Free: 888.275.4538  
Fax.: 514.342.3854 / Toll Free: 877.453.8832  
sales@mvpgroupcorp.com



www.mvpgroupcorp.com

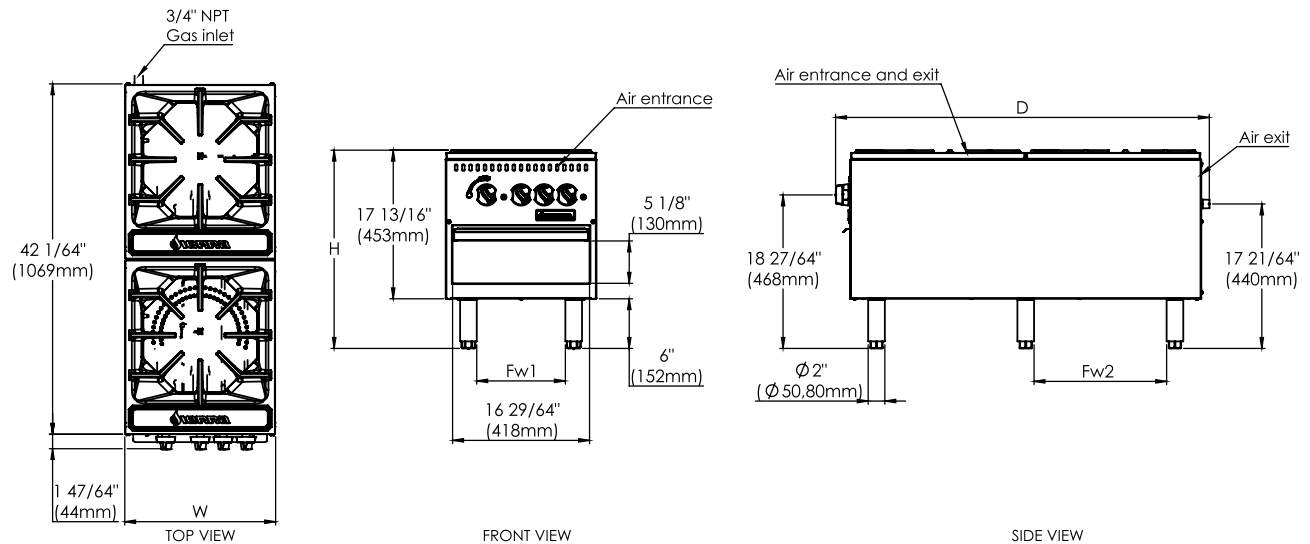

## SPECIFICATIONS

Models	Exterior Product Dimensions & Weight					Shipping Crate Dimensions & Weight				
	Width (W)	Depth (D)	Height (H)	Fw		Weight	Width	Depth	Height	Weight
				Fw1	Fw2					
SRSP181	18" (460 mm)	23 53/64" (605 mm)	23 13/16" (605 mm)	10 5/8" (270 mm)	12 51/64" (325 mm)	104 lb (47 kg)	22 3/64" (560 mm)	28 35/64" (725 mm)	24 31/64" (622 mm)	121 lb (55 kg)
SRSP182		44 7/8" (1140 mm)			33 13/16" (859 mm)	196 lb (89 kg)		46 29/64" (1.180 mm)	24 31/64" (622 mm)	222 lb (101 kg)

## UTILITY INFORMATION

GAS SUPPLY					
Models	3-Rings Burners	Propane	Natural	Manifold Pressure	
		BTU/h	BTU/h	Natural Gas	Propane Gas
SRSP181	1	90,000	90,000	5" W.C	10" W.C
SRSP182	2	180,000	180,000		

- 90,000 BTU total output per burner.
- Manifold pressure is 5" W.C (Natural Gas) or 10" W.C (Propane Gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.

\* NOTE: In line with its policy to continually improve its product, Sierra Range reserves the right to change materials and specifications without notice.

## INSTALLATION INSTRUCTIONS

A pressure regulator sized for this unit is included. The gas line connecting to the range must be 3/4" or larger. If flexible connectors are used, the inside diameter must be 3/4" or larger. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, [www.NFPA.org](http://www.NFPA.org). When writing, refer to NFPA No. 96.4. These units are manufactured for installation in accordance with ANSI Z223.1A (latest edition), National Fuel Gas Code.

Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, [www.AGA.org](http://www.AGA.org).